



CATALOG


UNDERMOUNT SLIDES



TOUCH UNDERMOUNT DRAWER SLIDES

Our Undermount Slides represent the pinnacle of modern cabinetry hardware, designed to provide smooth, quiet, and reliable drawer operation. Engineered for both residential and commercial applications, these slides offer the perfect blend of functionality and aesthetics. With features like soft-close mechanisms, push-open functionality, and synchronized movement, our undermount drawer slides ensure that every drawer opens and closes with ease and precision. Compatible with both frameless and face frame cabinets, they are the ideal choice for any modern kitchen, office, or retail environment. Whether you're seeking enhanced convenience, safety, or simply a more elegant drawer system, our undermount drawer slides deliver exceptional performance and long-lasting durability.

Touch Cabinets Hardware

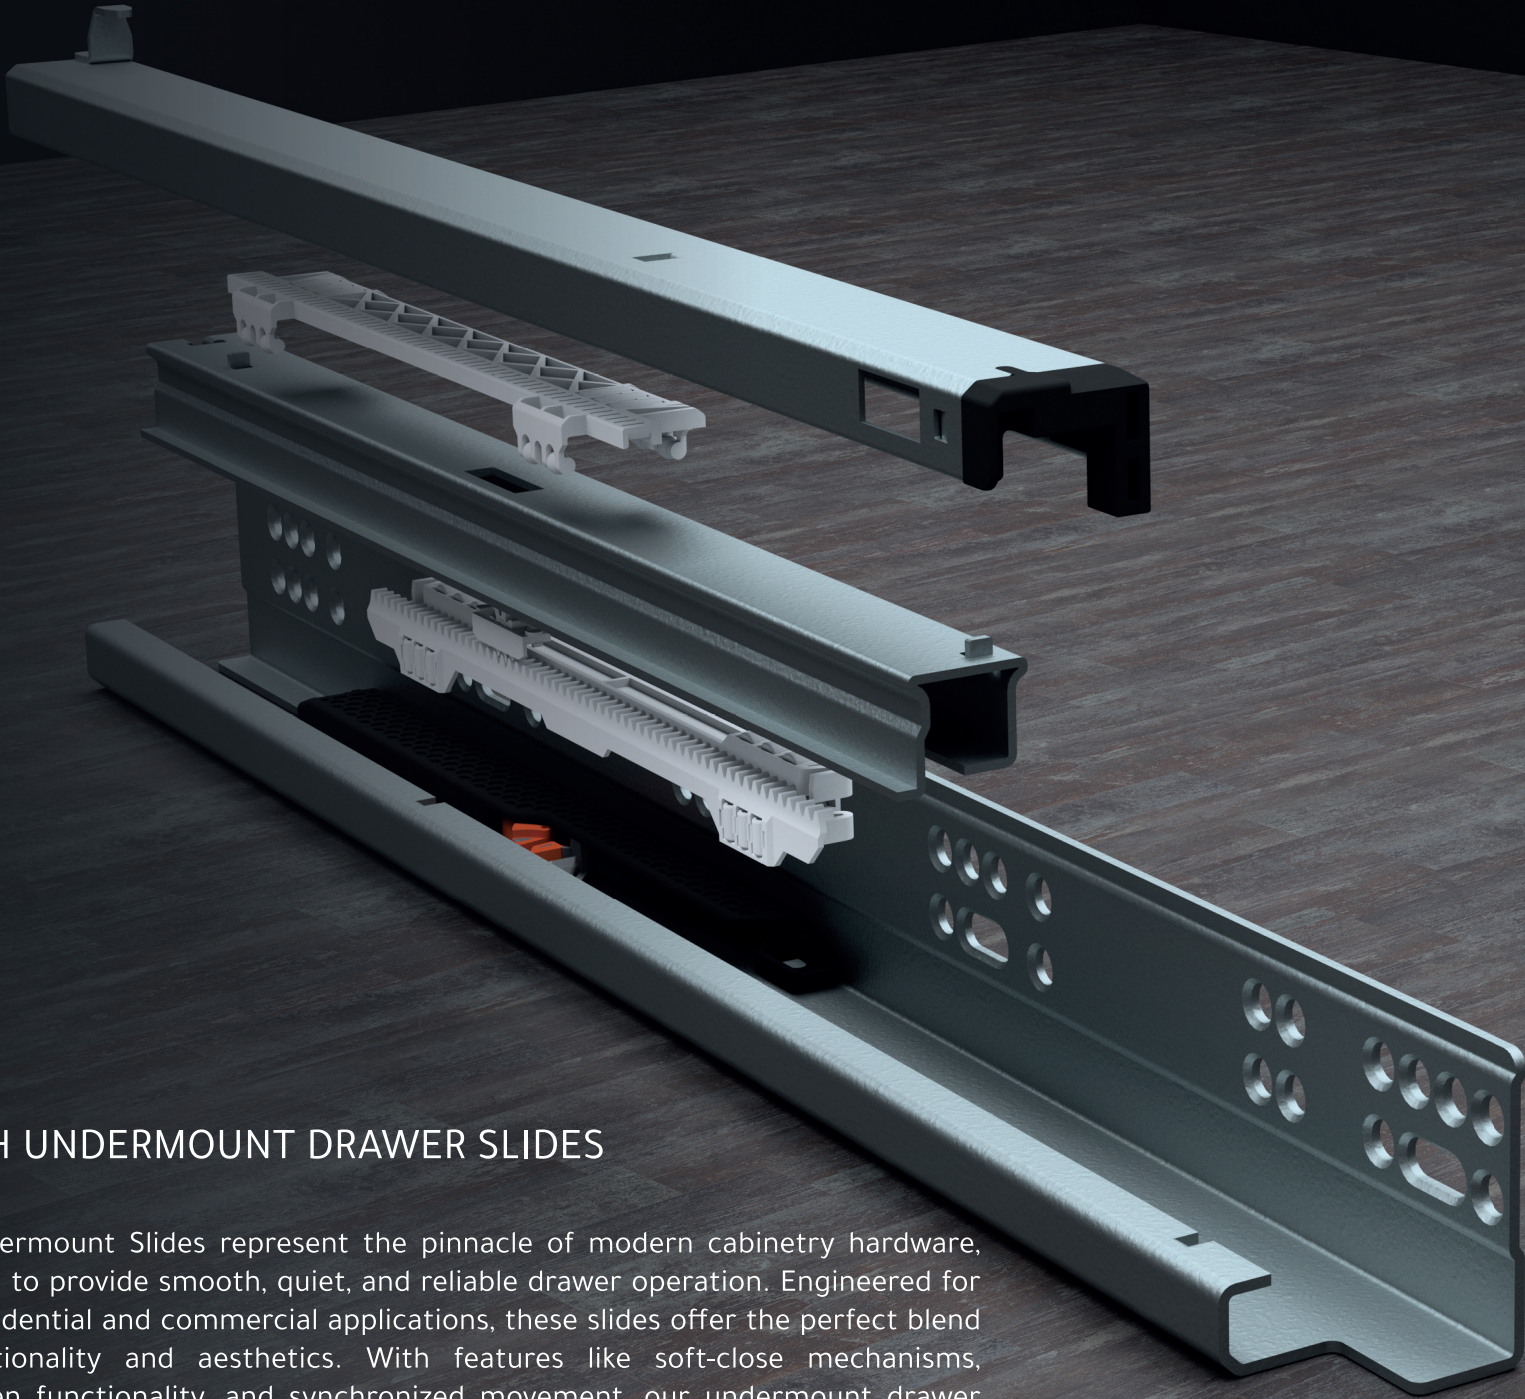

CONTENTS

GENERAL SPECIFICATIONS

Using Undermount Slides	02
Clip Device and Runner Adjustment	03

SOFT CLOSE UNDERMOUNT SLIDES

TCH-23101 - 16MM	06
TCH-23101 - 19MM	08
TCH-23102 - 16MM	10
TCH-23102 - 19MM	12
TCH-23103 - 16MM	14
TCH-23103 - 19MM	16
TCH-23104 - 16MM	18
TCH-23104 - 19MM	20
TCH-23105 - 16MM	22
TCH-23105 - 19MM	24

PUSH-OPEN UNDERMOUNT SLIDES

TCH-23301 - 16MM	28
TCH-23301 - 19MM	30
TCH-23301.S - 16MM	32
TCH-23301.S - 19MM	34
TCH-23302 - 16MM	36
TCH-23302 - 19MM	38
TCH-23302.S - 16MM	40
TCH-23302.S - 19MM	42
TCH-23303 - 16MM	44
TCH-23303 - 19MM	46
TCH-23303.S - 16MM	48
TCH-23303.S - 19MM	50
TCH-23304 - 16MM	52
TCH-23304 - 19MM	54
TCH-23304.S - 16MM	56
TCH-23304.S - 19MM	58
TCH-23305 - 16MM	60
TCH-23305 - 19MM	62

PUSH-OPEN SOFT CLOSE UNDERMOUNT SLIDES

TCH-23403 - 16MM	66
TCH-23403 - 19MM	68
TCH-23404 - 16MM	70
TCH-23404 - 19MM	72

ADDITIONAL SPECIFICATIONS AND INSTALLATIONS

Inset Drawer Setback Specification	74
Synchronized System Installation	75

METAL DRAWER SYSTEM

TCH-25201	78
TCH-25202	80
TCH-25203	82

ADDITIONAL SPECIFICATIONS AND INSTALLATIONS

LVL-1 Drawer Box Specifications	84
LVL-2 Drawer Box Specifications	86
LVL-3 Drawer Box Specifications	88
LVL-1 Inner Drawer Specifications	90
LVL-2 Inner Drawer Specifications	92
LVL-3 Inner Drawer Specifications	94
LVL-1 Using Side Rails Specifications	96

GENERAL SPECIFICATIONS


Drawer Box and Runner Adjustment	98
----------------------------------	----



Using Undermount Slides


Step 1. Measure cabinet opening

Measurements of the cabinet opening are required to determine the size of the drawer box.

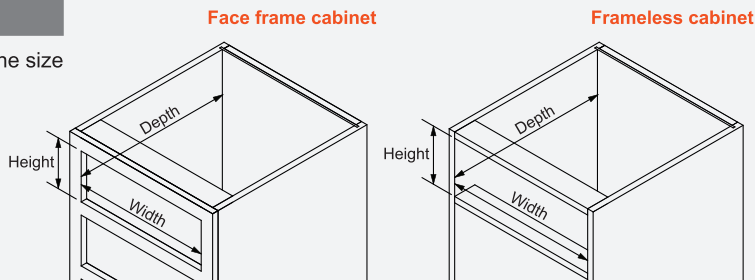


Step 2. Select undermount slides

Refer to the products pages and select the best fitting undermount slides for your application by considering factors such as drawer side thickness, load capacity, and cabinet depth. For more detailed information, please consult the relevant catalog page.




Step 3. Preparing drawer boxes

Construct the drawer based on the specifications for the selected undermount slides and the measurements determined in Step 1. Install the suitable locking devices and drill holes for the rear hooks.

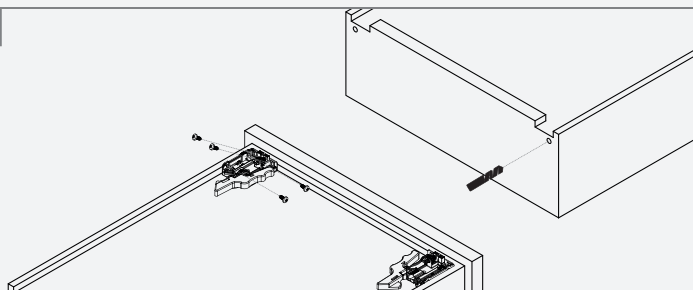


Step 4. Attach undermount slides to the cabinet

Based on the provided information for the selected undermount slides install the runners inside the cabinet.

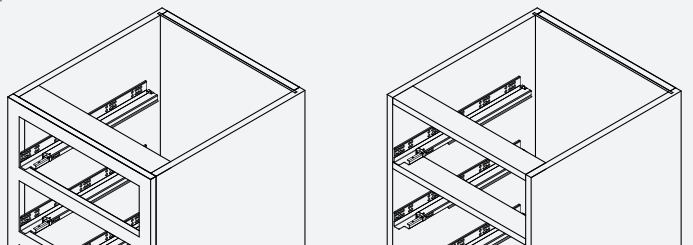


Step 5. Insert drawers

Fully extend the slides. Position the drawer on the slides and close it. The locking devices will automatically engage with the slides. Make adjustments if necessary.

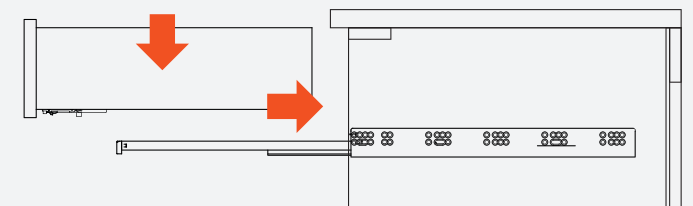

Step 6. Drawer removal

Squeeze the orange handles on the locking devices and pull the drawer straight out and upward.

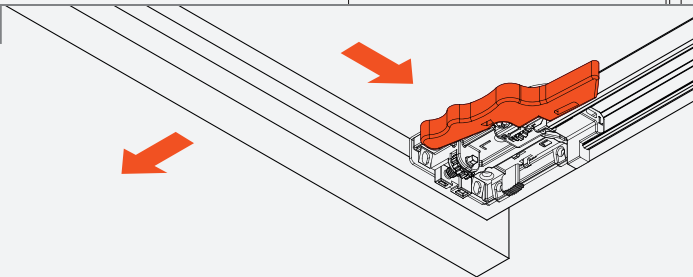


Clip Device and Runner Adjustment




Front side-to-side adjustment

Rotate the side-to-side adjustment mechanism on both locking devices equally, either forward or backward. Rotate forward to adjust the drawer front to the left, and backward to adjust it to the right.

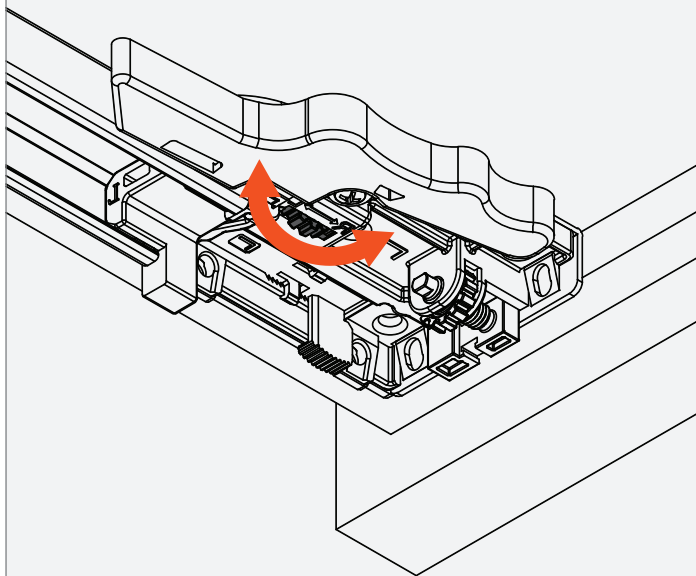


Height adjustment

Press the adjustment tab upward and push it toward the back of the drawer to adjust the height of the drawer front.

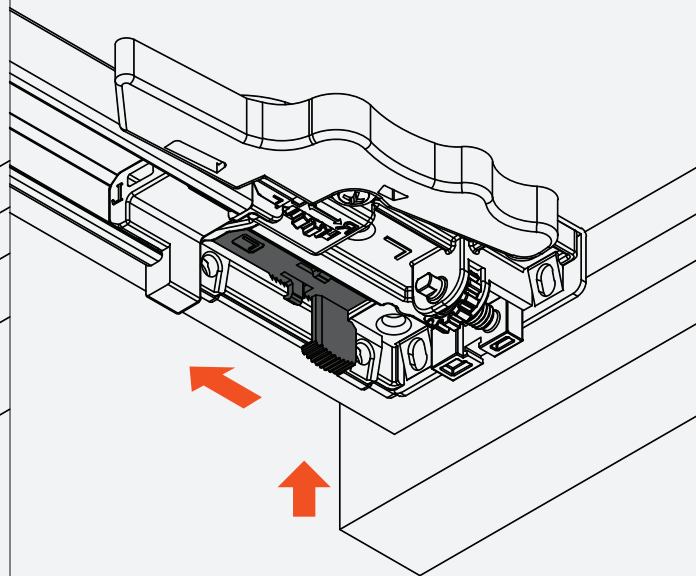


Depth adjustment

To adjust the depth of the drawer front, rotate the depth adjustment mechanism. Turn it to the right to move the drawer front outward, and to the left to move it inward.

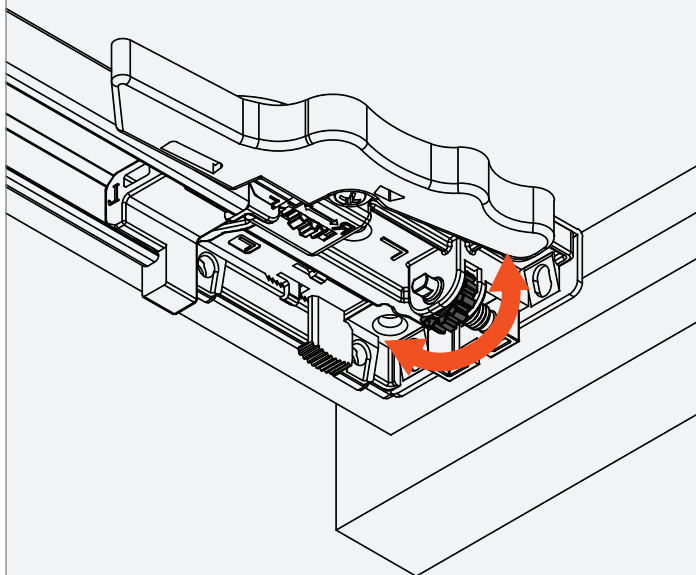

Depth adjustment on runner

Runners have elongated slots that permit a depth adjustment ± 4.5 mm (3/16").

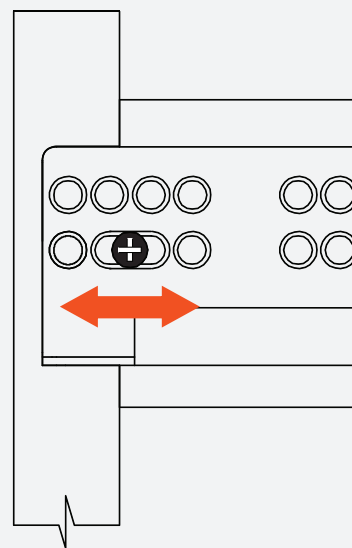


SOFT CLOSE UNDERMOUNT

Experience the ultimate in drawer functionality with our Soft-Close Undermount Drawer Slides-designed to offer a smooth, silent, and effortless closing experience. Ideal for modern cabinetry, these slides not only enhance the ease of use but also add a touch of sophistication to your drawers, ensuring they close gently and quietly every time.

KEY FEATURES

- Concealed Design
- Engineered with Precision
- Quiet and Smooth Closure
- Compatible with Various Drawer Materials
- Suitable for Both Frameless and Face Frame Cabinets

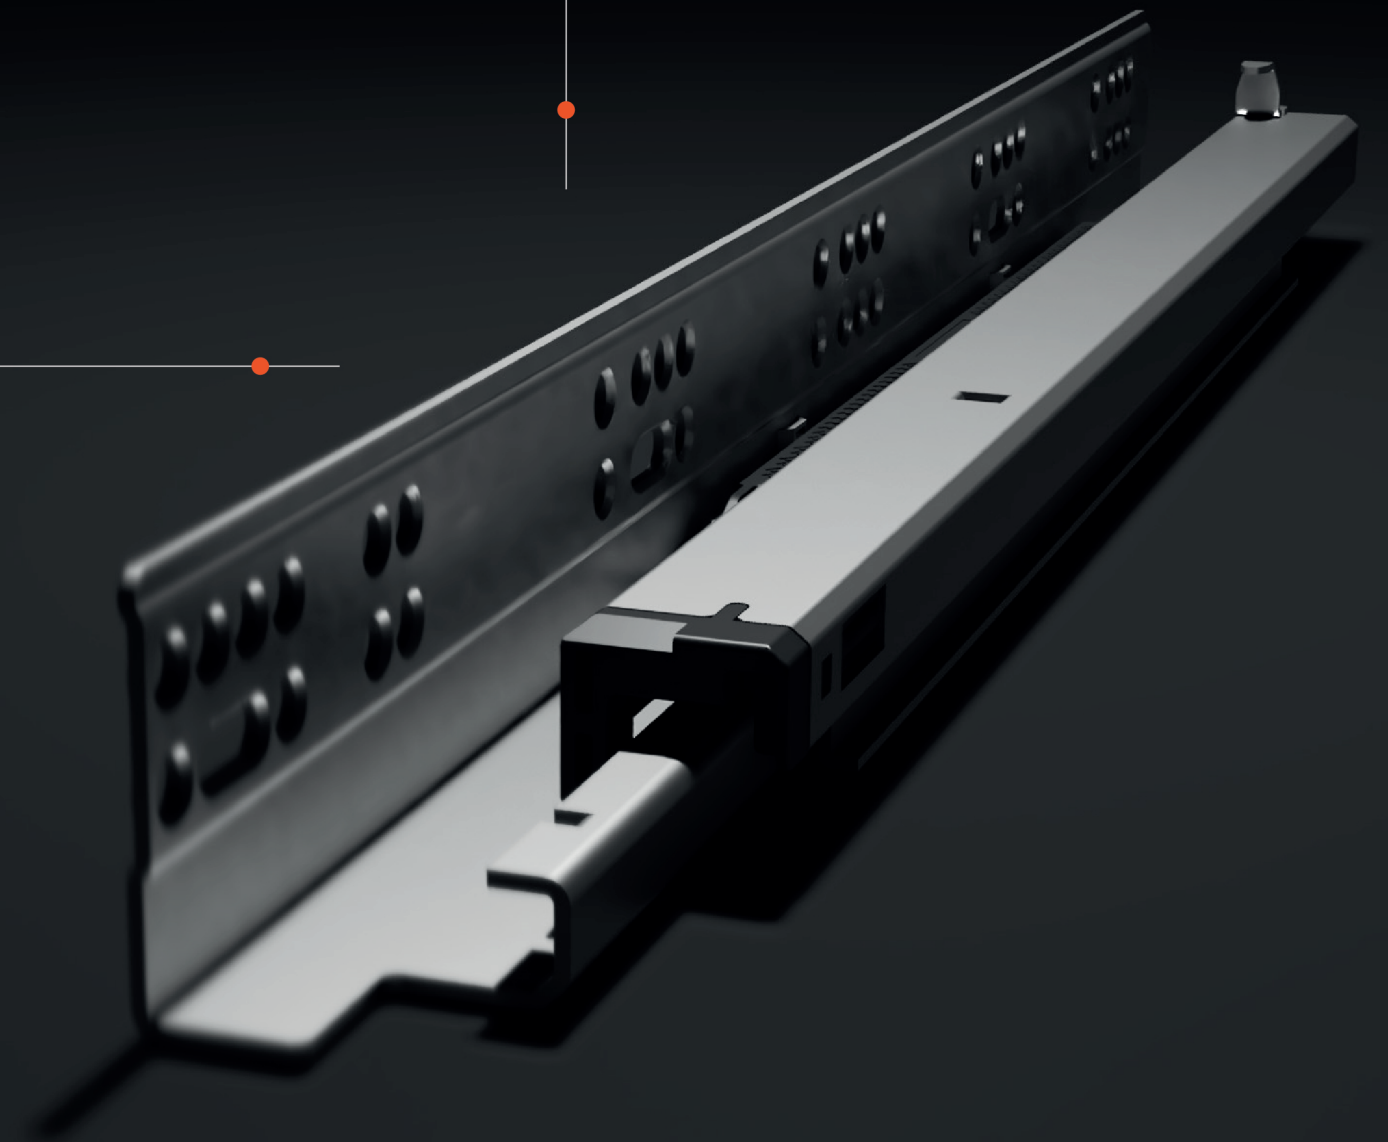



T - MOTION SOFT CLOSE UNDERMOUNT

TCH-23101 - 16MM



Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment
- Synchronized motion system

Description

- Concealed drawer runners with soft-close functionality
- Suited for frameless and blocked-out face frame cabinets
- Offered in lengths from 457mm (18") to 610mm (24")
- Compatible with material thicknesses ranging from 13mm (1/2") to 16mm (5/8")
- Ensures quiet and smooth closing through the integrated soft closing mechanism
- Streamlined concealed design allows for effortless installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



Slim Box



Inner Drawer



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23101 16.457.3D
610mm (24")	533mm (21")	TCH-23101 16.533.3D
686mm (27")	610mm (24")	TCH-23101 16.610.3D

Runner set and components



TCH-23000 T-CL.3D




TCH-23101 - 16mm

Drawer and Cabinet Specifications



Drawer box specification

Front view

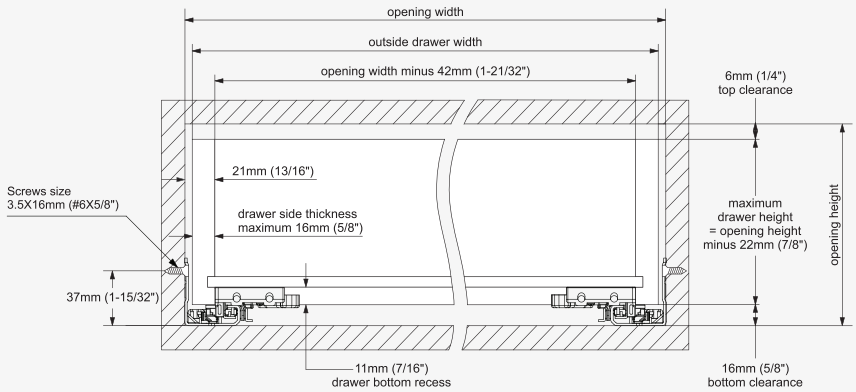

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")


Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Drawer back preparation

Rear view



Runner mounting specifications

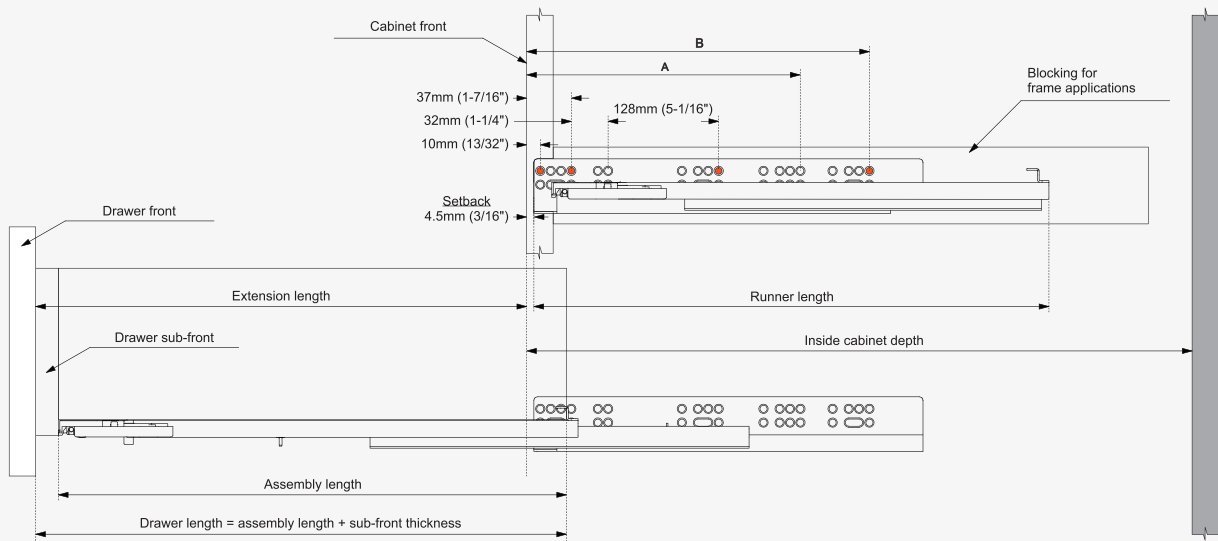

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23101 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	403mm (15-7/8")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23101 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	489mm (19-1/4")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23101 16.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	562mm (22-1/8")	261mm (10-9/32")	357mm (14-1/16")	648mm (25 1/2")



T - MOTION SOFT CLOSE UNDERMOUNT

TCH-23101 - 19MM



Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment
- Synchronized motion system

Description

- Concealed drawer runners with soft-close functionality
- Suited for frameless and blocked-out face frame cabinets
- Offered in lengths from 457mm (18") to 610mm (24")
- Compatible with material thicknesses ranging from 16mm (5/8") to 19mm (3/4")
- Ensures quiet and smooth closing through the integrated soft closing mechanism
- Streamlined concealed design allows for effortless installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



Slim Box



Inner Drawer



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23101 19.457.3D
610mm (24")	533mm (21")	TCH-23101 19.533.3D
686mm (27")	610mm (24")	TCH-23101 19.610.3D

Runner set and components



TCH-23000 T-CL.3D



TCH-23101 - 19mm

Drawer and Cabinet Specifications



Drawer box specification

Front view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23101 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	403mm (15-7/8")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23101 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	489mm (19-1/4")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23101 19.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	562mm (22-1/8")	261mm (10-9/32")	357mm (14-1/16")	648mm (25 1/2")



CLIP-ON SOFT CLOSE UNDERMOUNT

TCH-23103 - 16MM



Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with soft-close functionality
- Suitable for frameless and blocked-out face frame cabinets
- Offered in lengths from 457mm (18") to 610mm (24")
- Designed to accommodate material thicknesses from 13mm (1/2") to 16mm (5/8")
- Ensures quiet and smooth closing through the integrated soft closing mechanism
- Streamlined concealed design for easy installation
- Durable runners provide consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



PAGE 74

Slim Box



PAGE 84-89

Inner Drawer



PAGE 90-95

Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23103 16.457.3D
610mm (24")	533mm (21")	TCH-23103 16.533.3D
686mm (27")	610mm (24")	TCH-23103 16.610.3D

Runner set and components



TCH-23000 CL.3D



TCH-23103 - 16mm



Drawer and Cabinet Specifications

Drawer box specification

Front view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23103 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23103 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23103 16.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")



CLIP-ON SOFT CLOSE UNDERMOUNT

TCH-23103 - 19MM



Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with soft-close functionality
- Suitable for frameless and blocked-out face frame cabinets
- Offered in lengths from 457mm (18") to 610mm (24")
- Designed to accommodate material thicknesses from 16mm (5/8") to 19mm (3/4")
- Ensures quiet and smooth closing through the integrated soft closing mechanism
- Streamlined concealed design for easy installation
- Durable runners provide consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



Slim Box



Inner Drawer



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23103 19.457.3D
610mm (24")	533mm (21")	TCH-23103 19.533.3D
686mm (27")	610mm (24")	TCH-23103 19.610.3D

Runner set and components



TCH-23000 CL.3D




TCH-23103 - 19mm

Drawer and Cabinet Specifications



Drawer box specification

Front view

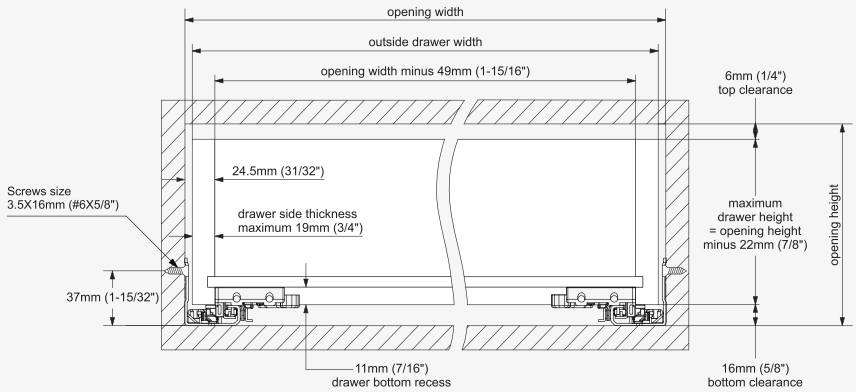

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")


Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Drawer back preparation

Rear view



Runner mounting specifications

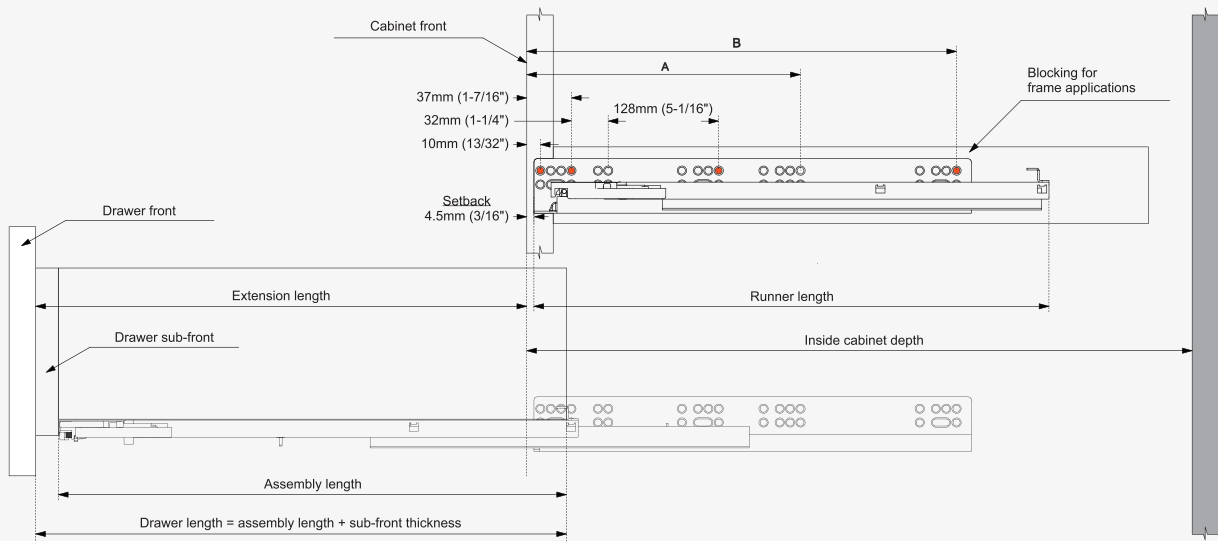

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23103 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23103 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23103 19.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")



CLIP-ON SOFT CLOSE UNDERMOUNT

TCH-23104 - 16MM



Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with soft-close functionality
- Suited for frameless and face frame cabinets
- Available in lengths from 229mm (9") to 610mm (24")
- Compatible with material thicknesses from 13mm (1/2") to 16mm (5/8")
- Ensures quiet and smooth closing through integrated soft-closing mechanism
- Streamlined concealed design facilitates effortless installation
- Durable runners guarantee consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



Slim Box



Inner Drawer



Rear mounting brackets



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
305mm (12")	229mm (9")	TCH-23104 16.229.3D
381mm (15")	305mm (12")	TCH-23104 16.305.3D
457mm (18")	381mm (15")	TCH-23104 16.381.3D
533mm (21")	457mm (18")	TCH-23104 16.457.3D
610mm (24")	533mm (21")	TCH-23104 16.533.3D
686mm (27")	610mm (24")	TCH-23104 16.610.3D

Runner set and components




Drawer and Cabinet Specifications



Drawer box specification

Front view

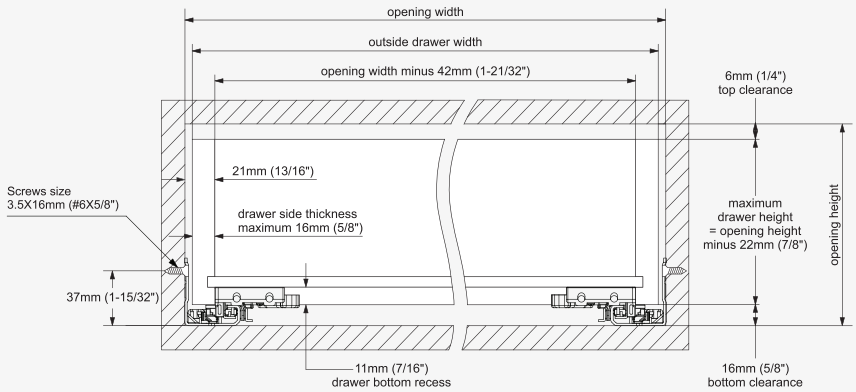

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.


Drawer back preparation

Rear view




TCH - 23000 R.P.01 Rear mounting

Front view




TCH - 23000 R.S.01 Rear mounting

Front view



Note: Use a minimum of three screws per bracket

Runner mounting specifications

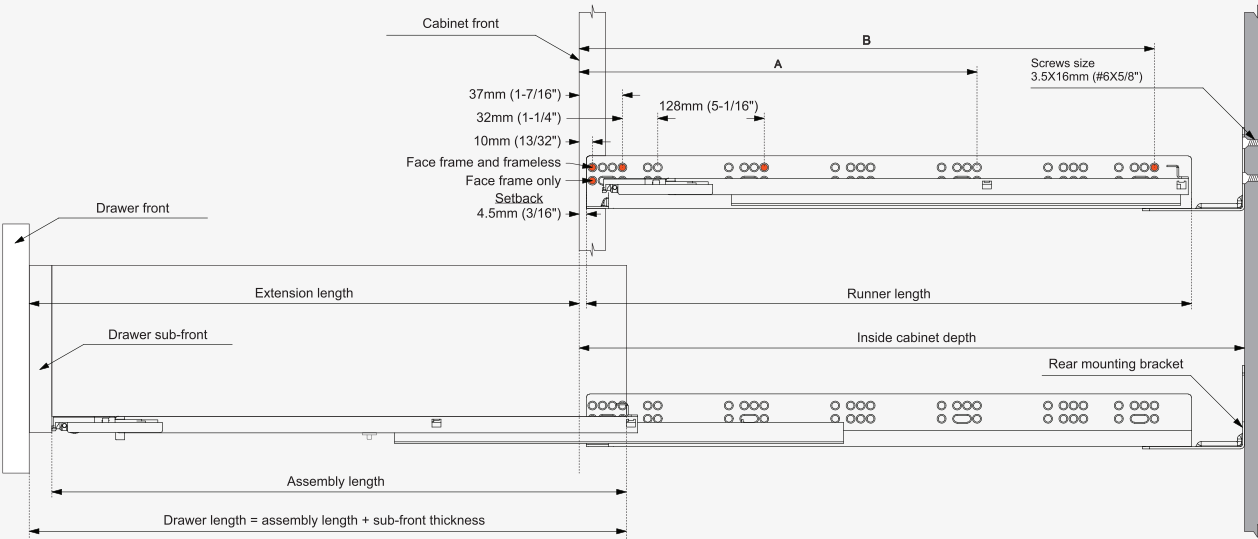

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23104 16.229.3D	229mm (9")	242mm (9-1/2")	213mm (8-3/8")	140mm (5-1/2")	-	229mm (9-1/32")	267mm (10 1/2")	292mm (11 1/2")
TCH-23104 16.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	257mm (10-1/8")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23104 16.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23104 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23104 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")
TCH-23104 16.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	357mm (14-1/16")	581mm (22-7/8")	648mm (25 1/2")	673mm (26 1/2")



CLIP-ON SOFT CLOSE UNDERMOUNT

TCH-23104 - 19MM



Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with soft-close functionality
- Suited for frameless and face frame cabinets
- Available in lengths from 229mm (9") to 610mm (24")
- Compatible with material thicknesses from 16mm (5/8") to 19mm (3/4")
- Ensures quiet and smooth closing through integrated soft-closing mechanism
- Streamlined concealed design facilitates effortless installation
- Durable runners guarantee consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



PAGE 74

Slim Box



PAGE 84-89

Inner Drawer



PAGE 90-95

Rear mounting brackets



TCH-23000 R.P.01



TCH-23000 R.S.01

Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
305mm (12")	229mm (9")	TCH-23104 19.229.3D
381mm (15")	305mm (12")	TCH-23104 19.305.3D
457mm (18")	381mm (15")	TCH-23104 19.381.3D
533mm (21")	457mm (18")	TCH-23104 19.457.3D
610mm (24")	533mm (21")	TCH-23104 19.533.3D
686mm (27")	610mm (24")	TCH-23104 19.610.3D

Runner set and components



TCH-23000 CL.3D




TCH-23104 - 19mm

Drawer and Cabinet Specifications



Drawer box specification

Front view

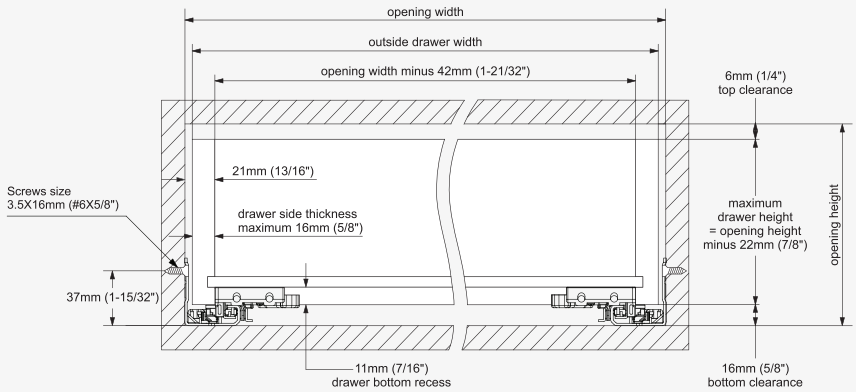

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.


Drawer back preparation

Rear view




TCH - 23000 R.P.01 Rear mounting

Front view




TCH - 23000 R.S.01 Rear mounting

Front view



Note: Use a minimum of three screws per bracket

Runner mounting specifications

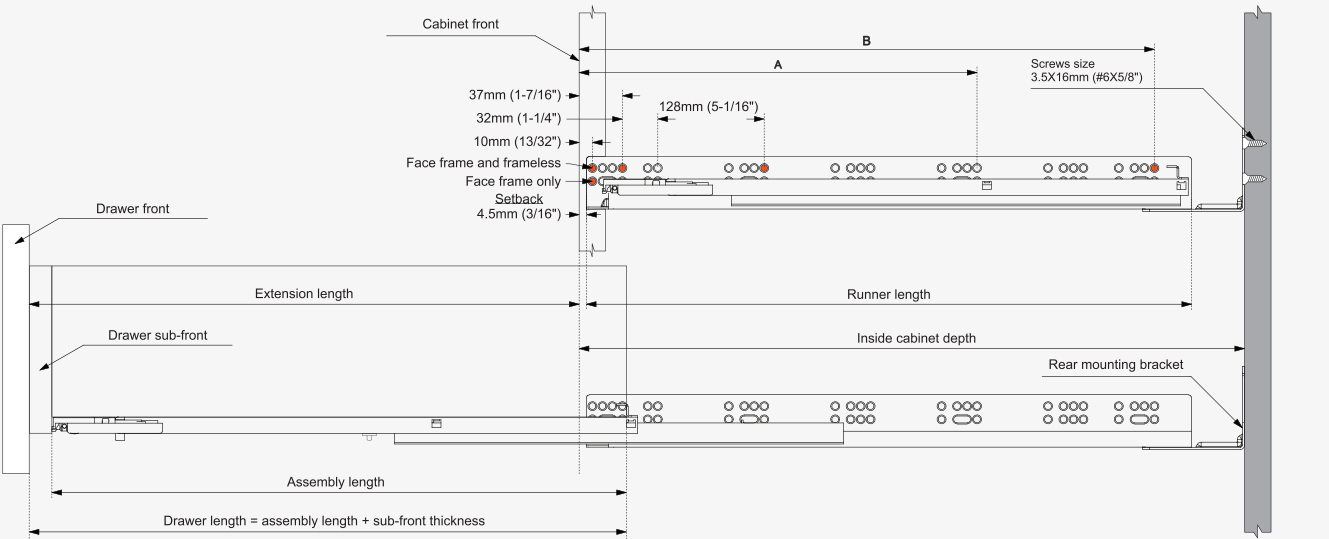

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23104 19.229.3D	229mm (9")	242mm (9-1/2")	213mm (8-3/8")	140mm (5-1/2")	-	229mm (9-1/32")	267mm (10 1/2")	292mm (11 1/2")
TCH-23104 19.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	257mm (10-1/8")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23104 19.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23104 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23104 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")
TCH-23104 19.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	357mm (14-1/16")	581mm (22-7/8")	648mm (25 1/2")	673mm (26 1/2")



CLIP-ON SOFT CLOSE HEAVY DUTY UNDERMOUNT SLIDES

TCH-23105 - 16MM



Features

- 50kg (110lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with soft-close mechanism
- Well-suited for frameless and blocked-out face frame cabinets
- Offered in lengths from 381mm (15") to 610mm (24")
- Compatible with material thicknesses ranging from 13mm (1/2") to 16mm (5/8")
- Ensures quiet and smooth closing through an integrated soft-closing mechanism
- Streamlined concealed design for easy installation
- Durable runners provide consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



Slim Box



Inner Drawer



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
457mm (18")	381mm (15")	TCH-23105 16.381.3D
533mm (21")	457mm (18")	TCH-23105 16.457.3D
610mm (24")	533mm (21")	TCH-23105 16.533.3D
686mm (27")	610mm (24")	TCH-23105 16.610.3D

Runner set and components



TCH-23000 T-CL.3D



TCH-23105 - 16mm



Drawer and Cabinet Specifications

Drawer box specification

Front view

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23105 16.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")
TCH-23105 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	421mm (16-9/16")	495mm (19 1/2")
TCH-23105 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")
TCH-23105 16.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	357mm (14-1/16")	549mm (21-5/8")	648mm (25 1/2")



CLIP-ON SOFT CLOSE HEAVY DUTY UNDERMOUNT SLIDES

TCH-23105 - 19MM



Features

- 50kg (110lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with soft-close mechanism
- Well-suited for frameless and blocked-out face frame cabinets
- Offered in lengths from 381mm (15") to 610mm (24")
- Compatible with material thicknesses ranging from 16mm (5/8") to 19mm (3/4")
- Ensures quiet and smooth closing through an integrated soft-closing mechanism
- Streamlined concealed design for easy installation
- Durable runners provide consistently smooth and controlled drawer glide

Applications



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
457mm (18")	381mm (15")	TCH-23105 19.381.3D
533mm (21")	457mm (18")	TCH-23105 19.457.3D
610mm (24")	533mm (21")	TCH-23105 19.533.3D
686mm (27")	610mm (24")	TCH-23105 19.610.3D

Runner set and components



TCH-23000 T-CL.3D



TCH-23105 - 19mm



Drawer and Cabinet Specifications

Drawer box specification

Front view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.


Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23105 19.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")
TCH-23105 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	421mm (16-9/16")	495mm (19 1/2")
TCH-23105 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")
TCH-23105 19.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	357mm (14-1/16")	549mm (21-5/8")	648mm (25 1/2")

PUSH-OPEN UNDERMOUNT

Discover the convenience and sleek design of our Push-Open Undermount Drawer Slides-crafted to provide effortless access with a simple push. Say goodbye to handles and knobs, and enjoy a clean, minimalist look that's perfect for modern cabinetry. Ideal for both residential and commercial spaces, these slides combine style and functionality for a seamless drawer experience.

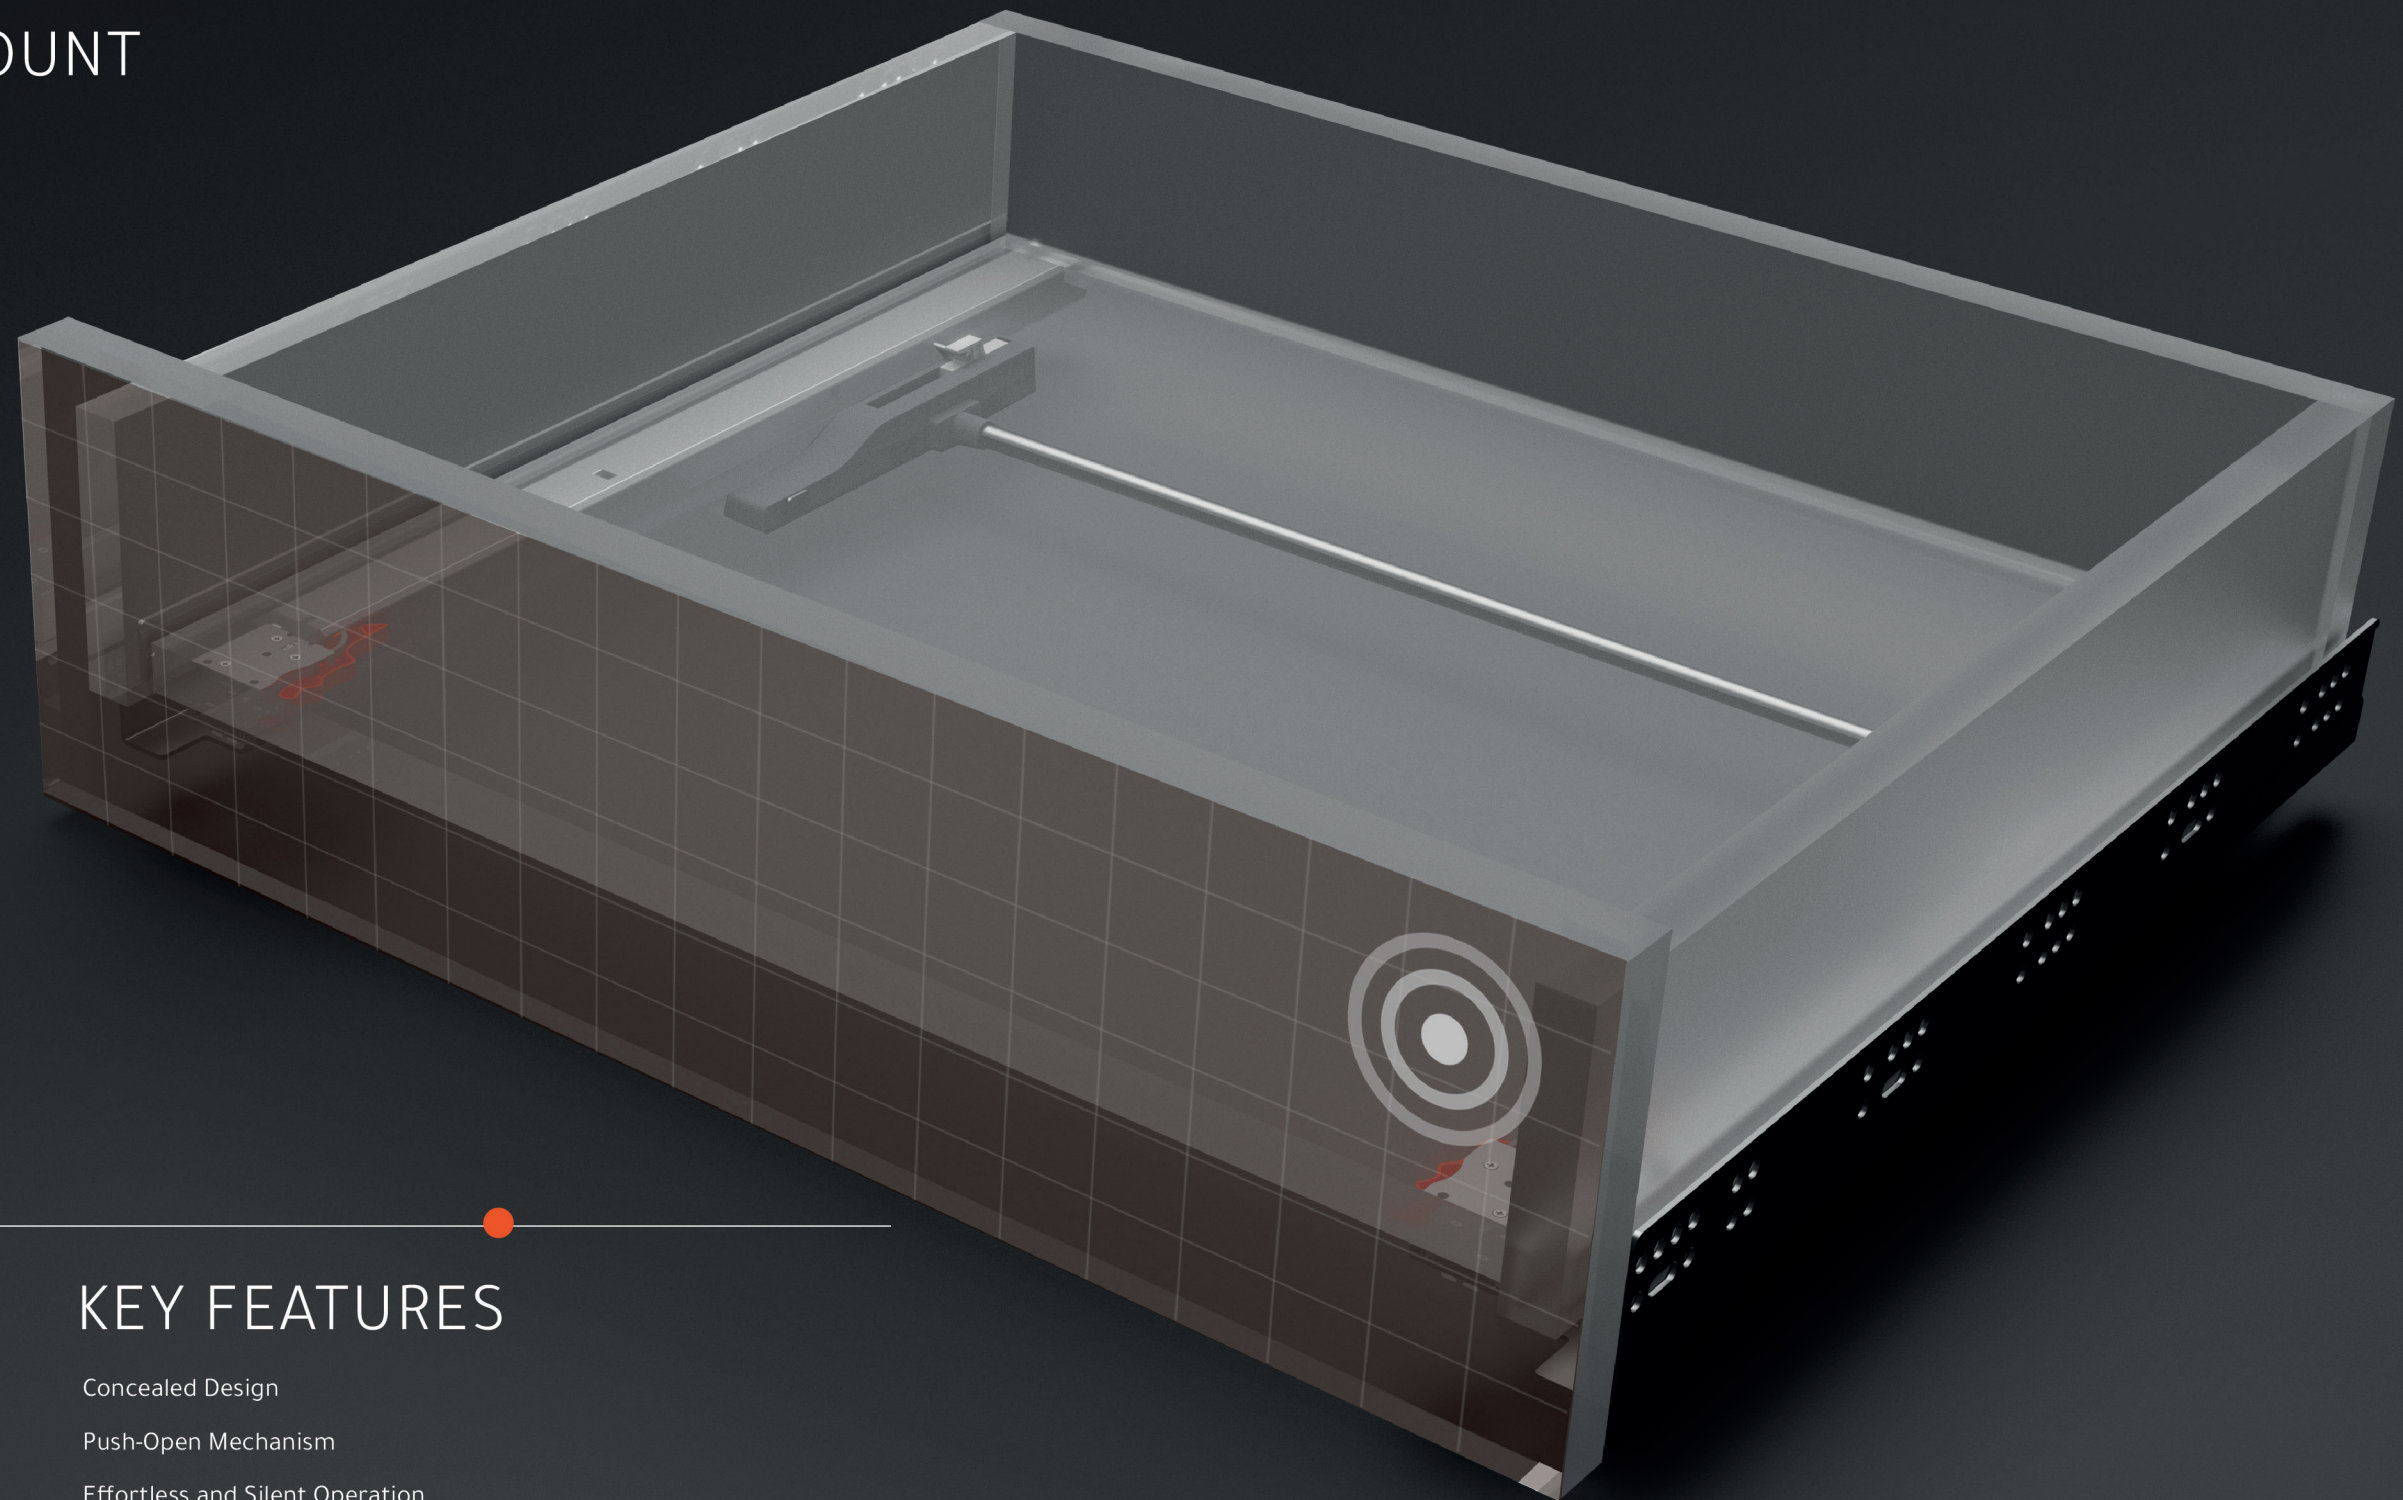

KEY FEATURES

- Concealed Design
- Push-Open Mechanism
- Effortless and Silent Operation
- Compatible with Various Drawer Materials
- Suitable for Both Frameless and Face Frame Cabinets





T - MOTION PUSH-OPEN UNDERMOUNT

TCH-23301 - 16MM



Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment
- Synchronized motion system



Description

- Concealed drawer runners with push-open functionality
- Suited for frameless and blocked-out face frame cabinets
- Offered in lengths from 457mm (18") to 610mm (24")
- Compatible with material thicknesses ranging from 13mm (1/2") to 16mm (5/8")
- Enables effortless opening of the drawer via the push latch mechanism with a gentle touch on the drawer front
- Streamlined concealed design allows for effortless installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications



Rear mounting brackets



Runner set and components



Drawer and Cabinet Specifications

Drawer box specification

Front view

Drawer back preparation

Rear view

Runner mounting specifications



T - MOTION PUSH-OPEN UNDERMOUNT

TCH-23301 - 19MM



Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment
- Synchronized motion system



Description

- Concealed drawer runners with push-open functionality
- Suited for frameless and blocked-out face frame cabinets
- Offered in lengths from 457mm (18") to 610mm (24")
- Compatible with material thicknesses ranging from 16mm (5/8") to 19mm (3/4")
- Enables effortless opening of the drawer via the push latch mechanism with a gentle touch on the drawer front
- Streamlined concealed design allows for effortless installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications



Rear mounting brackets



Runner set and components



Drawer and Cabinet Specifications

Drawer box specification

Front view

Drawer back preparation

Rear view

Runner mounting specifications



CLIP-ON PUSH-OPEN SYNCHRONIZED UNDERMOUNT

TCH-23301.S - 16MM



Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment
- Motion synchronization stabilizer

Description

- Concealed drawer runners with push-open mechanism
- Perfectly suited for frameless and blocked-out face frame cabinets
- Offered in lengths from 457mm (18") to 610mm (24")
- Designed for material thicknesses ranging from 13mm (1/2") to 16mm (5/8")
- Facilitates effortless opening of the drawer through a gentle touch on the front
- Recommended for drawer widths spanning from 610mm (24") to 1220mm (48")
- Durable runners ensure consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



Slim Box



Inner Drawer



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23301.S 16.457.3D
610mm (24")	533mm (21")	TCH-23301.S 16.533.3D
686mm (27")	610mm (24")	TCH-23301.S 16.610.3D

Runner set and components



TCH-23000 CL.3D



TCH-23301.S - 16mm

Drawer and Cabinet Specifications



Drawer box specification

Rear view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23301.S 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23301.S 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23301.S 16.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")



CLIP-ON PUSH-OPEN SYNCHRONIZED UNDERMOUNT

TCH-23301.S - 19MM



Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment
- Motion synchronization stabilizer

Description

- Concealed drawer runners with push-open mechanism
- Perfectly suited for frameless and blocked-out face frame cabinets
- Offered in lengths from 457mm (18") to 610mm (24")
- Designed for material thicknesses ranging from 13mm (1/2") to 16mm (5/8")
- Facilitates effortless opening of the drawer through a gentle touch on the front
- Recommended for drawer widths spanning from 610mm (24") to 1220mm (48")
- Durable runners ensure consistently smooth and controlled drawer glide

Applications



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23301.S 19.457.3D
610mm (24")	533mm (21")	TCH-23301.S 19.533.3D
686mm (27")	610mm (24")	TCH-23301.S 19.610.3D

Runner set and components



Drawer and Cabinet Specifications



Drawer box specification

Rear view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23301.S 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23301.S 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23301.S 19.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")



TCH-23302 - 16MM



- 34kg (75lb) static load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment
- Synchronized motion system

Description

- Concealed drawer runners with soft-close mechanism
- Suited for both frameless and face frame cabinets
- Offered in lengths from 305mm (12") to 533mm (21")
- Compatible with material thicknesses from 13mm (1/2") to 16mm (5/8")
- Ensures quiet and smooth closing through integrated soft-close technology
- Streamlined concealed design facilitates effortless installation
- Durable runners provide consistent smoothness and control for drawer glide

Applications

Standard Applications



Slim Box



Rear mounting brackets



TCH-23000 R.P.01

TCH-23000 R.S.01



Runner set and components



Cabinet and runner comparison


Overall cabinet depth	Drawer length	Runner SKU number
381mm (15")	305mm (12")	TCH-23302 16.305.3D
457mm (18")	381mm (15")	TCH-23302 16.381.3D
533mm (21")	457mm (18")	TCH-23302 16.457.3D
610mm (24")	533mm (21")	TCH-23302 16.533.3D

Drawer and Cabinet Specifications



Drawer box specification

Front view

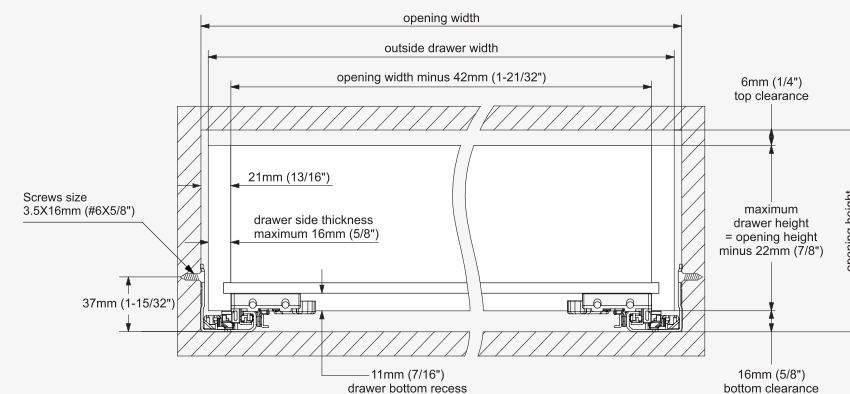

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.


Drawer back preparation

Rear view




TCH - 23000 R.P.01 Rear mounting

Front view




TCH - 23000 R.S.01 Rear mounting

Front view



Note:
Use a minimum
of three screws
per bracket

Runner mounting specifications

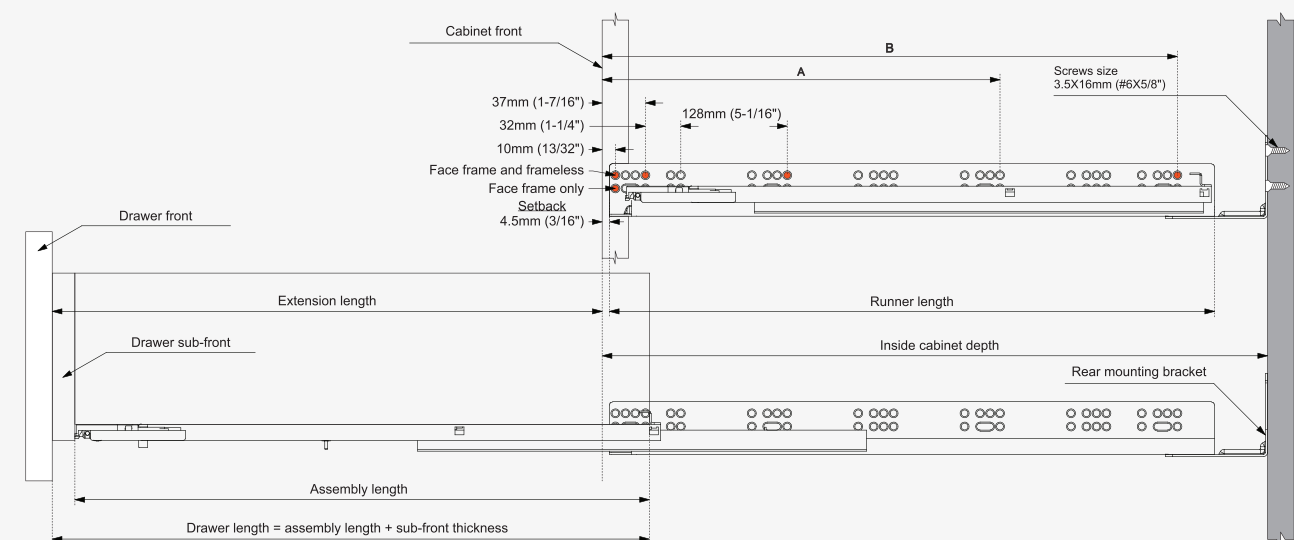

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23302 16.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	249mm (9-13/16"	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23302 16.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	337mm (13-9/32")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23302 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	403mm (15-7/8")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23302 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	489mm (19-1/4")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")



T - MOTION PUSH OPEN UNDERMOUNT

TCH-23302 - 19MM



Features

- 34kg (75lb) static load capacity
 - Six-way dimensional adjustment clip device
 - Elongated holes for depth adjustment
 - Synchronized motion system
- Description
- Concealed drawer runners with soft-close mechanism
 - Suited for both frameless and face frame cabinets
 - Offered in lengths from 305mm (12") to 533mm (21")
 - Compatible with material thicknesses from 16mm (5/8") to 19mm (3/4")
 - Ensures quiet and smooth closing through integrated soft-close technology
 - Streamlined concealed design facilitates effortless installation
 - Durable runners provide consistent smoothness and control for drawer glide

Applications



Rear mounting brackets



Runner set and components




Drawer and Cabinet Specifications




Drawer box specification

Front view

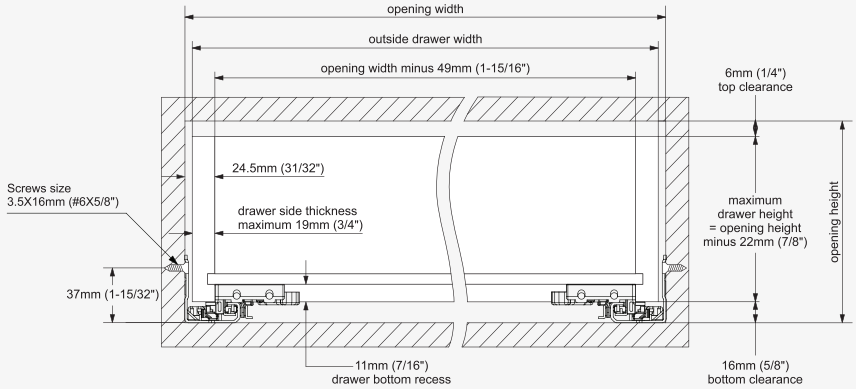


Drawer back preparation

Rear view




TCH - 23000 R.P.01 Rear mounting

Front view



TCH - 23000 R.S.01 Rear mounting

Front view



Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Note: Use a minimum of three screws per bracket

Runner mounting specifications

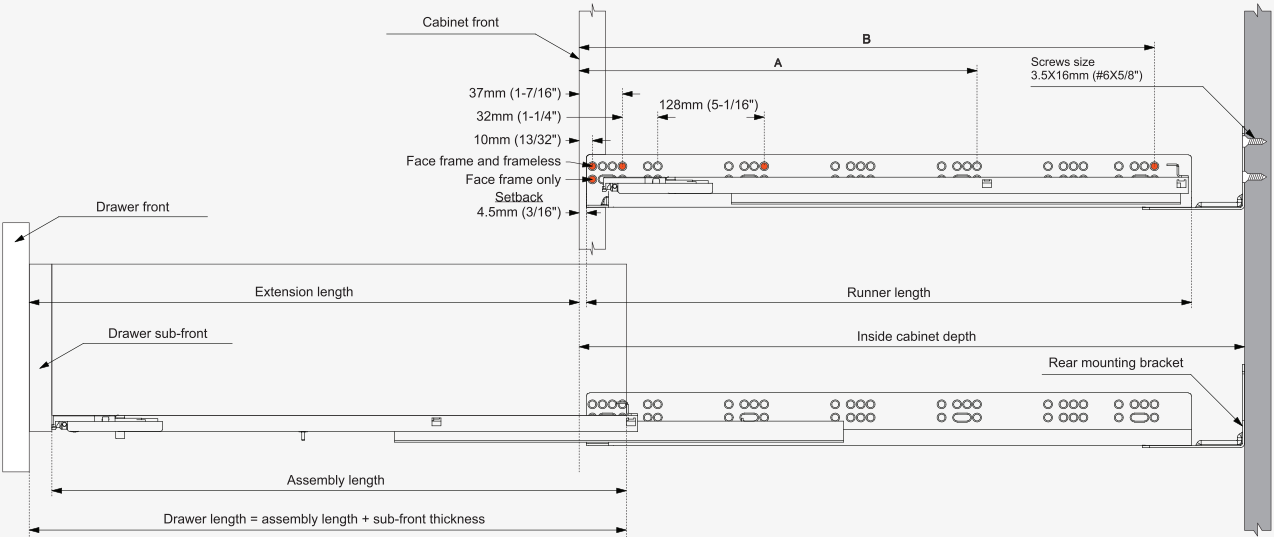

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23302 19.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	249mm (9-13/16")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23302 19.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	337mm (13-9/32")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23302 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	403mm (15-7/8")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23302 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	489mm (19-1/4")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")



CLIP-ON PUSH-OPEN SYNCHRONIZED UNDERMOUNT

TCH-23302.S - 16MM



Features

- 34kg (75lb) static load capacity
 - Six-way dimensional adjustment clip device
 - Elongated holes for depth adjustment
 - Motion synchronization stabilizer
- Description
- Concealed drawer runners with push-open mechanism
 - Suited for both frameless and face frame cabinets
 - Offered in lengths spanning from 305mm (12") to 533mm (21")
 - Compatible with material thicknesses from 13mm (1/2") to 16mm (5/8")
 - Facilitates effortless opening of drawers via the push latch mechanism with a gentle touch on the drawer front
 - Recommended for drawer widths ranging from 610mm (24") to 1220mm (48")
 - Durable runners ensure consistently smooth and controlled drawer glide

Applications



Rear mounting brackets



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
381mm (15")	305mm (12")	TCH-23302.S 16.305.3D
457mm (18")	381mm (15")	TCH-23302.S 16.381.3D
533mm (21")	457mm (18")	TCH-23302.S 16.457.3D
610mm (24")	533mm (21")	TCH-23302.S 16.533.3D

Runner set and components



Drawer and Cabinet Specifications



Drawer box specification

Rear view

Drawer back preparation

Rear view

TCH - 23000 R.P.01 Rear mounting

Front view

TCH - 23000 R.S.01 Rear mounting

Front view

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23302.S 16.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	257mm (10-1/8")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23302.S 16.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23302.S 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23302.S 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")



CLIP-ON PUSH-OPEN SYNCHRONIZED UNDERMOUNT

TCH-23302.S - 19MM



Features

- 34kg (75lb) static load capacity
 - Six-way dimensional adjustment clip device
 - Elongated holes for depth adjustment
 - Motion synchronization stabilizer
- Description
- Concealed drawer runners with push-open mechanism
 - Suited for both frameless and face frame cabinets
 - Offered in lengths spanning from 305mm (12") to 533mm (21")
 - Compatible with material thicknesses from 13mm (1/2") to 16mm (5/8")
 - Facilitates effortless opening of drawers via the push latch mechanism with a gentle touch on the drawer front
 - Recommended for drawer widths ranging from 610mm (24") to 1220mm (48")
 - Durable runners ensure consistently smooth and controlled drawer glide

Applications



Rear mounting brackets



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
381mm (15")	305mm (12")	TCH-23302.S 19.305.3D
457mm (18")	381mm (15")	TCH-23302.S 19.381.3D
533mm (21")	457mm (18")	TCH-23302.S 19.457.3D
610mm (24")	533mm (21")	TCH-23302.S 19.533.3D

Runner set and components



Drawer and Cabinet Specifications



Drawer box specification

Rear view

Drawer back preparation

Rear view

TCH - 23000 R.P.01 Rear mounting

Front view

TCH - 23000 R.S.01 Rear mounting

Front view

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Note: Use a minimum of three screws per bracket

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23302.S 19.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	257mm (10-1/8")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23302.S 19.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23302.S 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23302.S 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")



CLIP-ON SOFT CLOSE UNDERMOUNT SLIDES

TCH-23303 - 16MM



Features

- 34kg (75lb) static load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with push-open functionality
- Well-suited for frameless and blocked-out face frame cabinets
- Lengths available from 457mm (18") to 610mm (24")
- Compatible with material thicknesses ranging from 13mm (1/2") to 16mm (5/8")
- Enables effortless opening of the drawer via the push latch mechanism with a gentle touch on the drawer front
- Streamlined concealed design facilitates effortless installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23303 16.457.3D
610mm (24")	533mm (21")	TCH-23303 16.533.3D
686mm (27")	610mm (24")	TCH-23303 16.610.3D

Runner set and components



TCH-23000 CL.3D



TCH-23303 - 16mm



Drawer and Cabinet Specifications

Drawer box specification

Front view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23303 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23303 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23303 16.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")



CLIP-ON PUSH-OPEN UNDERMOUNT

TCH-23303 - 19MM



Features

- 34kg (75lb) static load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with push-open functionality
- Well-suited for frameless and blocked-out face frame cabinets
- Lengths available from 457mm (18") to 610mm (24")
- Compatible with material thicknesses ranging from 16mm (5/8") to 19mm (3/4")
- Enables effortless opening of the drawer via the push latch mechanism with a gentle touch on the drawer front
- Streamlined concealed design facilitates effortless installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



PAGE 74

Slim Box



PAGE 84-89

Inner Drawer



PAGE 90-95

Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23303 19.457.3D
610mm (24")	533mm (21")	TCH-23303 19.533.3D
686mm (27")	610mm (24")	TCH-23303 19.610.3D

Runner set and components



TCH-23000 CL.3D




TCH-23303 - 19mm

Drawer and Cabinet Specifications




Drawer box specification

Front view

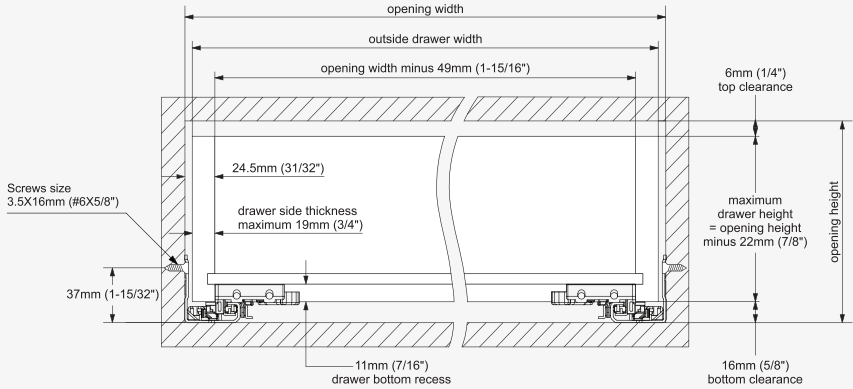

Drawer back preparation

Rear view




Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally

Calculating outside drawer width

For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Runner mounting specifications

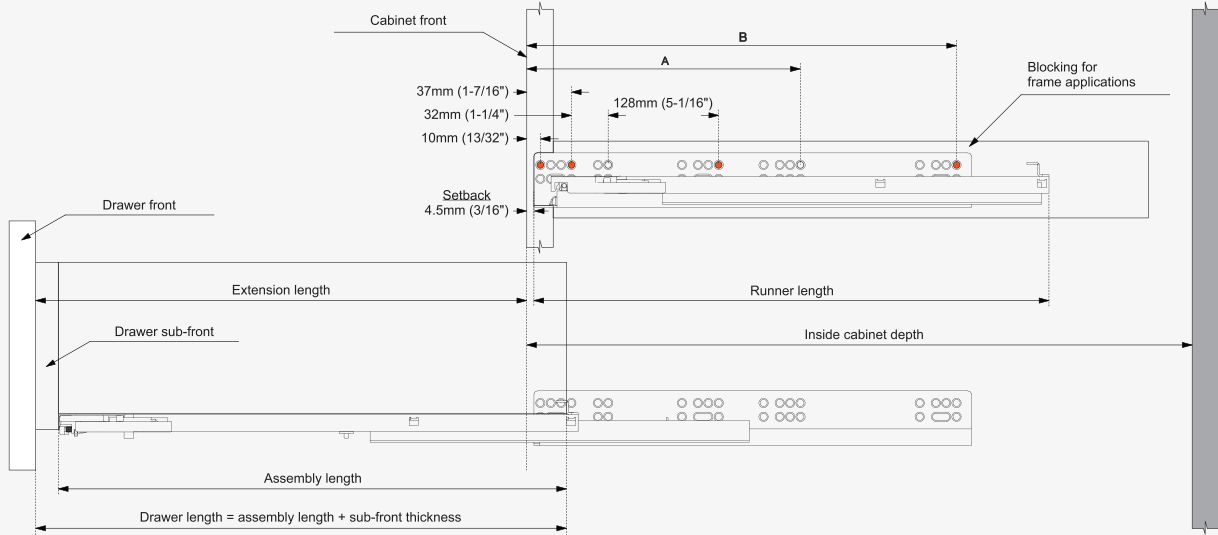

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23303 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23303 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23303 19.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")



CLIP-ON PUSH-OPEN SYNCHRONIZED UNDERMOUNT

TCH-23303.S - 16MM



Features

- 34kg (75lb) static load capacity
 - Six-way dimensional adjustment clip device
 - Elongated holes for depth adjustment
 - Motion synchronization stabilizer
- Description
- Concealed drawer runners with push-open mechanism
 - Perfectly suited for frameless and blocked-out face frame cabinets
 - Offered in lengths from 457mm (18") to 610mm (24")
 - Designed for material thicknesses ranging from 13mm (1/2") to 16mm (5/8")
 - Facilitates effortless opening of the drawer through a gentle touch on the front
 - Recommended for drawer widths spanning from 610mm (24") to 1220mm (48")
 - Durable runners ensure consistently smooth and controlled drawer glide

Applications



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23303.S 16.457.3D
610mm (24")	533mm (21")	TCH-23303.S 16.533.3D
686mm (27")	610mm (24")	TCH-23303.S 16.610.3D

Runner set and components



Drawer and Cabinet Specifications



Drawer box specification

Rear view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23303.S 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23303.S 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23303.S 16.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")



CLIP-ON PUSH-OPEN SYNCHRONIZED UNDERMOUNT

TCH-23303.S - 19MM



Features

- 34kg (75lb) static load capacity
 - Six-way dimensional adjustment clip device
 - Elongated holes for depth adjustment
 - Motion synchronization stabilizer
- Description
- Concealed drawer runners with push-open mechanism
 - Perfectly suited for frameless and blocked-out face frame cabinets
 - Offered in lengths from 457mm (18") to 610mm (24")
 - Designed for material thicknesses ranging from 16mm (5/8") to 19mm (3/4")
 - Facilitates effortless opening of the drawer through a gentle touch on the front
 - Recommended for drawer widths spanning from 610mm (24") to 1220mm (48")
 - Durable runners ensure consistently smooth and controlled drawer glide

Applications



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23303.S 19.457.3D
610mm (24")	533mm (21")	TCH-23303.S 19.533.3D
686mm (27")	610mm (24")	TCH-23303.S 19.610.3D

Runner set and components



Drawer and Cabinet Specifications



Drawer box specification

Rear view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23303.S 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23303.S 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23303.S 19.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")



TCH-23304 - 16MM



- 34kg (75lb) static load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with push-open functionality
- Suited for frameless and face frame cabinets
- Offered in lengths from 229mm (9") to 610mm (24")
- Compatible with material thicknesses ranging from 13mm (1/2") to 16mm (5/8")
- Facilitates effortless opening of the push latch mechanism drawer with a gentle touch on the drawer front
- Streamlined concealed design ensures easy installation
- Durable runners provide consistently smooth and controlled drawer glide

Applications

Standard Applications



Slim Box



Inner Drawer



Rear mounting brackets



Cabinet and runner comparison


Overall cabinet depth	Drawer length	Runner SKU number
305mm (12")	229mm (9")	TCH-23304 16.229.3D
381mm (15")	305mm (12")	TCH-23304 16.305.3D
457mm (18")	381mm (15")	TCH-23304 16.381.3D
533mm (21")	457mm (18")	TCH-23304 16.457.3D
610mm (24")	533mm (21")	TCH-23304 16.533.3D
686mm (27")	610mm (24")	TCH-23304 16.610.3D

Runner set and components



Drawer box specification

Front view

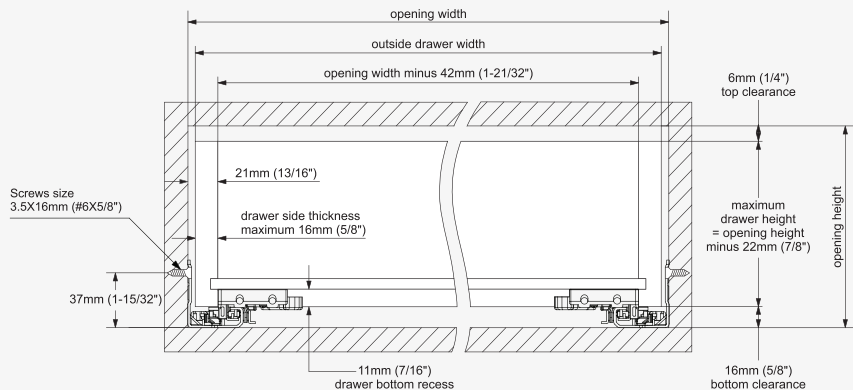

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.


Drawer back preparation

Rear view




TCH - 23000 R.P.01 Rear mounting

Front view




TCH - 23000 R.S.01 Rear mounting

Front view



Note:
Use a minimum
of three screws
per bracket

Runner mounting specifications

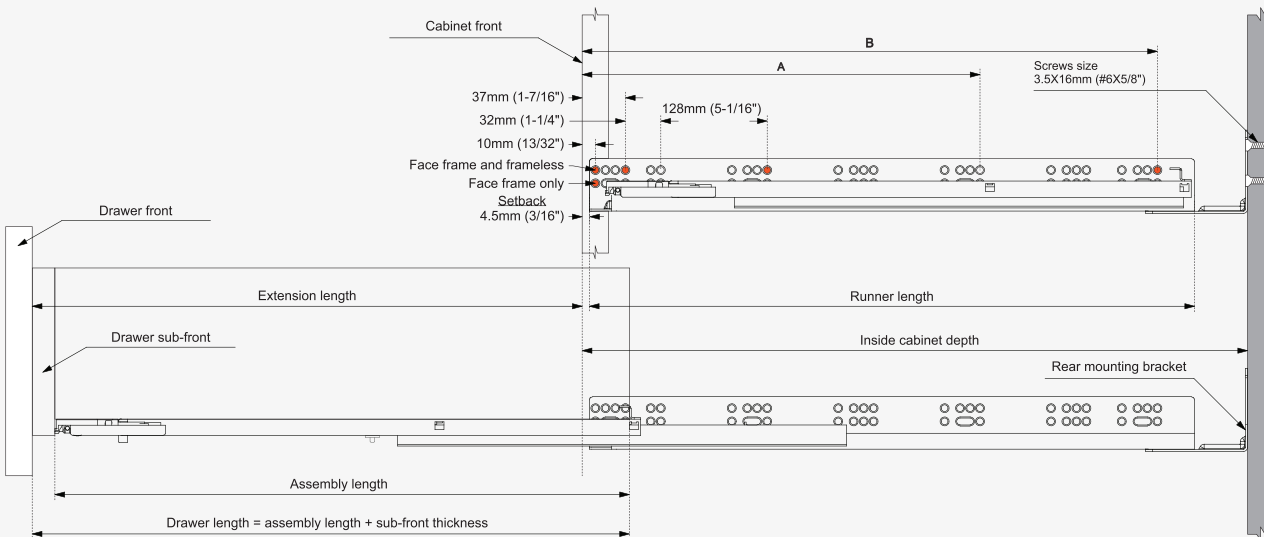

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23304 16.229.3D	229mm (9")	242mm (9-1/2")	213mm (8-3/8")	140mm (5-1/2")	-	229mm (9-1/32")	267mm (10 1/2")	292mm (11 1/2")
TCH-23304 16.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	257mm (10-1/8")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23304 16.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23304 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23304 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")
TCH-23304 16.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	357mm (14-1/16")	581mm (22-7/8")	648mm (25 1/2")	673mm (26 1/2")





CLIP-ON PUSH-OPEN UNDERMOUNT

TCH-23304 - 19MM



Features

- 34kg (75lb) static load capacity
 - Six-way dimensional adjustment clip device
 - Elongated holes for depth adjustment
- Description**
- Concealed drawer runners with push-open functionality
 - Suited for frameless and face frame cabinets
 - Offered in lengths from 229mm (9") to 610mm (24")
 - Compatible with material thicknesses ranging from 16mm (5/8") to 19mm (3/4")
 - Facilitates effortless opening of the push latch mechanism drawer with a gentle touch on the drawer front
 - Streamlined concealed design ensures easy installation
 - Durable runners provide consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



Slim Box



Inner Drawer



Rear mounting brackets



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
305mm (12")	229mm (9")	TCH-23304 19.229.3D
381mm (15")	305mm (12")	TCH-23304 19.305.3D
457mm (18")	381mm (15")	TCH-23304 19.381.3D
533mm (21")	457mm (18")	TCH-23304 19.457.3D
610mm (24")	533mm (21")	TCH-23304 19.533.3D
686mm (27")	610mm (24")	TCH-23304 19.610.3D

Runner set and components




Drawer and Cabinet Specifications




Drawer box specification

Front view

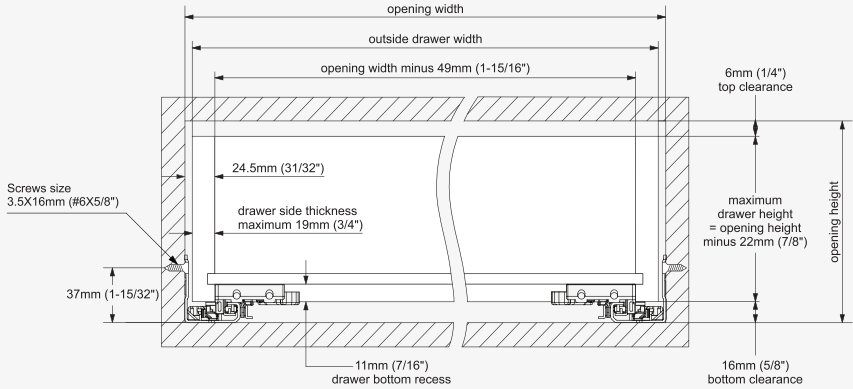


Drawer back preparation

Rear view




TCH - 23000 R.P.01 Rear mounting

Front view



TCH - 23000 R.S.01 Rear mounting

Front view



Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Note: Use a minimum of three screws per bracket

Runner mounting specifications

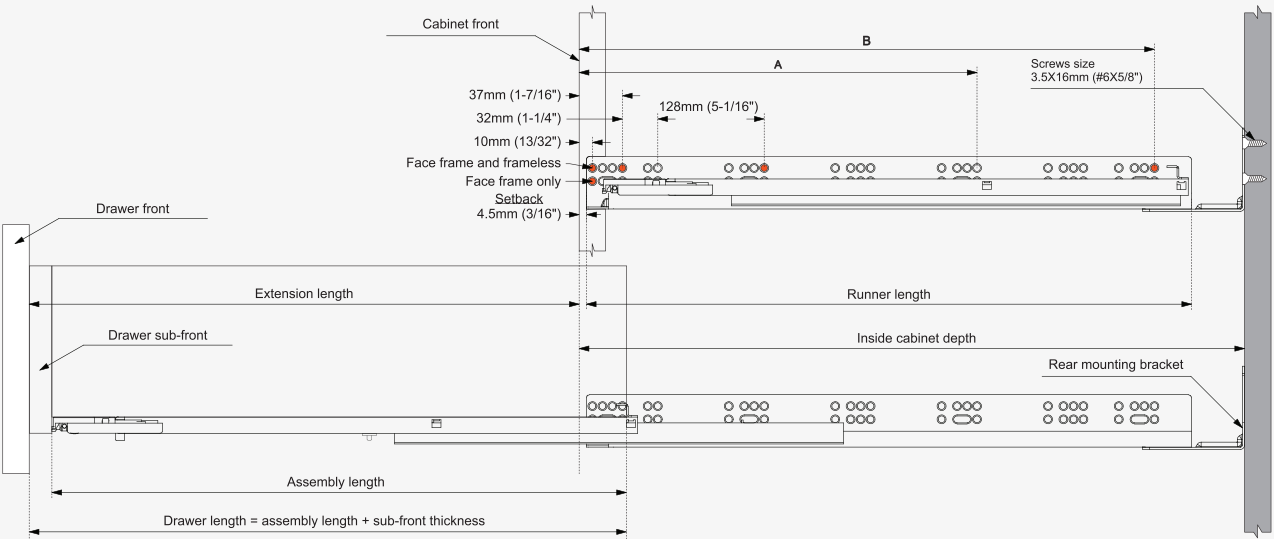

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B		
TCH-23304 19.229.3D	229mm (9")	242mm (9-1/2")	213mm (8-3/8")	140mm (5-1/2")	-	229mm (9-1/32")	267mm (10 1/2")	292mm (11 1/2")
TCH-23304 19.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	257mm (10-1/8")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23304 19.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23304 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23304 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")
TCH-23304 19.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	357mm (14-1/16")	581mm (22-7/8")	648mm (25 1/2")	673mm (26 1/2")



CLIP-ON PUSH-OPEN SYNCHRONIZED UNDERMOUNT

TCH-23304.S - 16MM



Features

- 34kg (75lb) static load capacity
 - Six-way dimensional adjustment clip device
 - Elongated holes for depth adjustment
 - Motion synchronization stabilizer
- Description
- Concealed drawer runners with push-open mechanism
 - Suited for both frameless and face frame cabinets
 - Offered in lengths spanning from 305mm (12") to 533mm (21")
 - Compatible with material thicknesses from 13mm (1/2") to 16mm (5/8")
 - Facilitates effortless opening of drawers via the push latch mechanism with a gentle touch on the drawer front
 - Recommended for drawer widths ranging from 610mm (24") to 1220mm (48")
 - Durable runners ensure consistently smooth and controlled drawer glide

Applications



Rear mounting brackets



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
381mm (15")	305mm (12")	TCH-23304.S 16.305.3D
457mm (18")	381mm (15")	TCH-23304.S 16.381.3D
533mm (21")	457mm (18")	TCH-23304.S 16.457.3D
610mm (24")	533mm (21")	TCH-23304.S 16.533.3D

Runner set and components



Drawer and Cabinet Specifications



Drawer box specification

Rear view

Drawer back preparation

Rear view

TCH - 23000 R.P.01 Rear mounting

Front view

TCH - 23000 R.S.01 Rear mounting

Front view

Calculating outside drawer width

For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23304.S 16.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	257mm (10-1/8")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23304.S 16.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23304.S 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23304.S 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")



CLIP-ON PUSH-OPEN SYNCHRONIZED UNDERMOUNT

TCH-23304.S - 19MM



Features

- 34kg (75lb) static load capacity
 - Six-way dimensional adjustment clip device
 - Elongated holes for depth adjustment
 - Motion synchronization stabilizer
- Description
- Concealed drawer runners with push-open mechanism
 - Suited for both frameless and face frame cabinets
 - Offered in lengths spanning from 305mm (12") to 533mm (21")
 - Compatible with material thicknesses from 16mm (5/8") to 19mm (3/4")
 - Facilitates effortless opening of drawers via the push latch mechanism with a gentle touch on the drawer front
 - Recommended for drawer widths ranging from 610mm (24") to 1220mm (48")
 - Durable runners ensure consistently smooth and controlled drawer glide

Applications



Rear mounting brackets



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
381mm (15")	305mm (12")	TCH-23304.S 19.305.3D
457mm (18")	381mm (15")	TCH-23304.S 19.381.3D
533mm (21")	457mm (18")	TCH-23304.S 19.457.3D
610mm (24")	533mm (21")	TCH-23304.S 19.533.3D

Runner set and components



Drawer and Cabinet Specifications



Drawer box specification

Rear view

Drawer back preparation

Rear view

TCH - 23000 R.P.01 Rear mounting

Front view

TCH - 23000 R.S.01 Rear mounting

Front view

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23304.S 19.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	257mm (10-1/8")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23304.S 19.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23304.S 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23304.S 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")



CLIP-ON PUSH-OPEN STANDARD DUTY UNDERMOUNT

TCH-23305 - 16MM



Features

- 50kg (110lb) static load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with push-open functionality
- Designed for frameless and blocked-out face frame cabinets
- Offered in lengths from 381mm (15") to 610mm (24")
- Suitable for material thicknesses ranging from 13mm (1/2") to 16mm (5/8")
- Enables easy opening of the drawer with a gentle touch on the front
- Streamlined concealed design for effortless installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



PAGE 74

Slim Box



PAGE 84-89

Inner Drawer



PAGE 90-95

Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
457mm (18")	381mm (15")	TCH-23305 16.381.3D
533mm (21")	457mm (18")	TCH-23305 16.457.3D
610mm (24")	533mm (21")	TCH-23305 16.533.3D
686mm (27")	610mm (24")	TCH-23305 16.610.3D

Runner set and components



TCH-233000 T-CL.3D




TCH-23305 - 16mm

Drawer and Cabinet Specifications



Drawer box specification

Front view

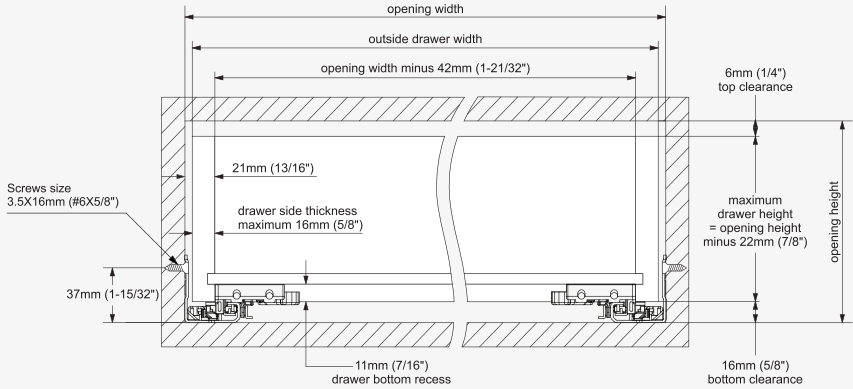

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")


Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Drawer back preparation

Rear view



Runner mounting specifications

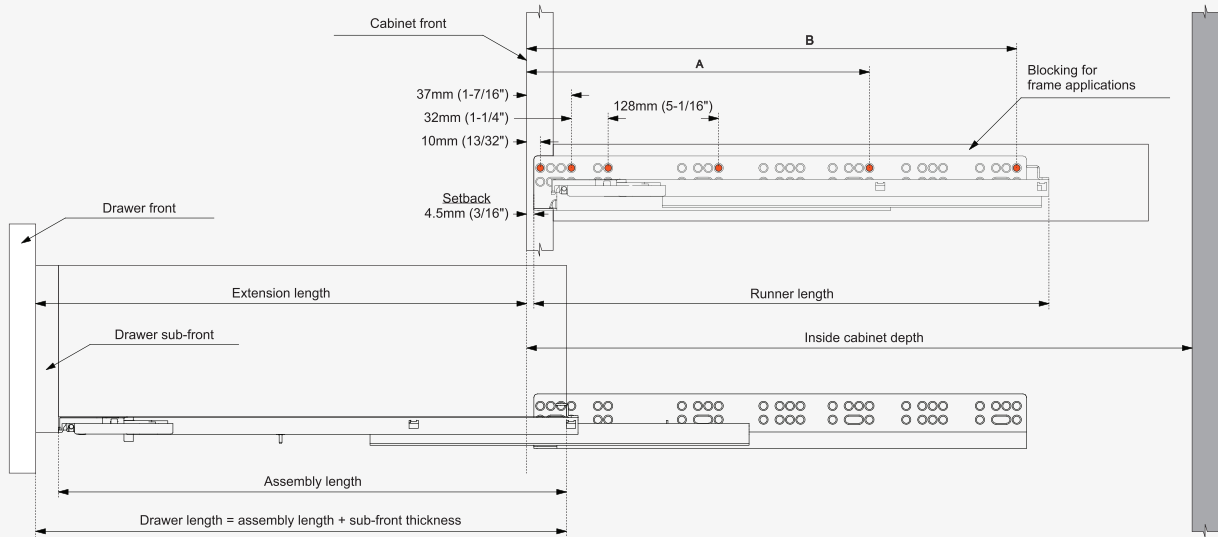

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23305 16.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")
TCH-23305 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	421mm (16-9/16")	495mm (19 1/2")
TCH-23305 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")
TCH-23305 16.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	357mm (14-1/16")	549mm (21-5/8")	648mm (25 1/2")



CLIP-ON PUSH-OPEN STANDARD DUTY UNDERMOUNT

TCH-23305 - 19MM



Features

- 50kg (110lb) static load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with push-open functionality
- Designed for frameless and blocked-out face frame cabinets
- Offered in lengths from 381mm (15") to 610mm (24")
- Suitable for material thicknesses ranging from 16mm (5/8") to 19mm (3/4")
- Enables easy opening of the drawer with a gentle touch on the front
- Streamlined concealed design for effortless installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



PAGE 74

Slim Box



PAGE 84-89

Inner Drawer



PAGE 90-95

Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
457mm (18")	381mm (15")	TCH-23305 19.381.3D
533mm (21")	457mm (18")	TCH-23305 19.457.3D
610mm (24")	533mm (21")	TCH-23305 19.533.3D
686mm (27")	610mm (24")	TCH-23305 19.610.3D

Runner set and components



TCH-23000 T-CL.3D




TCH-23305 - 19mm

Drawer and Cabinet Specifications



Drawer box specification

Front view

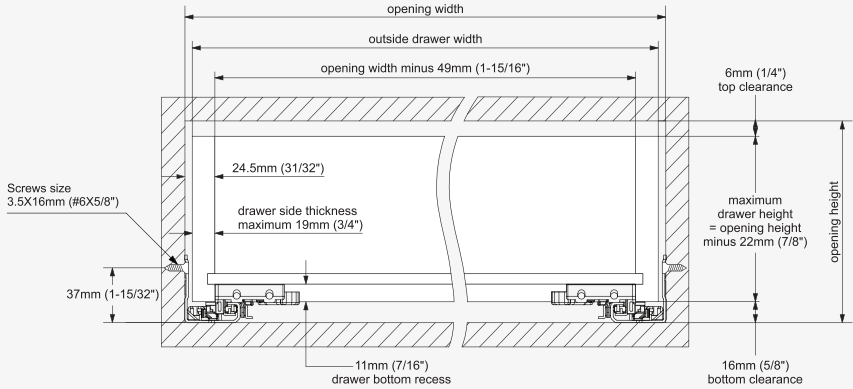

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")


Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Drawer back preparation

Rear view



Runner mounting specifications

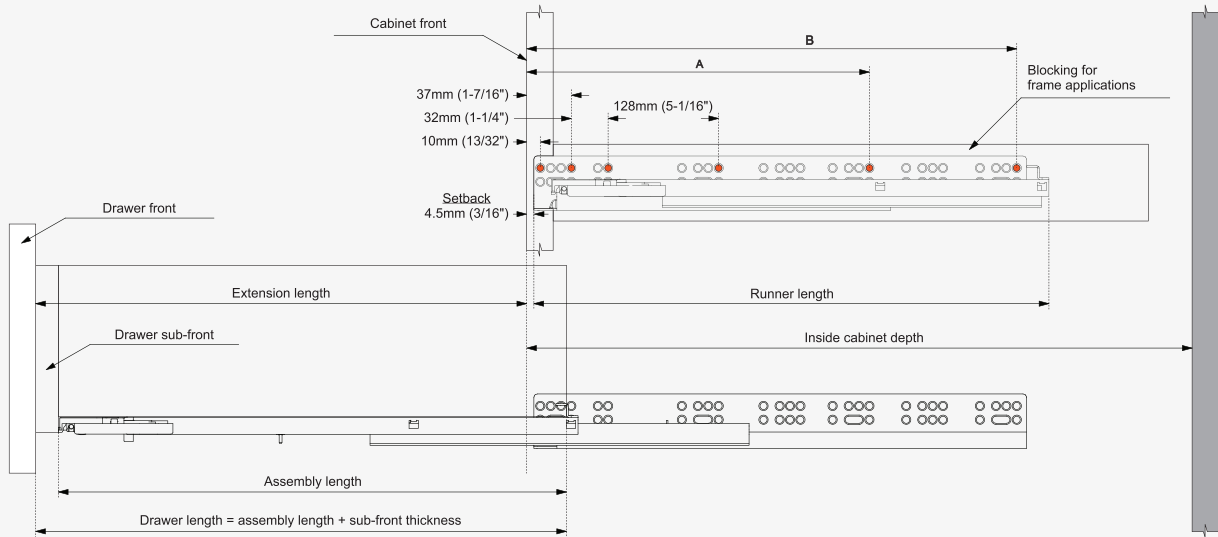


Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23305 19.457.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")
TCH-23305 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	421mm (16-9/16")	495mm (19 1/2")
TCH-23305 19.457.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")
TCH-23305 19.457.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	357mm (14-1/16")	549mm (21-5/8")	648mm (25 1/2")

PUSH
OPEN

PUSH-OPEN SOFT-CLOSE UNDERMOUNT SLIDES

Experience the ideal blend of convenience and quiet elegance with our Push-Open Soft-Close Undermount Slides. A gentle push effortlessly opens your drawer, while the soft-close feature ensures it glides back quietly into place. These slides add modern sophistication and enhanced functionality to your cabinetry.

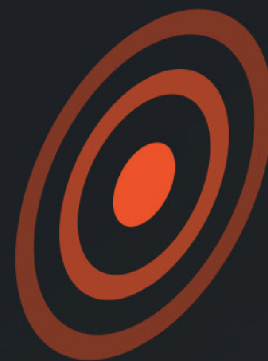

KEY FEATURES

Durable Construction
Push-Open Mechanism
Soft-Close Functionality
Designed For Quick and Straightforward Installation
Suitable For Both Frameless and Face Frame Cabinets

SOFT
CLOSE



CLIP-ON PUSH-OPEN SOFT CLOSE UNDERMOUNT

TCH-23403 - 16MM



Features

- 34kg (75lb) static load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with Push-open and Soft-close functionality
- Ideal for frameless and blocked-out face frame cabinets
- Offered in lengths ranging from 457mm (18") to 610mm (24")
- Compatible with material thicknesses from 13mm (1/2") to 16mm (5/8")
- Allows the push latch mechanism drawer to open effortlessly with a gentle touch on the drawer front, while also integrating a soft-close feature for quiet closing
- Streamlined concealed design facilitates easy installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications

Standard Applications



Inset Drawer



Slim Box



Inner Drawer



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23403 16.457.3D
610mm (24")	533mm (21")	TCH-23403 16.533.3D
686mm (27")	610mm (24")	TCH-23403 16.610.3D

Runner set and components



TCH-23000 CL.3D



TCH-23403 - 16mm

Drawer and Cabinet Specifications



Drawer box specification

Front view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23403 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23403 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23403 16.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")



CLIP-ON PUSH-OPEN SOFT CLOSE UNDERMOUNT

TCH-23403 - 19MM



Features

- 34kg (75lb) static load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with Push-open and Soft-close functionality
- Ideal for frameless and blocked-out face frame cabinets
- Offered in lengths ranging from 457mm (18") to 610mm (24")
- Compatible with material thicknesses from 16mm (5/8") to 19mm (3/4")
- Allows the push latch mechanism drawer to open effortlessly with a gentle touch on the drawer front, while also integrating a soft-close feature for quiet closing
- Streamlined concealed design facilitates easy installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23403 19.457.3D
610mm (24")	533mm (21")	TCH-23403 19.533.3D
686mm (27")	610mm (24")	TCH-23403 19.610.3D

Runner set and components



TCH-23000 CL.3D



TCH-23403 - 19mm



Drawer and Cabinet Specifications

Drawer box specification

Front view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23403 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23403 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23403 19.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")



CLIP-ON PUSH-OPEN SOFT CLOSE UNDERMOUNT

TCH-23404 - 16MM



Features

- 34kg (75lb) static load capacity
 - Six-way dimensional adjustment clip device
 - Elongated holes for depth adjustment
- Description**
- Concealed drawer runners with Push-open and Soft-close features
 - Ideal for both frameless and face frame cabinets
 - Offered in lengths ranging from 305mm (12") to 533mm (21")
 - Suitable for material thicknesses from 13mm (1/2") to 16mm (5/8")
 - Allows the push latch mechanism drawer to open effortlessly with a gentle touch on the drawer front, while also offering a soft-close feature for quiet closing
 - Streamlined concealed design facilitates easy installation
 - Durable runners guarantee consistently smooth and controlled drawer glide

Applications



Rear mounting brackets



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
381mm (15")	305mm (12")	TCH-23404 16.305.3D
457mm (18")	381mm (15")	TCH-23404 16.381.3D
533mm (21")	457mm (18")	TCH-23404 16.457.3D
610mm (24")	533mm (21")	TCH-23404 16.533.3D

Runner set and components



Drawer and Cabinet Specifications

Drawer box specification

Front view

Drawer back preparation

Rear view

Note: The inside drawer width must equal Cabinet opening width minus 42mm (1-21/32") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	16mm (5/8")	15mm (19/32")	14mm (9/16")	13mm (1/2")	12mm (15/32")
Deduct from inside cabinet width	10mm (3/8")	12mm (15/32")	14mm (9/16")	16mm (5/8")	18mm (23/32")

Example: For 508mm (20") inside cabinet width and a 16mm (5/8") thick drawer panel, 508mm (20") minus 10mm (3/8") = 498mm (19 5/8") drawer width.

TCH - 23000 R.P.01 Rear mounting

Front view

TCH - 23000 R.S.01 Rear mounting

Front view

Note: Use a minimum of three screws per bracket

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23404 16.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	257mm (10-1/8")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23404 16.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23404 16.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23404 16.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")



CLIP-ON PUSH-OPEN SOFT CLOSE UNDERMOUNT

TCH-23404 - 19MM



Features

- 34kg (75lb) static load capacity
 - Six-way dimensional adjustment clip device
 - Elongated holes for depth adjustment
- Description**
- Concealed drawer runners with Push-open and Soft-close features
 - Ideal for both frameless and face frame cabinets
 - Offered in lengths ranging from 305mm (12") to 533mm (21")
 - Suitable for material thicknesses from 16mm (5/8") to 19mm (3/4")
 - Allows the push latch mechanism drawer to open effortlessly with a gentle touch on the drawer front, while also offering a soft-close feature for quiet closing
 - Streamlined concealed design facilitates easy installation
 - Durable runners guarantee consistently smooth and controlled drawer glide

Applications



Rear mounting brackets



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
381mm (15")	305mm (12")	TCH-23404 19.305.3D
457mm (18")	381mm (15")	TCH-23404 19.381.3D
533mm (21")	457mm (18")	TCH-23404 19.457.3D
610mm (24")	533mm (21")	TCH-23404 19.533.3D

Runner set and components



Drawer and Cabinet Specifications

Drawer box specification

Front view

Drawer back preparation

Rear view

TCH - 23000 R.P.01 Rear mounting

Front view

TCH - 23000 R.S.01 Rear mounting

Front view

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally

Calculating outside drawer width					
For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")

Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Runner mounting specifications

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth with rear attachment	
					A	B	Minimum	Maximum
TCH-23404 19.305.3D	305mm (12")	318mm (12-1/2")	289mm (11-3/8")	257mm (10-1/8")	-	261mm (10-9/32")	343mm (13 1/2")	368mm (14 1/2")
TCH-23404 19.381.3D	381mm (15")	394mm (15-1/2")	365mm (14-3/8")	343mm (13-1/2")	261mm (10-9/32")	357mm (14-1/16")	419mm (16 1/2")	445mm (17 1/2")
TCH-23404 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	357mm (14-1/16")	453mm (17-27/32")	495mm (19 1/2")	521mm (20 1/2")
TCH-23404 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	357mm (14-1/16")	517mm (20-11/32")	572mm (22 1/2")	597mm (23 1/2")




Inset Drawer Setback Specifications




Description

- An increased setback of the runner is required.
- For face frame applications, blocking-out is required behind the face frame.

Complete block-out

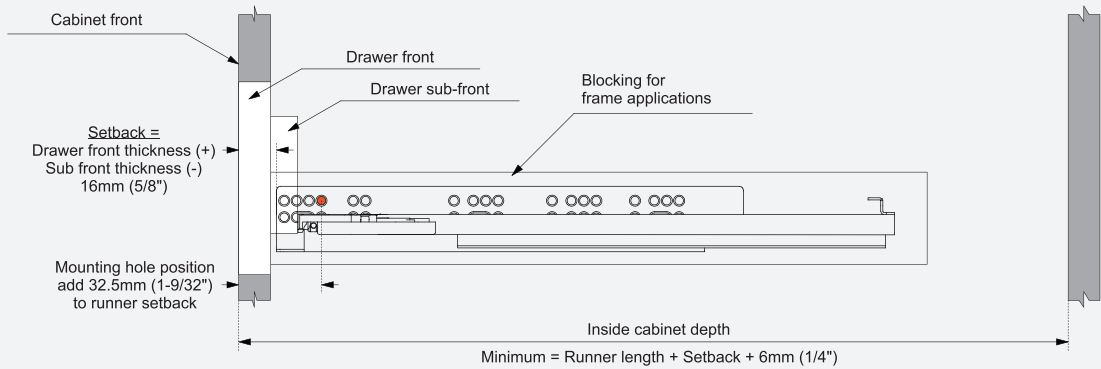


Partial block-out

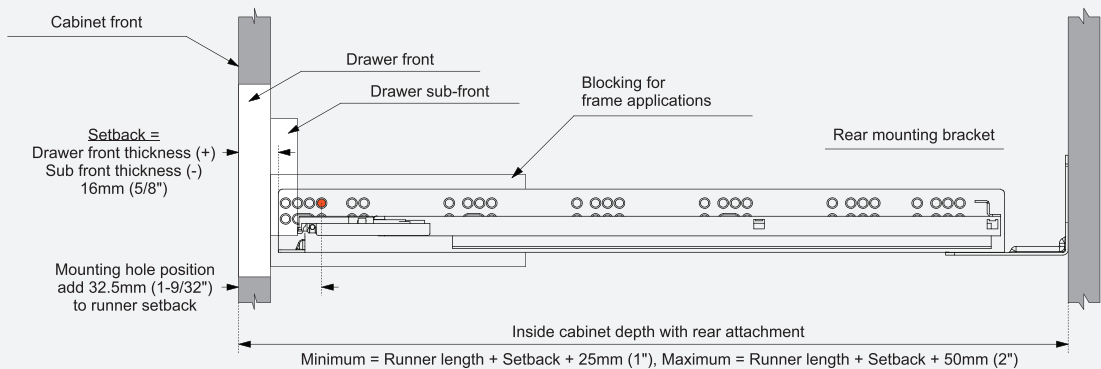

Synchronized System Installation

Attaching undermount slides to the cabinet


Install the runners inside the cabinet based on the provided information for the selected undermount slides.

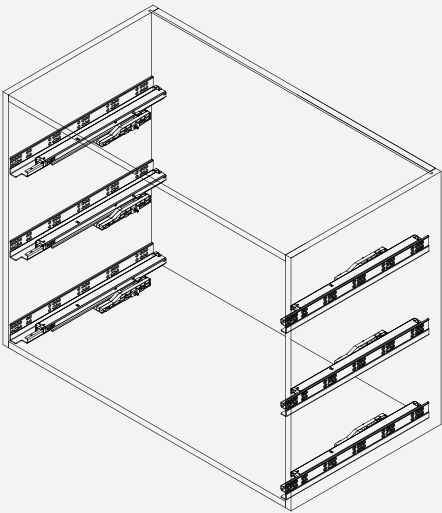


Linkage rod length

Measure the width of the cabinet opening to determine the length of the linkage rod. Use the calculation table below to calculate the appropriate length, and then cut the rod accordingly.

Face frame cabinet




Frameless cabinet




Linkage rod cutting length

Runners thickness	Cutting calculation
16mm (5/8")	Opening width minus 151mm (5-15/16")
19mm (3/4")	Opening width minus 158mm (6-7/32")

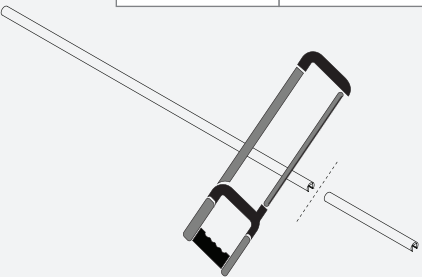


Attaching the linkage rod to the drawer runners


Insert the sockets into the linkage rod, attach the linkage rod to the left and right pinions, and then secure the sockets with the push mechanism.

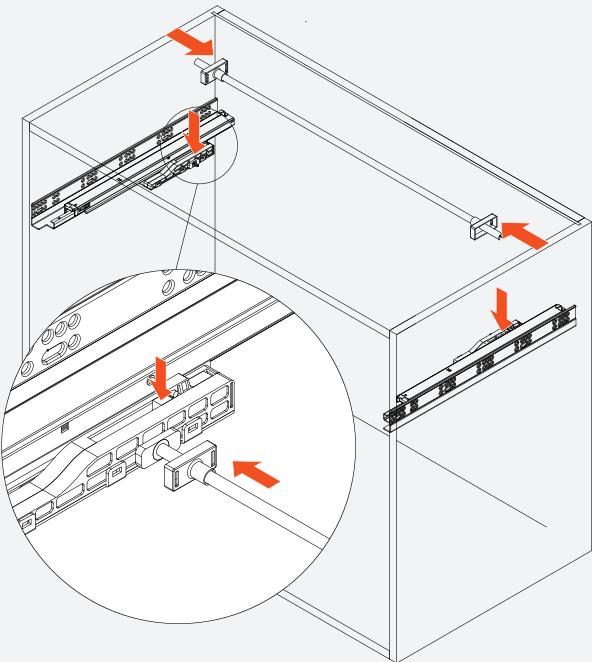

Insert drawers

Fully extend the slides. Position the drawer on the slides and close it. The locking devices will automatically engage with the slides. Make adjustments if necessary.

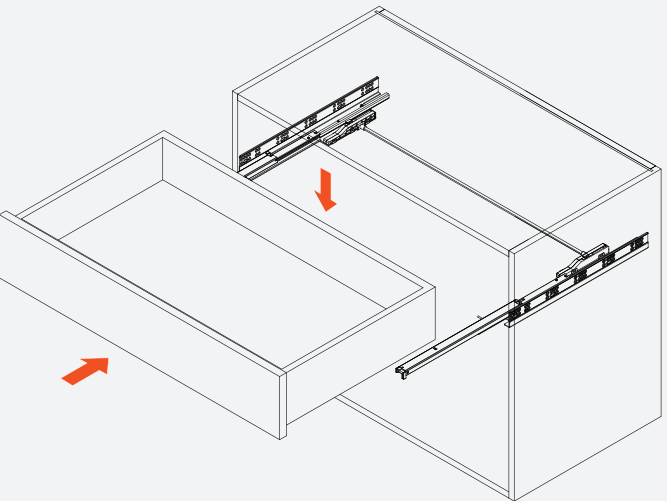

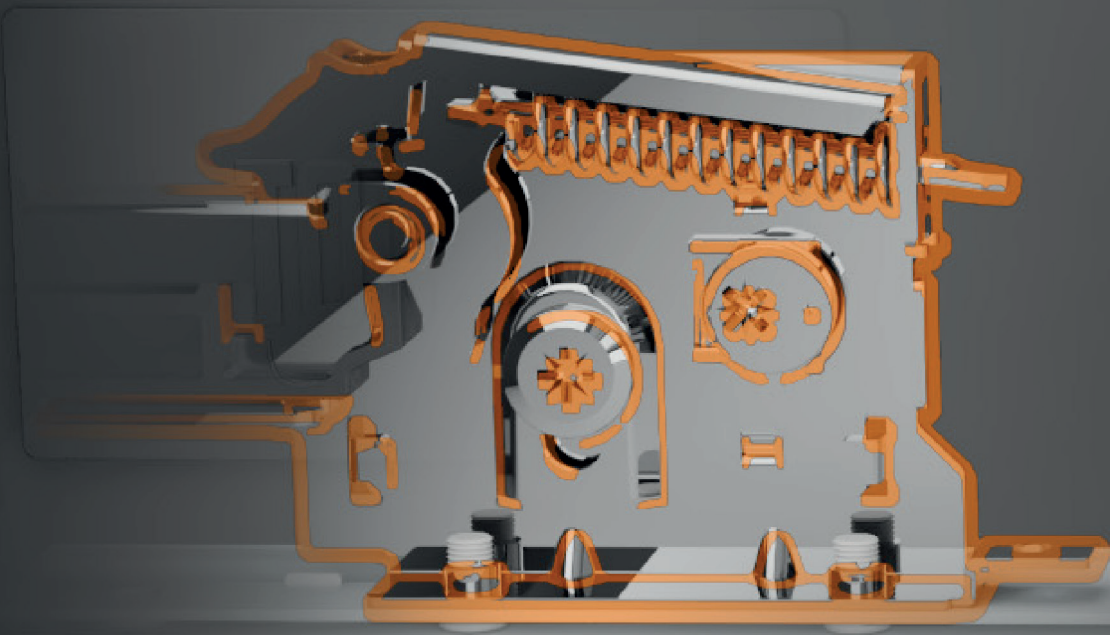

METAL DRAWER SYSTEMS

Upgrade your cabinetry with our Metal Drawer System—designed for durability, sleek aesthetics, and maximum storage efficiency. This system offers a modern, streamlined look while providing robust support and smooth operation. Perfect for kitchens, bathrooms, and office furniture, it's the ideal choice for those who value both style and functionality in their drawer designs.

KEY FEATUERS

- Sleek Aesthetic
- Space-Saving Design
- Durable Construction
- Customizable Options
- Versatile Compatibility





TOUCH Slim Metal Drawer Sideboard LVL-1

TCH-25201




Features

- 89mm (3-1/2") Height
- Tilt adjustment
- Fully compatible with all our undermount slide options

Description

- A slim profile adds a modern touch to your cabinetry
- Low-height design optimizes usable cabinet space
- Constructed from high-quality metal, ensuring strength and stability for everyday use
- Customizable and adaptable, perfect for standard applications or as an inner drawer
- Offered in lengths ranging from 305mm (12") to 533mm (21")
- Standard color: Dark Gray
- Optional colors: Light Gray and White available upon request


Applications



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Sideboard SKU number
381mm (15")	305mm (12")	TCH-TCH-25201 305
457mm (18")	381mm (15")	TCH-TCH-25201 381
533mm (21")	457mm (18")	TCH-TCH-25201 457
610mm (24")	533mm (21")	TCH-TCH-25201 533

Inner drawer front & mounting brackets

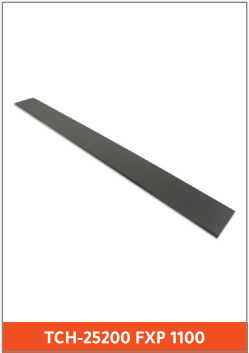

Side rails



Sideboard set and components



Drawer and Cabinet Specifications



Drawer box specifications

Front view

Backboard cutting width	
Runners thickness	Cutting calculation
16mm (5/8")	Opening width minus 42mm (1-21/32")
19mm (3/4")	Opening width minus 49mm (1-15/16")

Bottom board cutting width	
Runners thickness	Cutting calculation
16mm (5/8")	Opening width minus 21mm (27/32")
19mm (3/4")	Opening width minus 28mm (1-3/32")

Bottom board length = drawer length minus 10mm (3/8")

Level 1 installation specifications

Internal installation height

Front panel installation dimensions

Rear panel installation dimensions

Level 1 with side rails installation specifications

Internal installation height

Front panel installation dimensions

Rear panel installation dimensions

Runner mounting specifications



TOUCH Slim Metal Drawer Sideboard LVL-2

TCH-25202



- Features**
- 128mm (5-1/32") Height
 - Tilt adjustment
 - Fully compatible with all our undermount slide options
- Description**
- A slim profile adds a modern touch to your cabinetry
 - Medium-height design provides an ideal balance between storage capacity and sleek aesthetics
 - Constructed from high-quality metal, ensuring strength and stability for everyday use
 - Customizable and adaptable, perfect for standard applications or as an inner drawer
 - Offered in lengths ranging from 305mm (12") to 533mm (21")
 - Standard color: Dark Gray
 - Optional colors: Light Gray and White available upon request

Applications



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Sideboard SKU number
381mm (15")	305mm (12")	TCH-TCH-25202 305
457mm (18")	381mm (15")	TCH-TCH-25202 381
533mm (21")	457mm (18")	TCH-TCH-25202 457
610mm (24")	533mm (21")	TCH-TCH-25202 533

Inner drawer front & mounting brackets



TCH-25200 FXP 1100



TCH-25200 FXB 128

Side rails



TCH-25200 SSR

Sideboard set and components



TCH-25202

Drawer and Cabinet Specifications



Drawer box specifications

Front view

Backboard cutting width	
Runners thickness	Cutting calculation
16mm (5/8")	Opening width minus 42mm (1-21/32")
19mm (3/4")	Opening width minus 49mm (1-15/16")

Bottom board cutting width	
Runners thickness	Cutting calculation
16mm (5/8")	Opening width minus 21mm (27/32")
19mm (3/4")	Opening width minus 28mm (1-3/32")

Bottom board length = drawer length minus 10mm (3/8")

Level 2 installation specifications

Internal installation height

Front panel installation dimensions

Rear panel installation dimensions

Runner mounting specifications



TOUCH Slim Metal Drawer Sideboard LVL-3

TCH-25203



Features

- 175mm (6-7/8") Height
- Tilt adjustment
- Fully compatible with all our undermount slide options

Description

- A slim profile adds a modern touch to your cabinetry
- Large-height design maximizes storage capacity, ideal for accommodating bulkier items
- Constructed from high-quality metal, ensuring strength and stability for everyday use
- Customizable and adaptable, perfect for standard applications or as an inner drawer
- Offered in lengths ranging from 305mm (12") to 533mm (21")
- Standard color: Dark Gray
- Optional colors: Light Gray and White available upon request


Applications



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Sideboard SKU number
381mm (15")	305mm (12")	TCH-TCH-25203 305
457mm (18")	381mm (15")	TCH-TCH-25203 381
533mm (21")	457mm (18")	TCH-TCH-25203 457
610mm (24")	533mm (21")	TCH-TCH-25203 533

Inner drawer front & mounting brackets

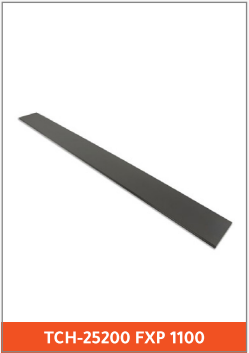


Side rails




Sideboard set and components



Drawer and Cabinet Specifications

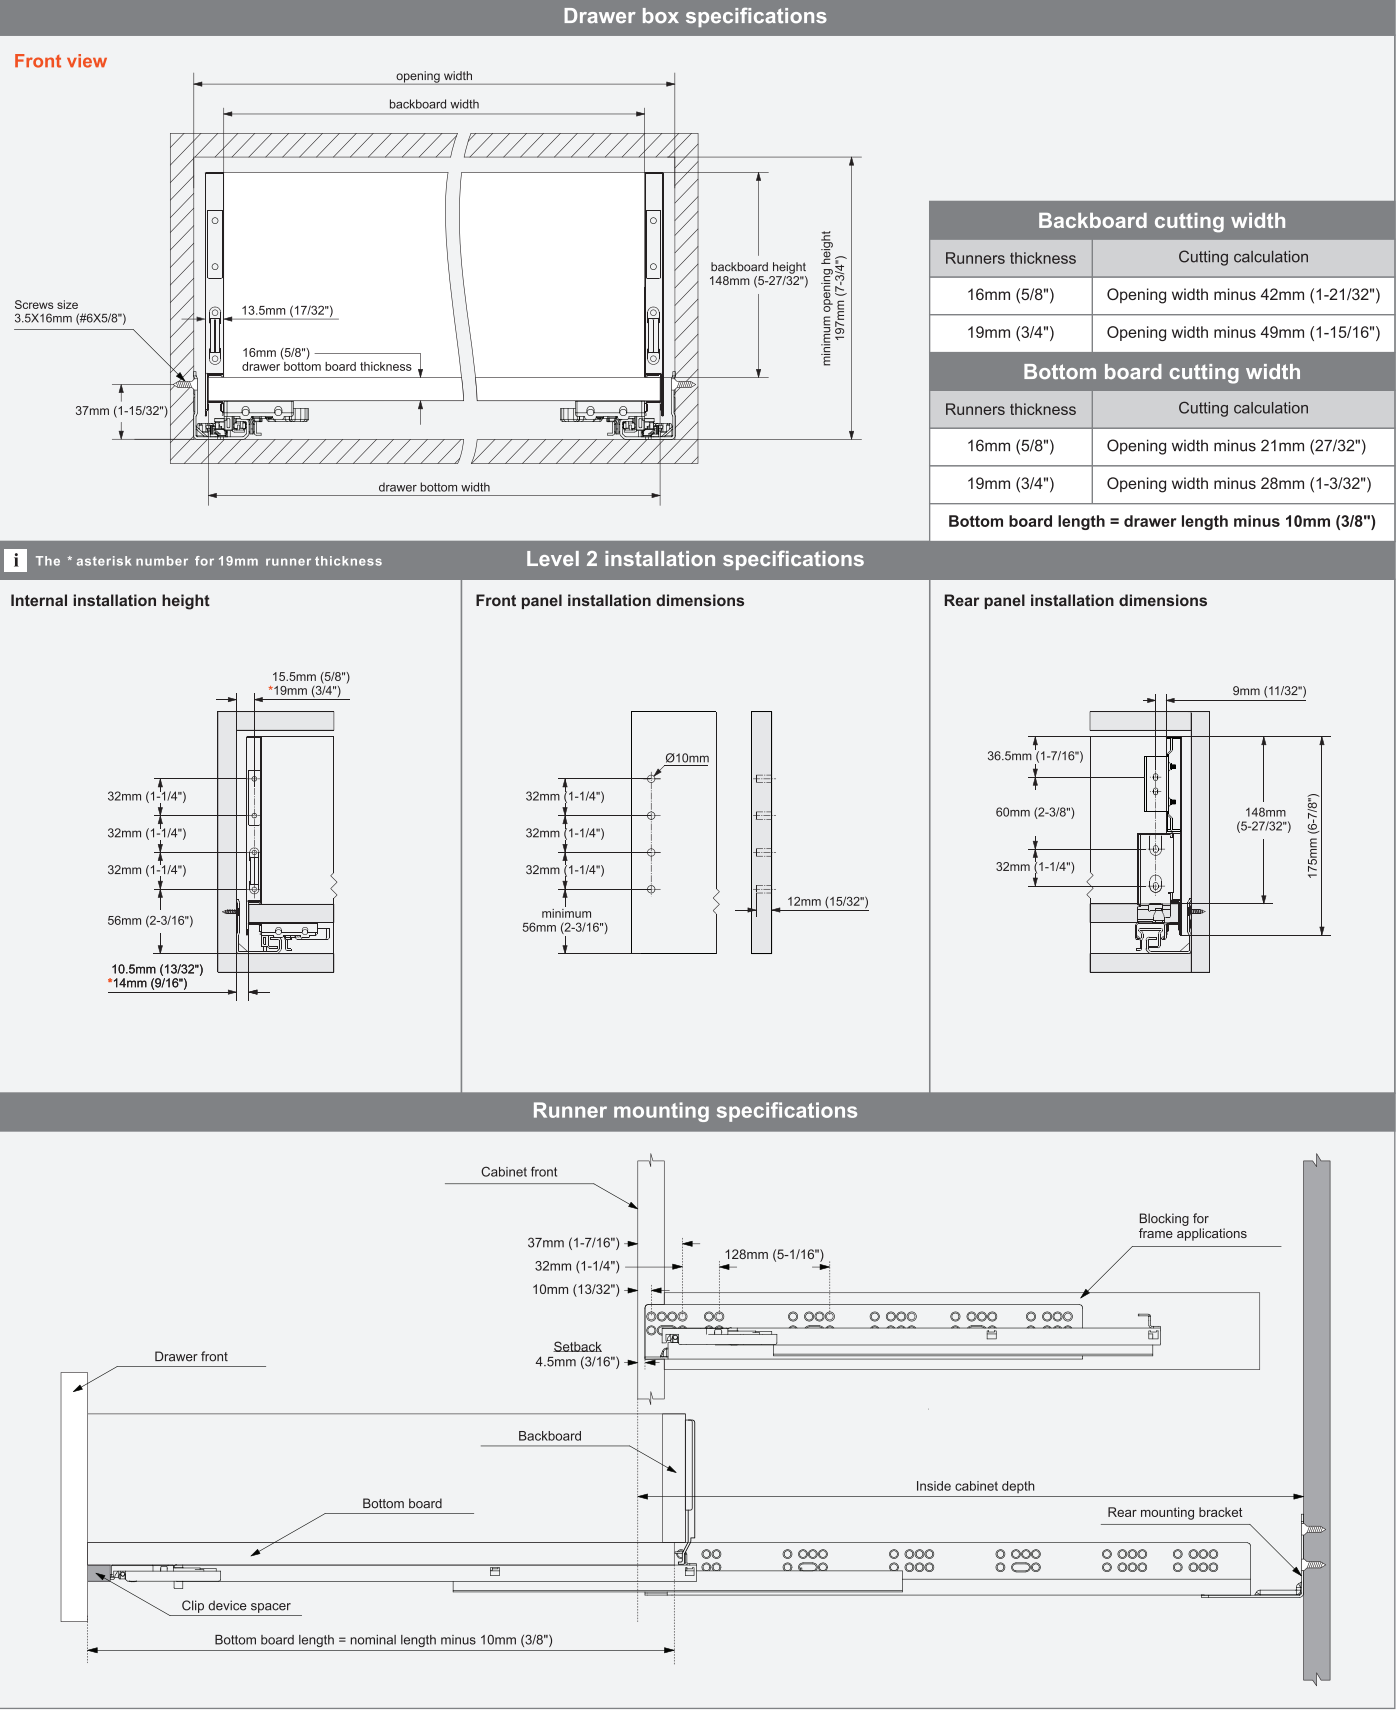

Drawer backboard



16mm (5/8")


63mm (2-15/32")

Opening width minus 42mm (1-21/32") / *49mm (1-15/16")

i

The * asterisk number for 19mm runner thickness

Drawer front



15mm (9/16") Minimum

32mm (1-1/4")

56mm (2-3/16") Minimum

Ø2X12mm


Ø10X12mm

Opening width minus 31mm (1-7/32") / *38mm (1-1/2")

i

The * asterisk number for 19mm runner thickness

Drawer bottom board



16mm (5/8")

Drawer length minus 10mm (3/8")


Opening width minus 21mm (27/32") / *28mm (1-3/32")

i


The * asterisk number for 19mm runner thickness

Drawer backboard

1

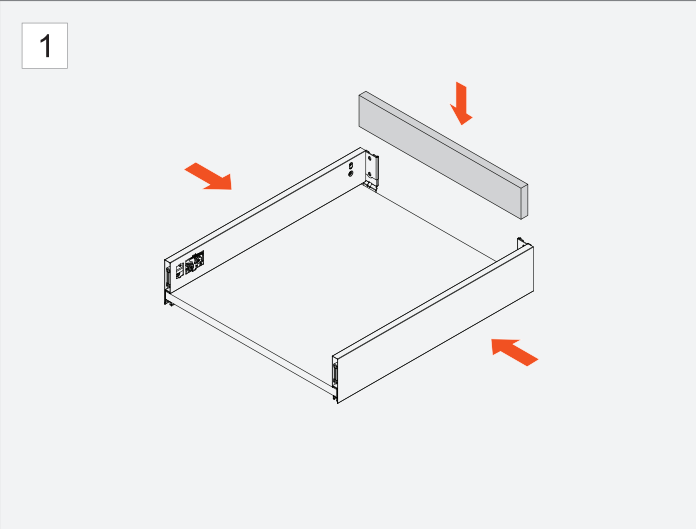


2

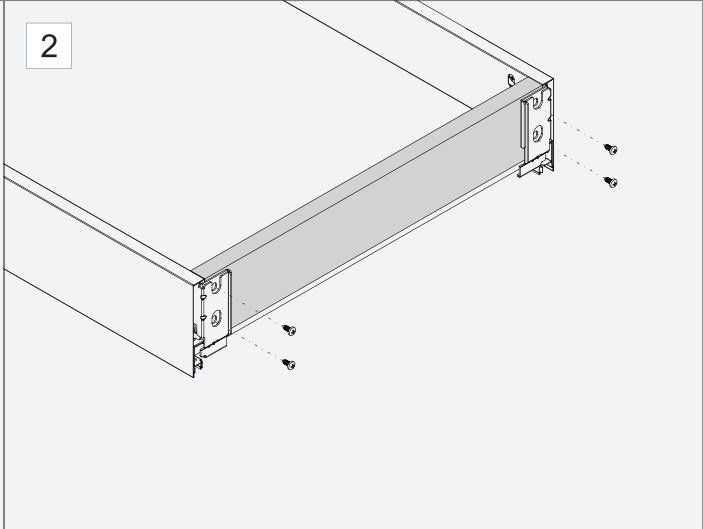


Drawer front


3

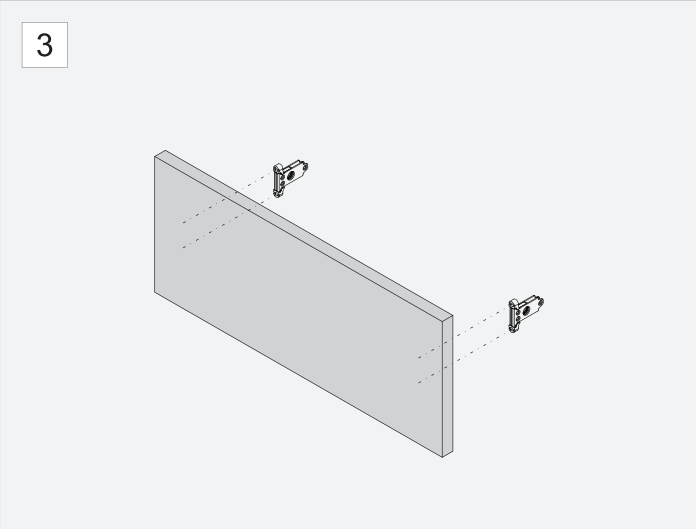

4

i



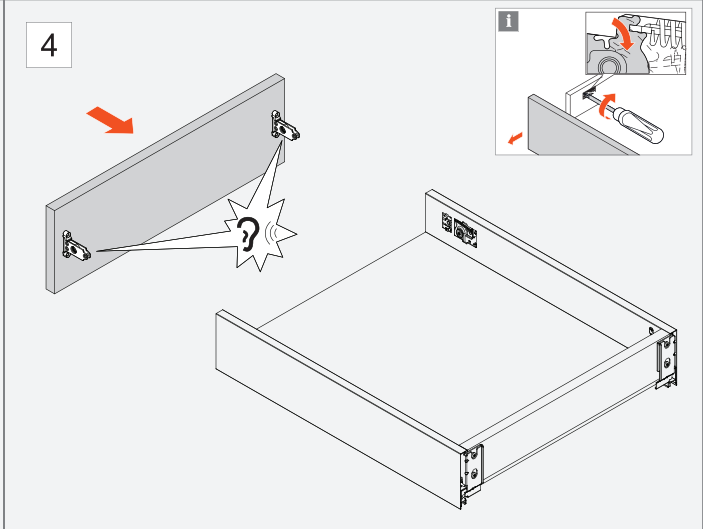


i

Detaching drawer front


Drawer bottom board

5

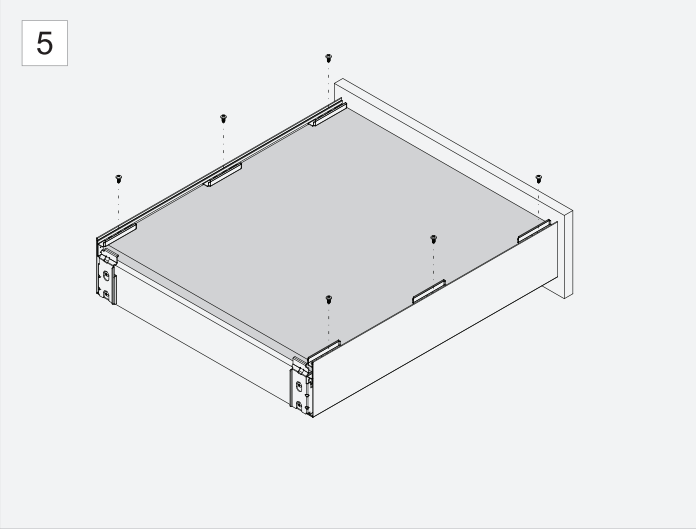

6a

6b

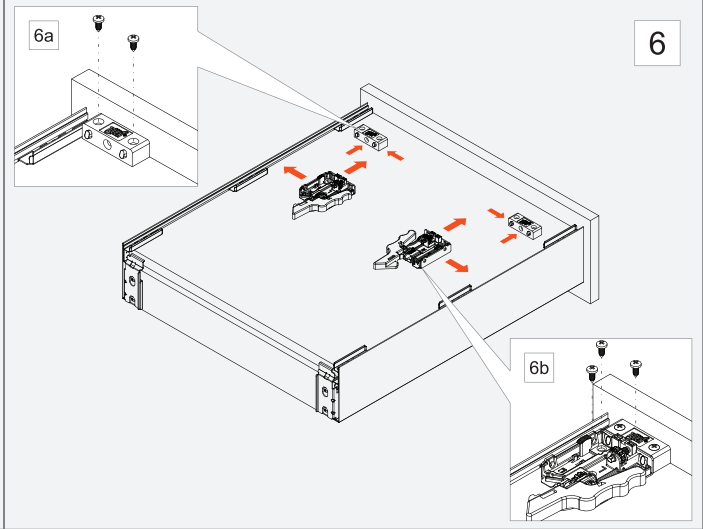

84 | © 2025 TOUCH CABINETS HARDWARE, INC.


© 2025 TOUCH CABINETS HARDWARE, INC. | 85



LVL-2 Drawer Box Specifications


Drawer backboard

i The * asterisk number for 19mm runner thickness

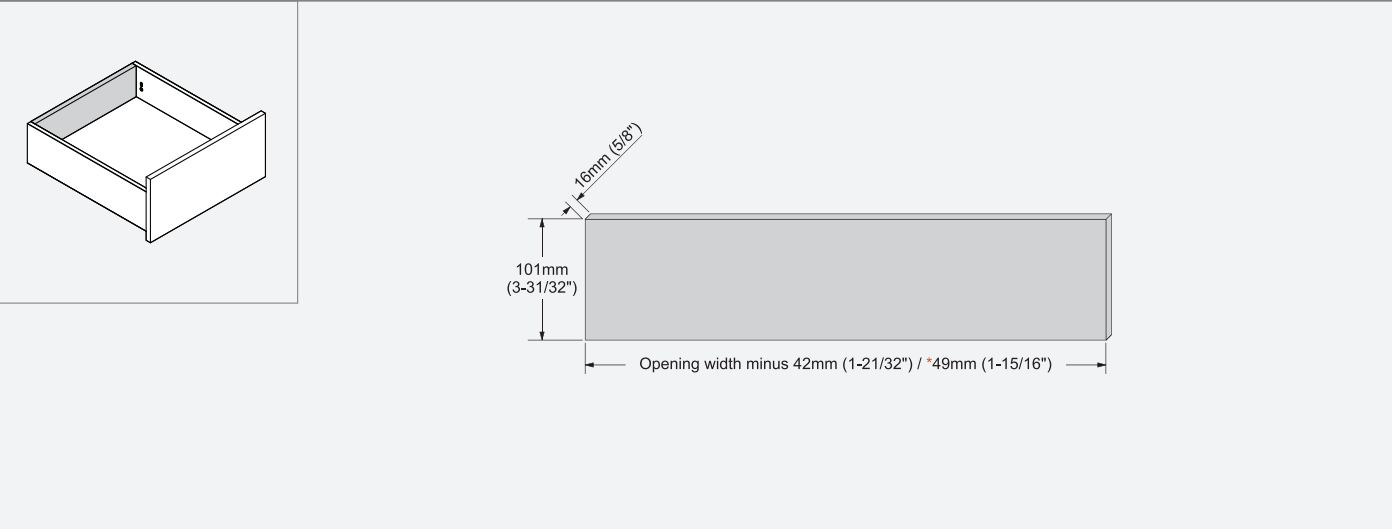


Drawer front

i The * asterisk number for 19mm runner thickness

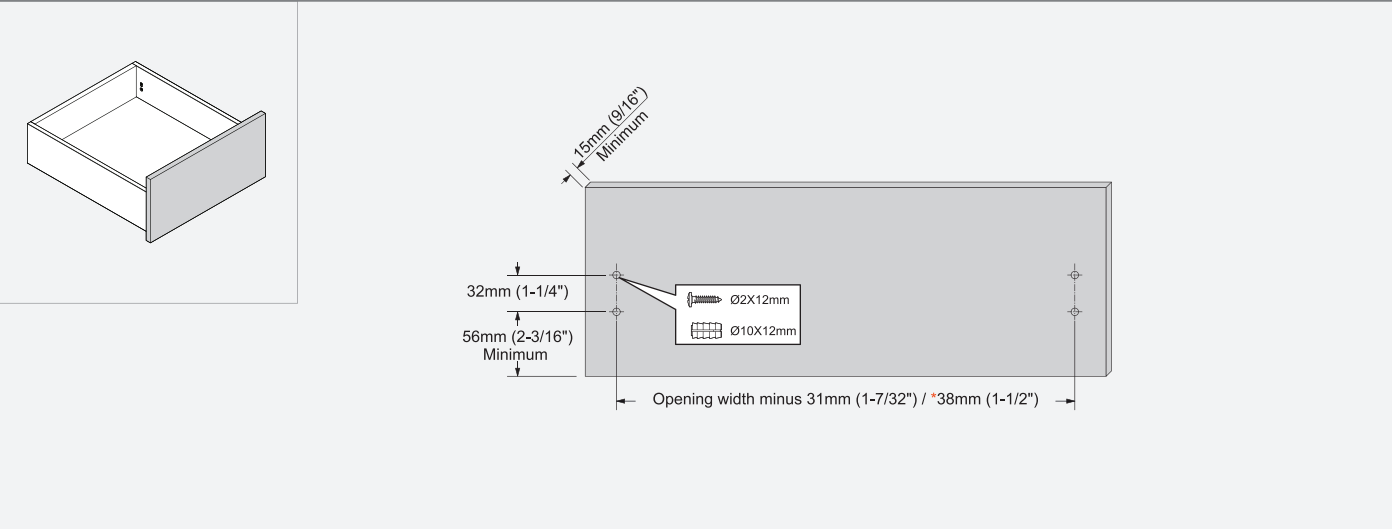


Drawer bottom board

i The * asterisk number for 19mm runner thickness

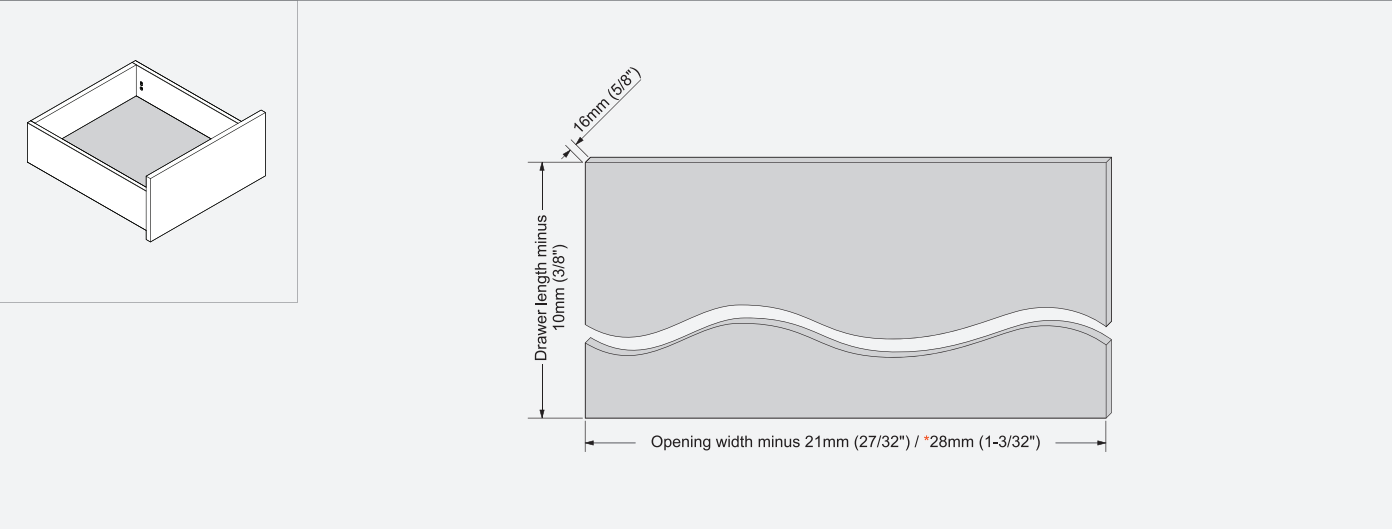


Installation instructions

Drawer backboard

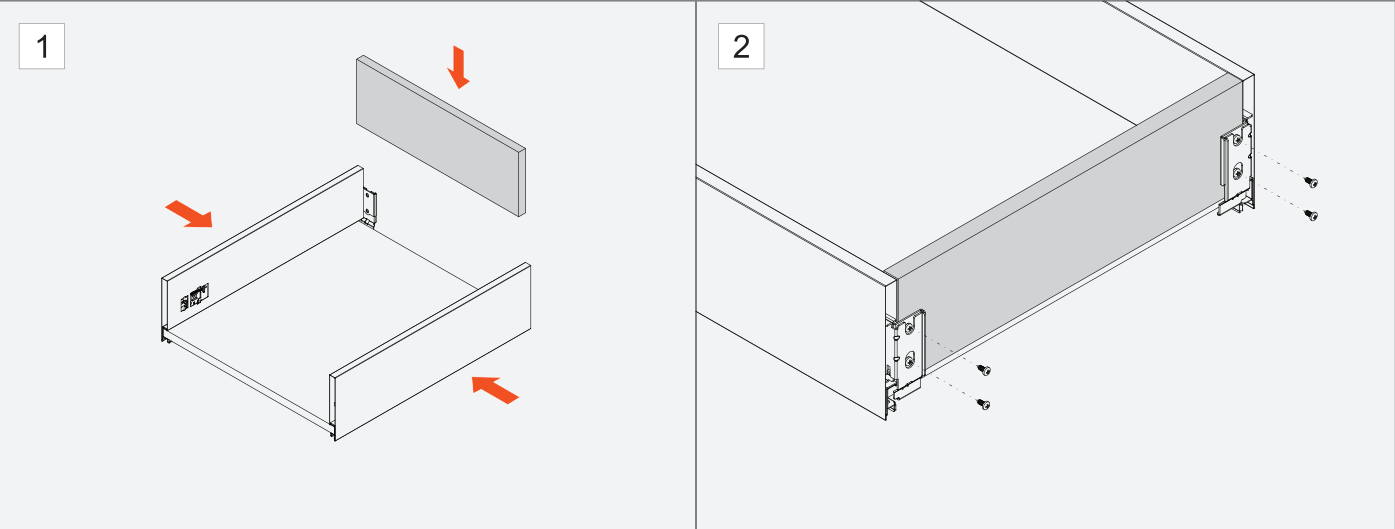


Drawer front

i Detaching drawer front

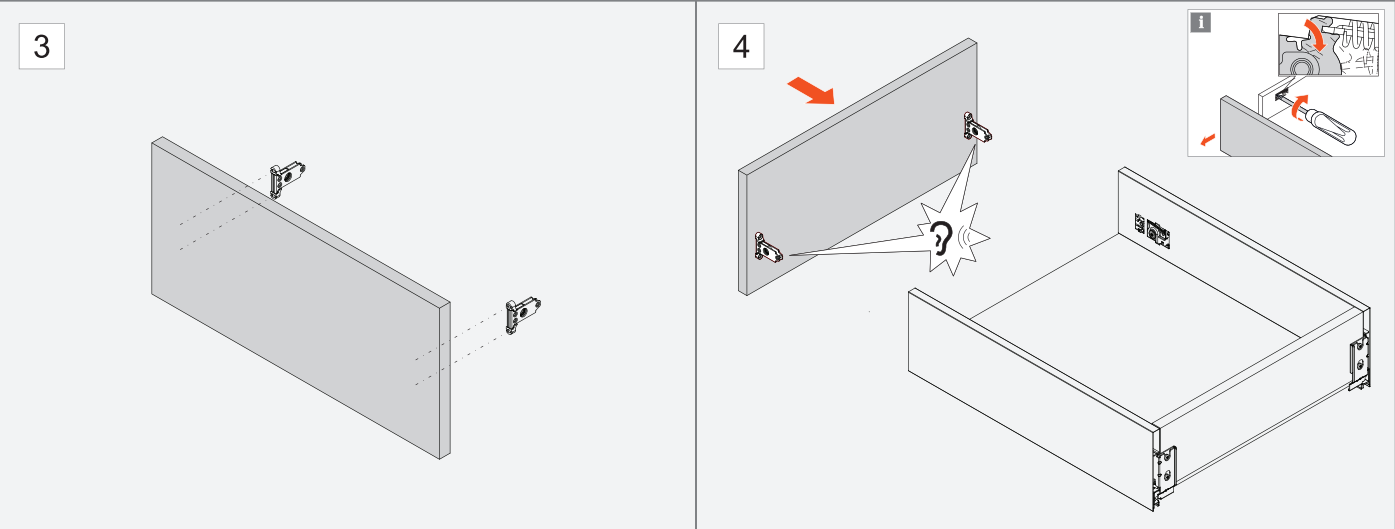



Drawer bottom board

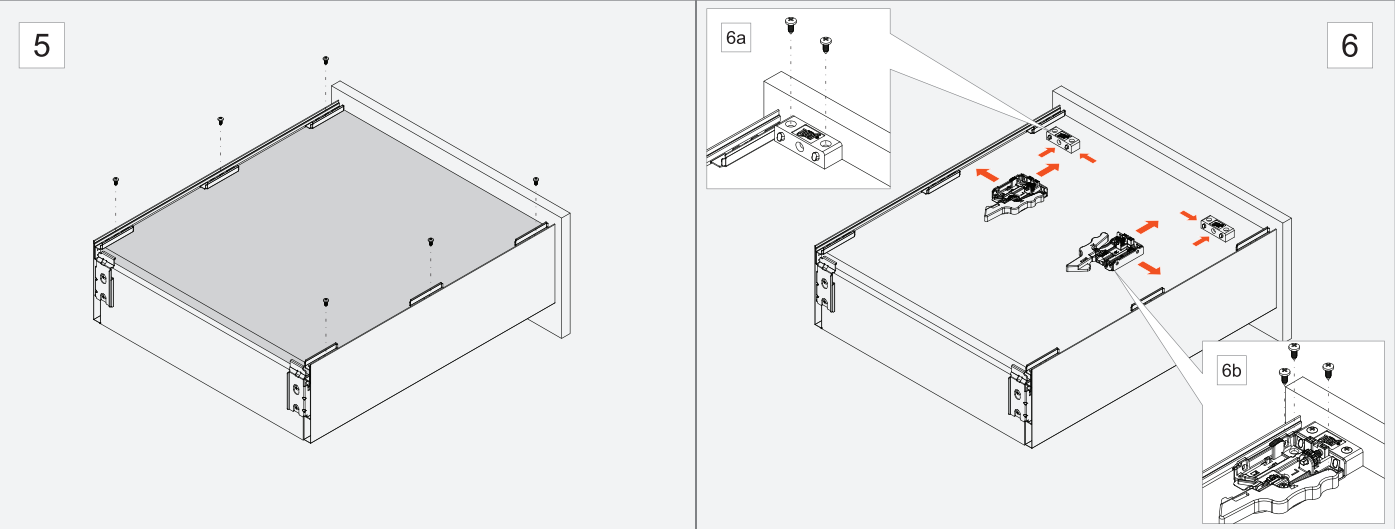

Drawer backboard


i The * asterisk number for 19mm runner thickness




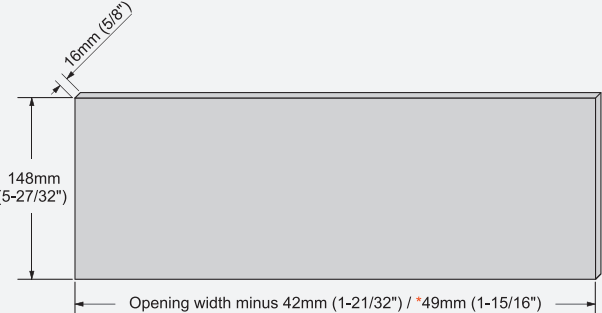

Drawer front


i The * asterisk number for 19mm runner thickness




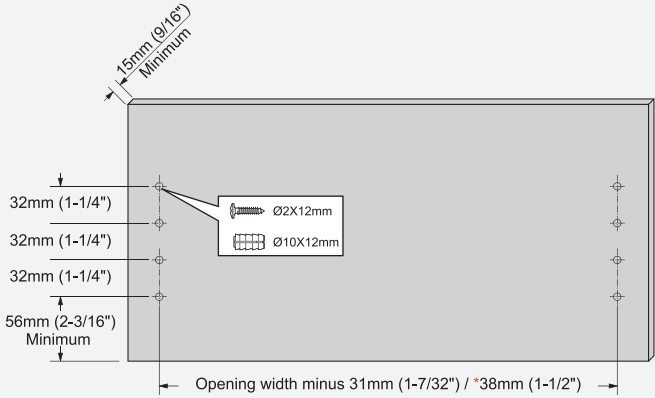

Drawer bottom board


i The * asterisk number for 19mm runner thickness



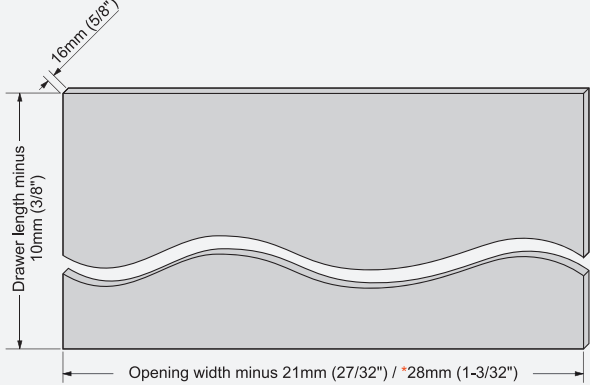


Drawer backboard

1

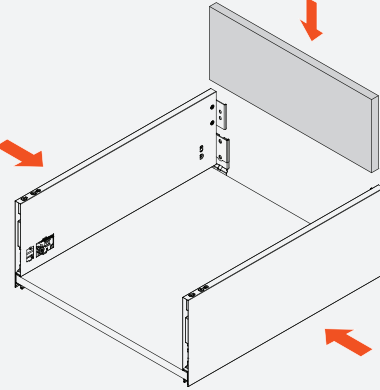


2

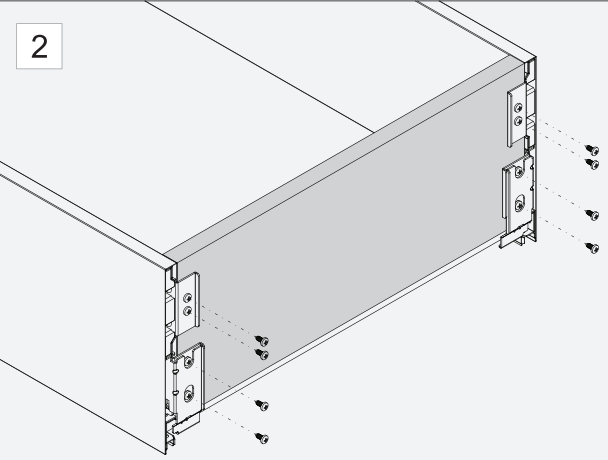


Drawer front

i Detaching drawer front

3

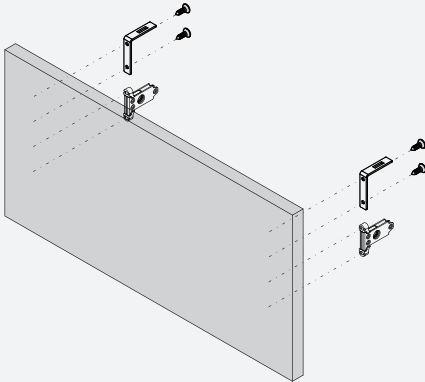


4

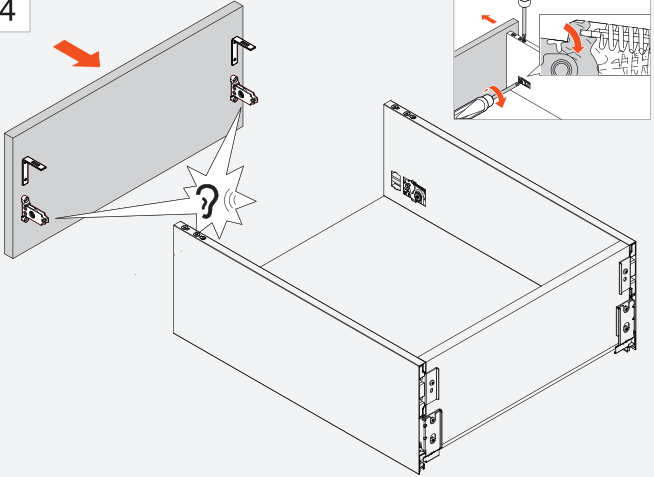


Drawer bottom board


5

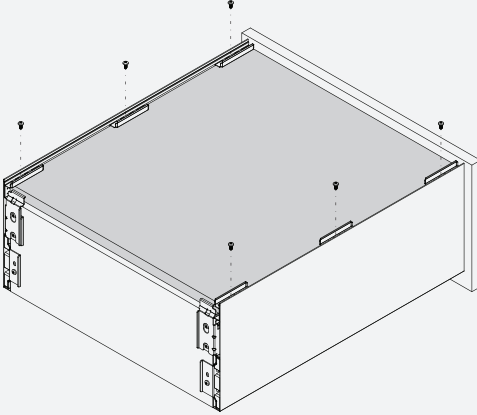


6a



6

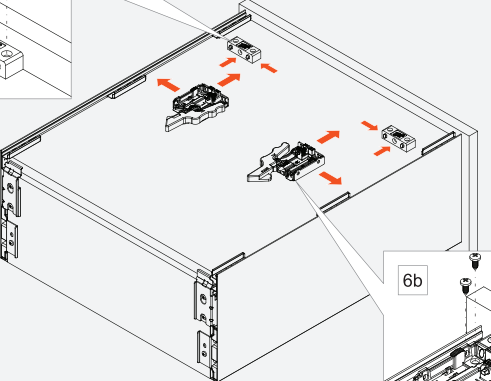

6b






LVL-1 Inner Drawer Specifications


Drawer backboard

i The * asterisk number for 19mm runner thickness

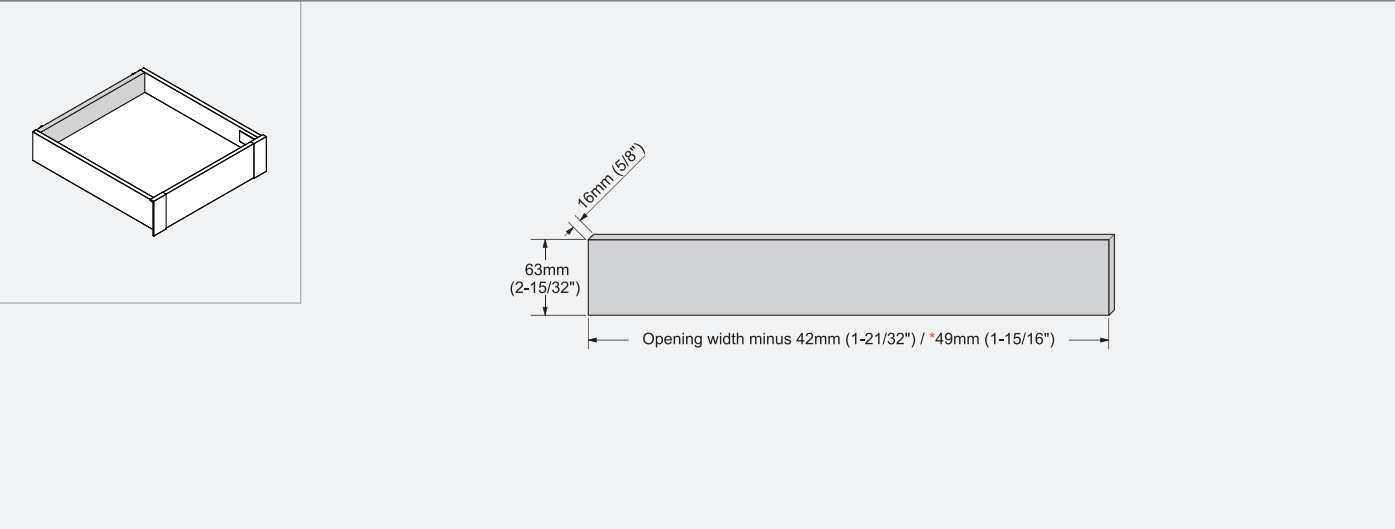


Drawer front

i The * asterisk number for 19mm runner thickness

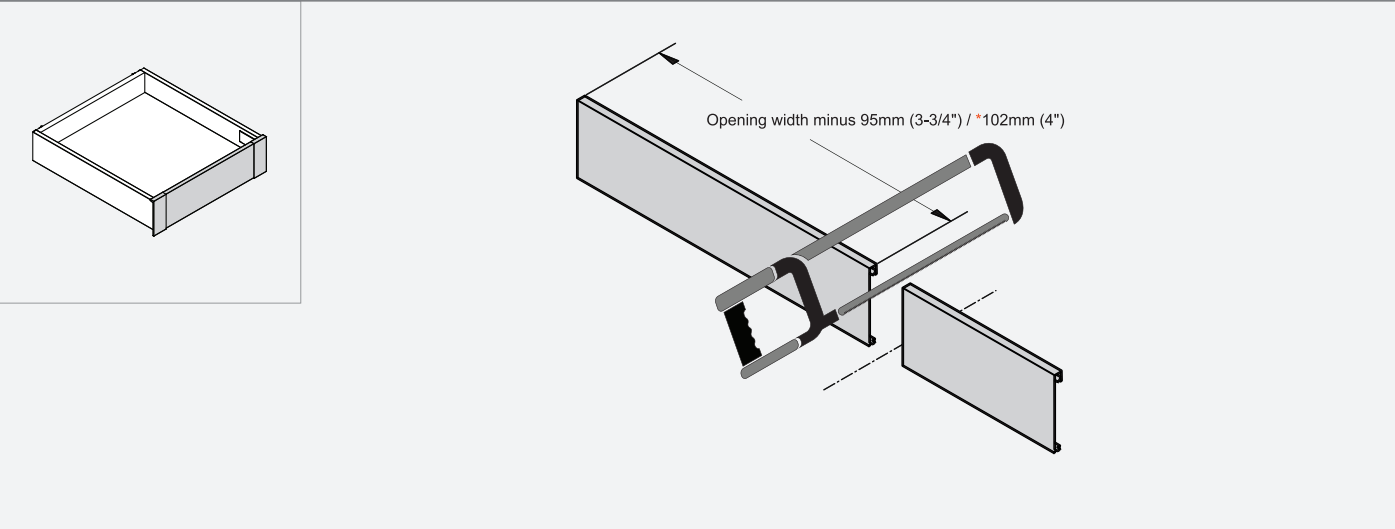


Drawer bottom board

i The * asterisk number for 19mm runner thickness

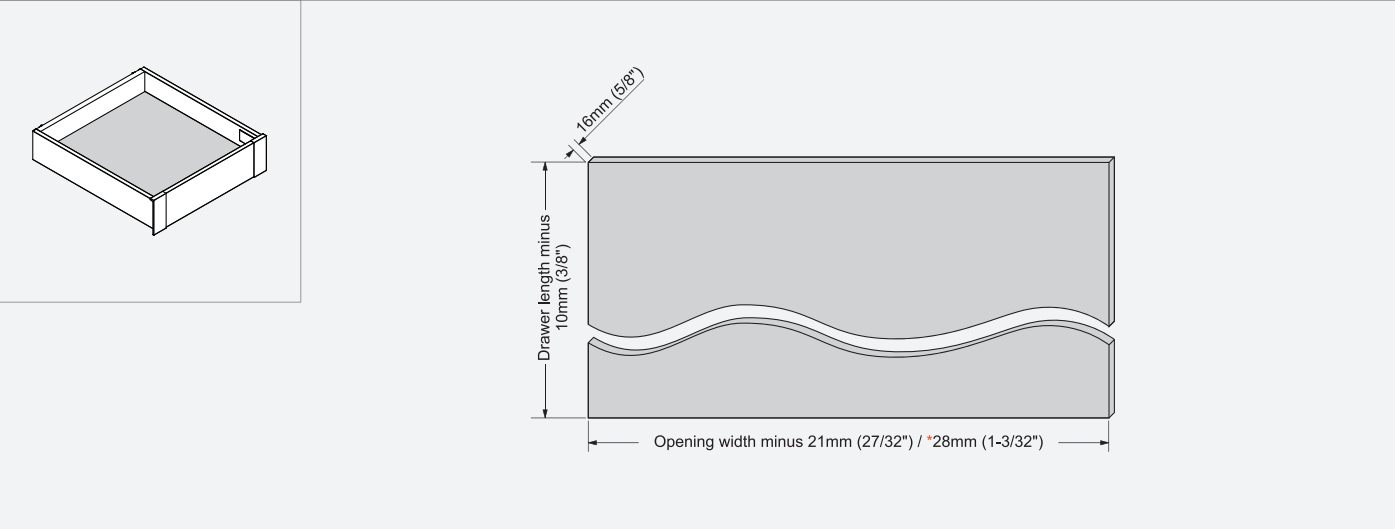


Installation instructions

Drawer backboard

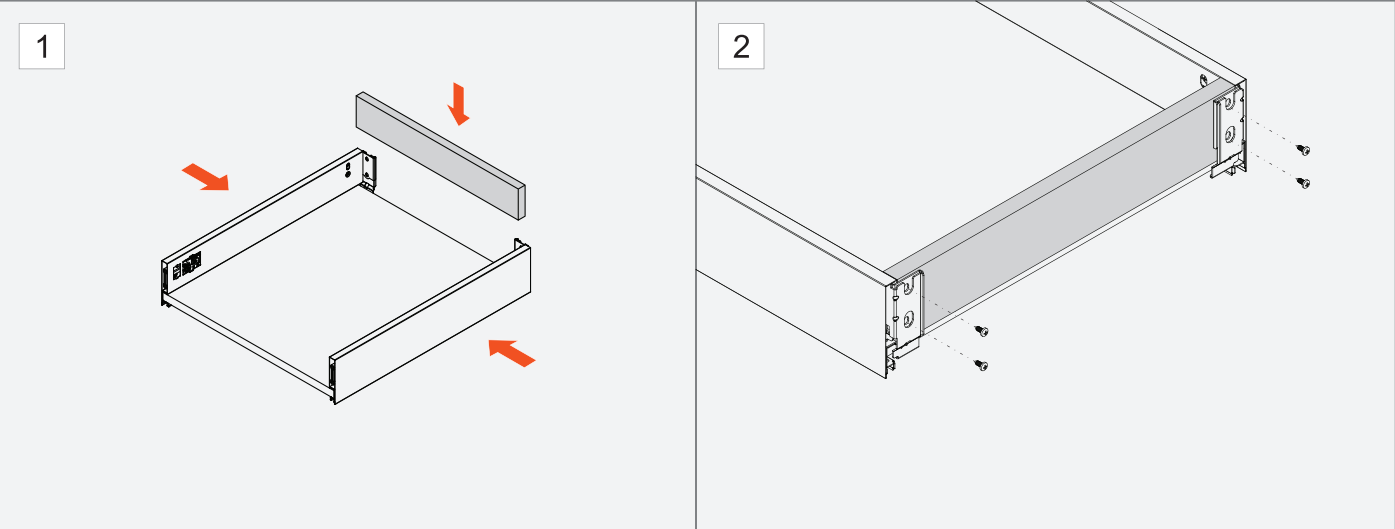


Drawer front

i Detaching drawer front

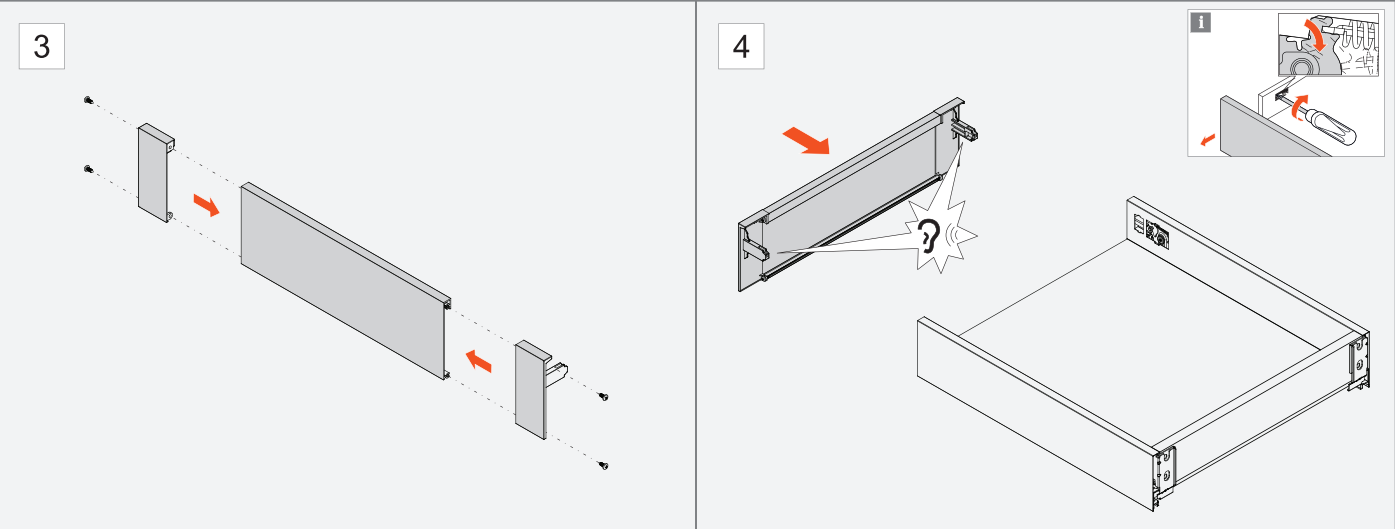


Drawer bottom board

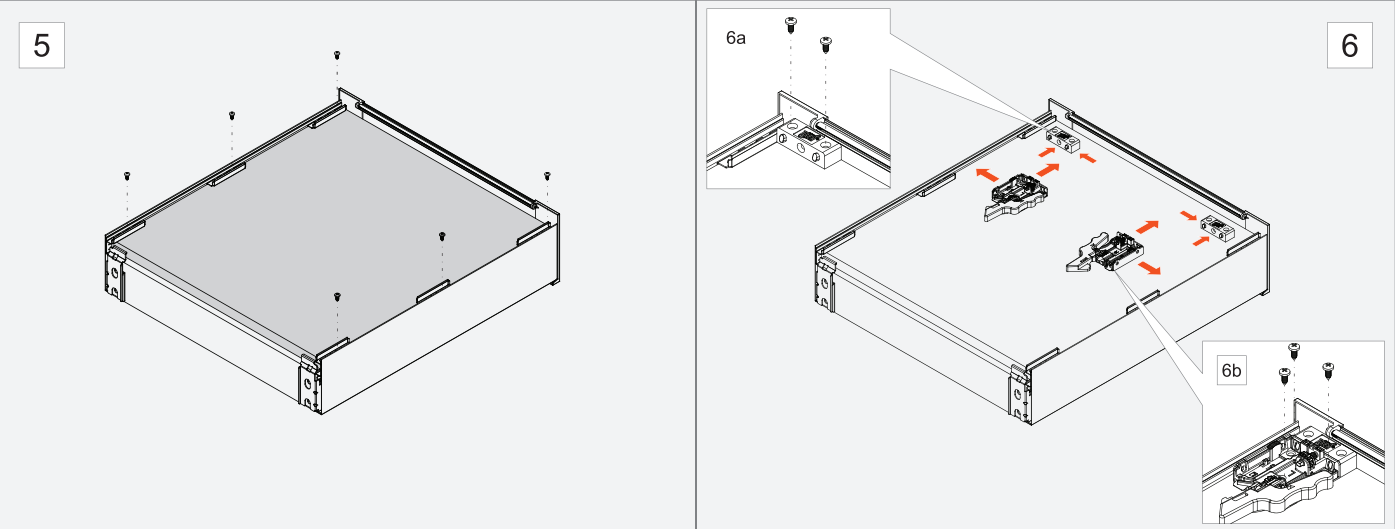


Drawer backboard

i The * asterisk number for 19mm runner thickness

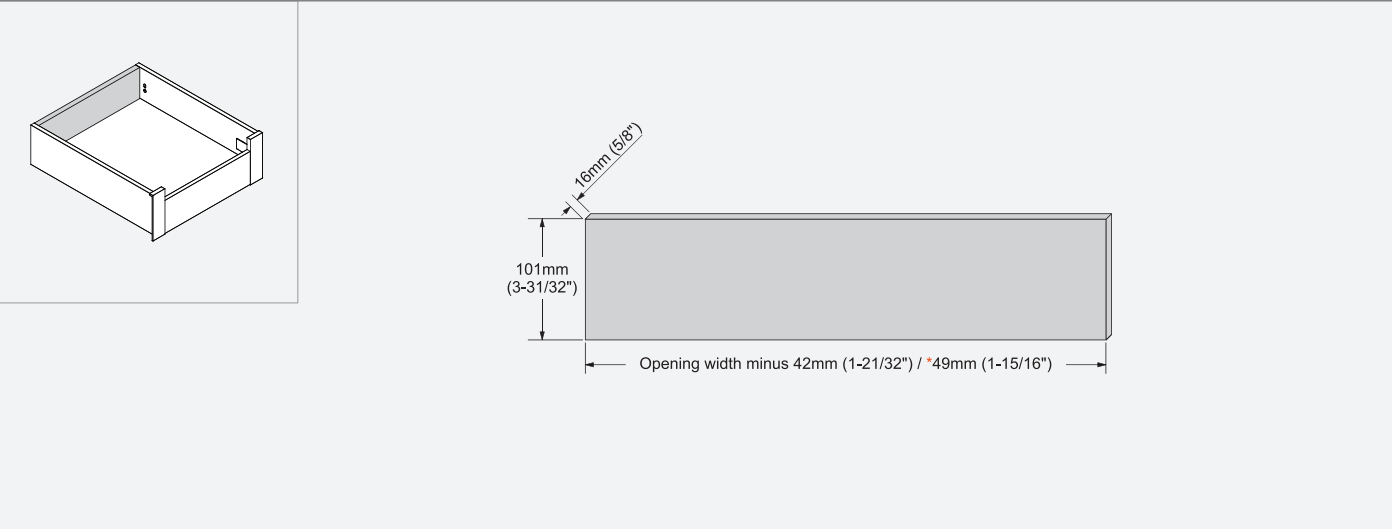


Drawer front

i The * asterisk number for 19mm runner thickness

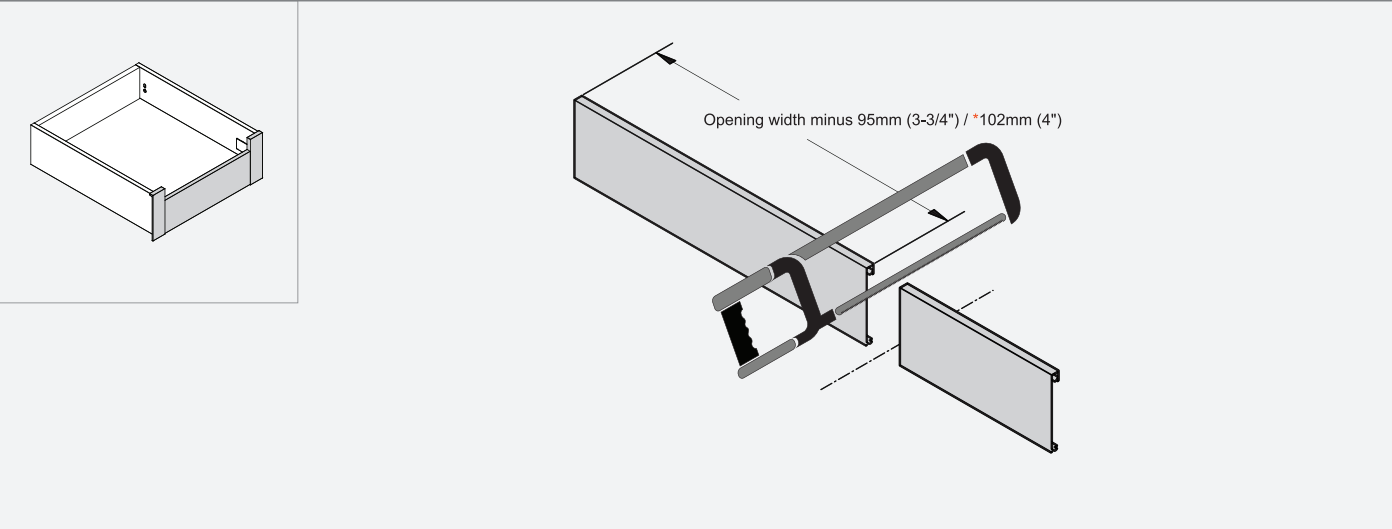


Drawer bottom board

i The * asterisk number for 19mm runner thickness

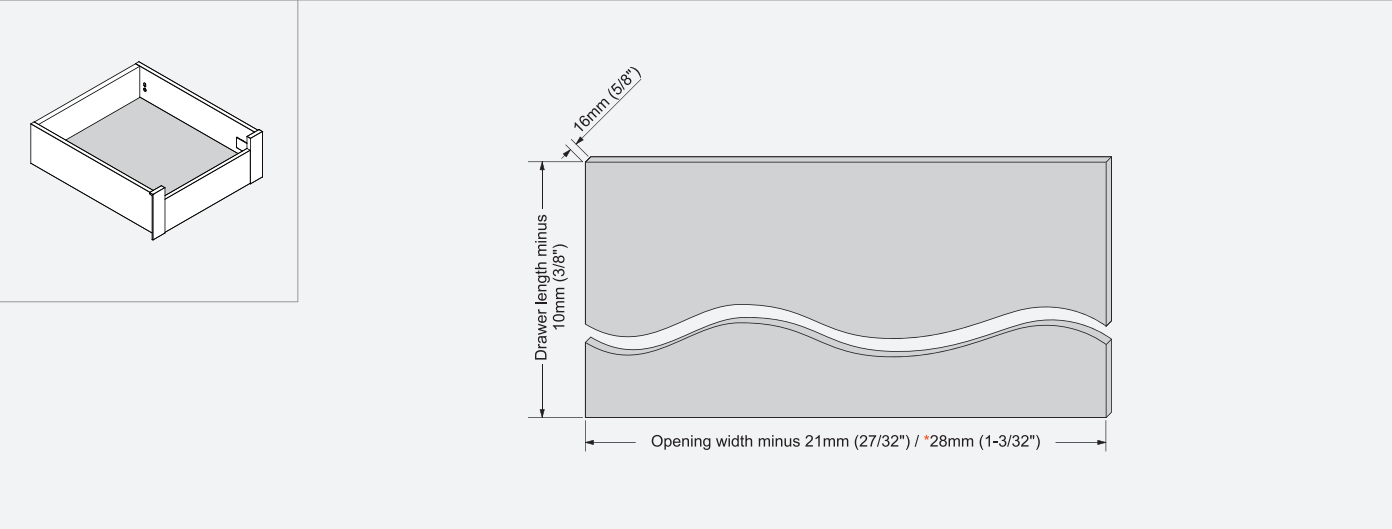


Drawer backboard

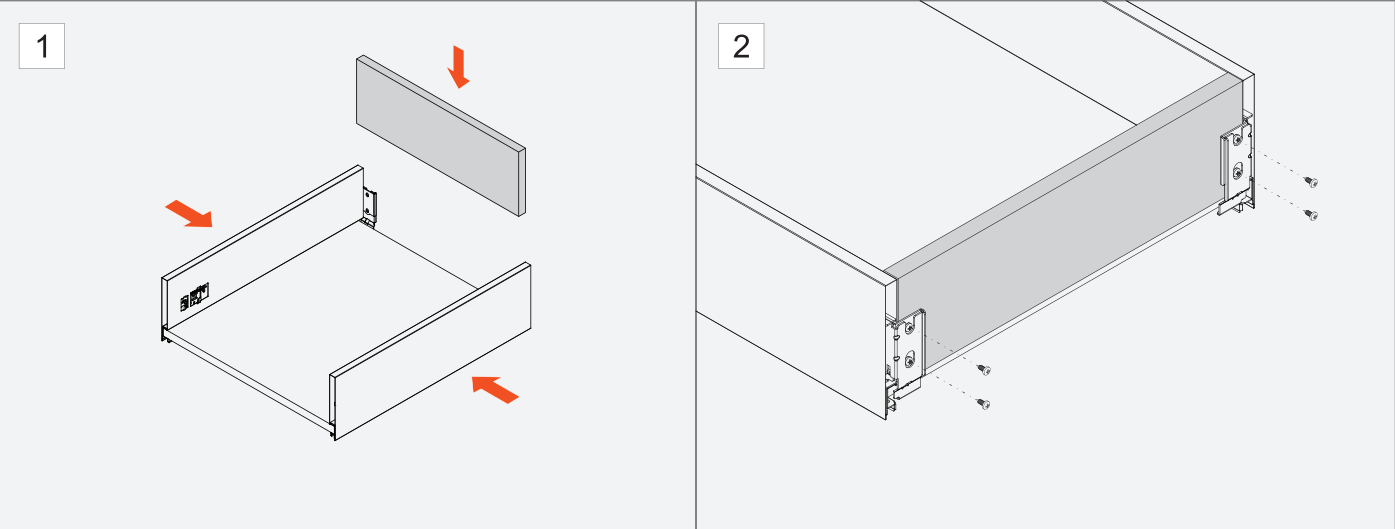


Drawer front

i Detaching drawer front

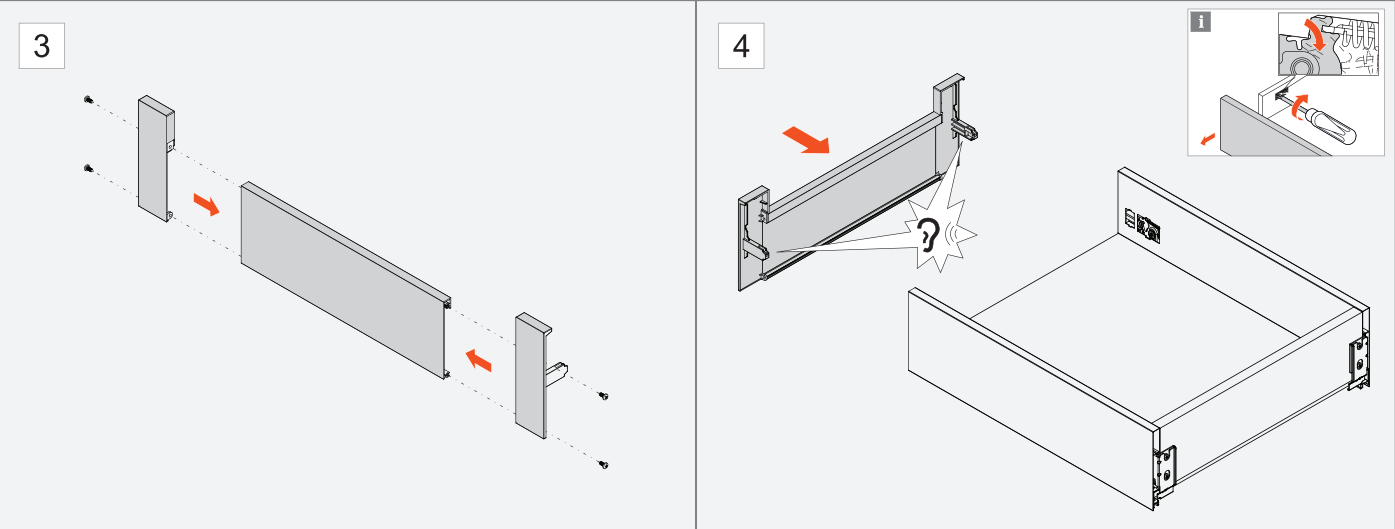



Drawer bottom board

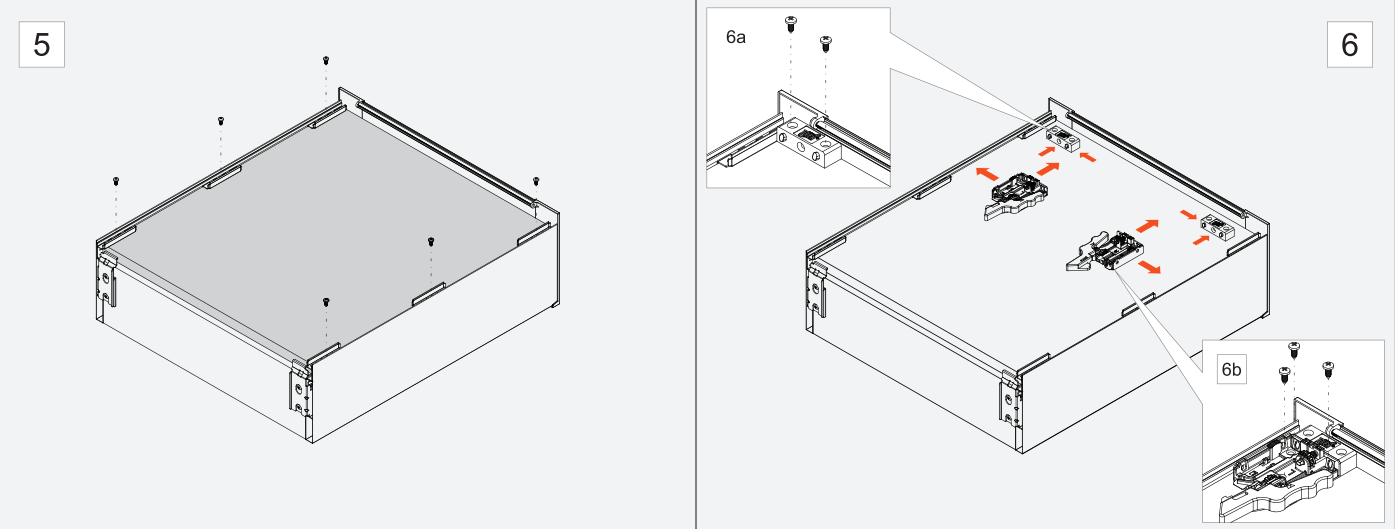

Drawer backboard


i The * asterisk number for 19mm runner thickness




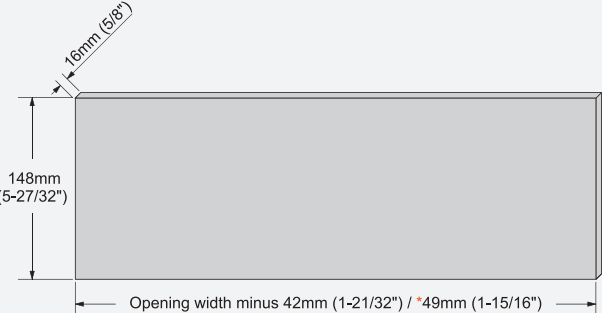

Drawer front


i The * asterisk number for 19mm runner thickness




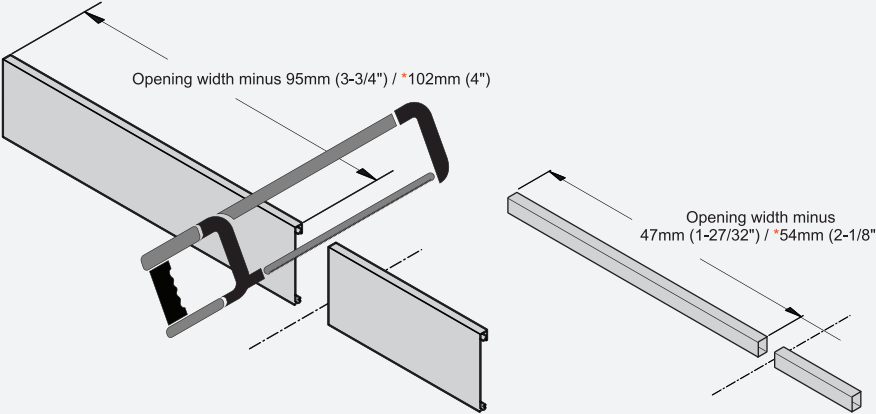

Drawer bottom board


i The * asterisk number for 19mm runner thickness



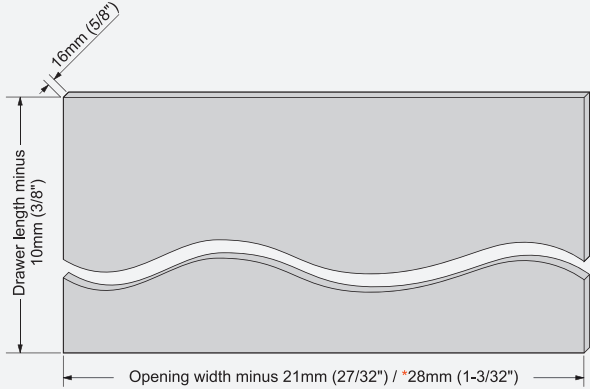


Drawer backboard

1

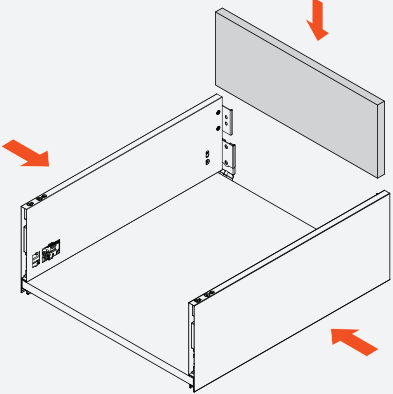


2

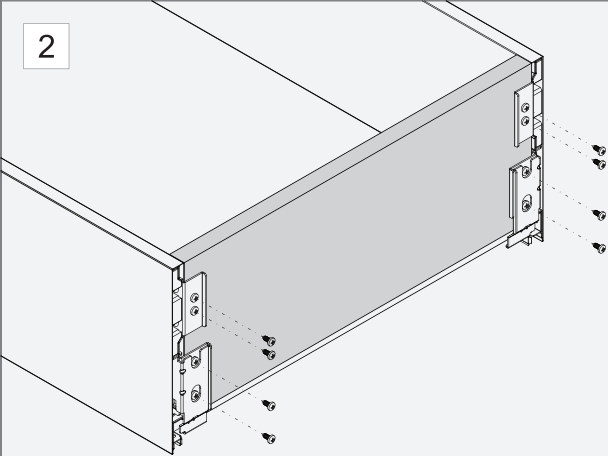


Drawer front

i Detaching drawer front

3

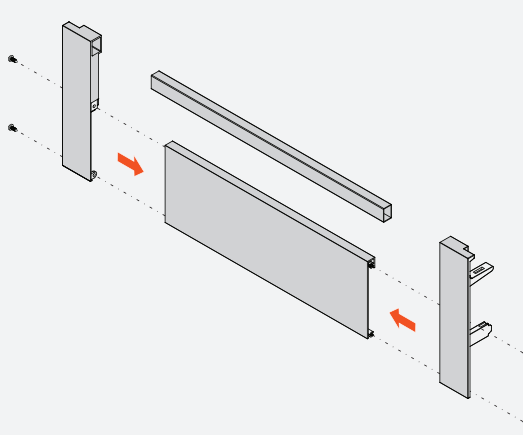


4

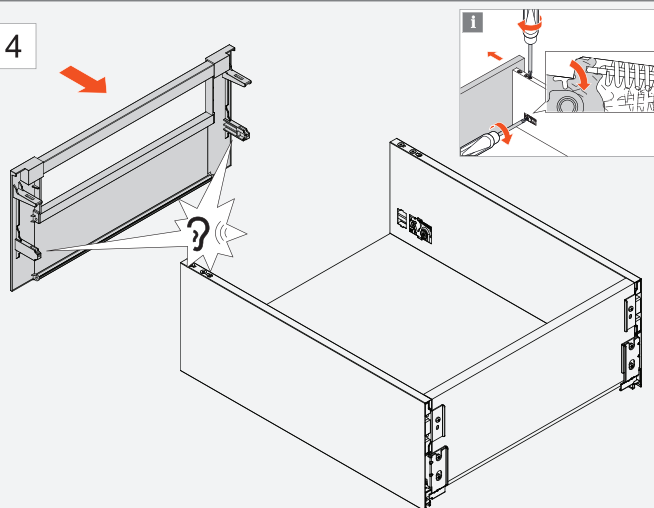


Drawer bottom board


5

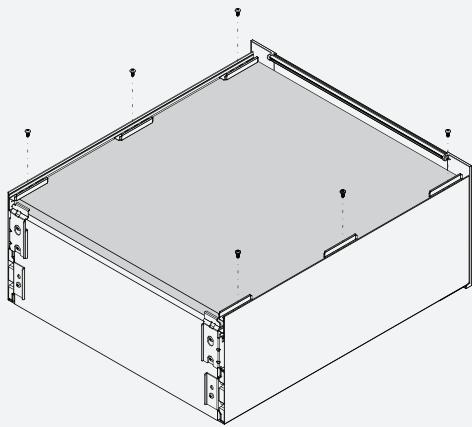

6a



6

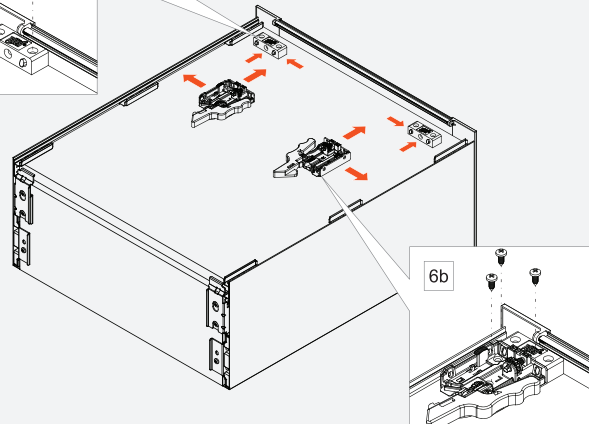




LVL-1 Using Side Rails Specifications


Drawer backboard

i The * asterisk number for 19mm runner thickness

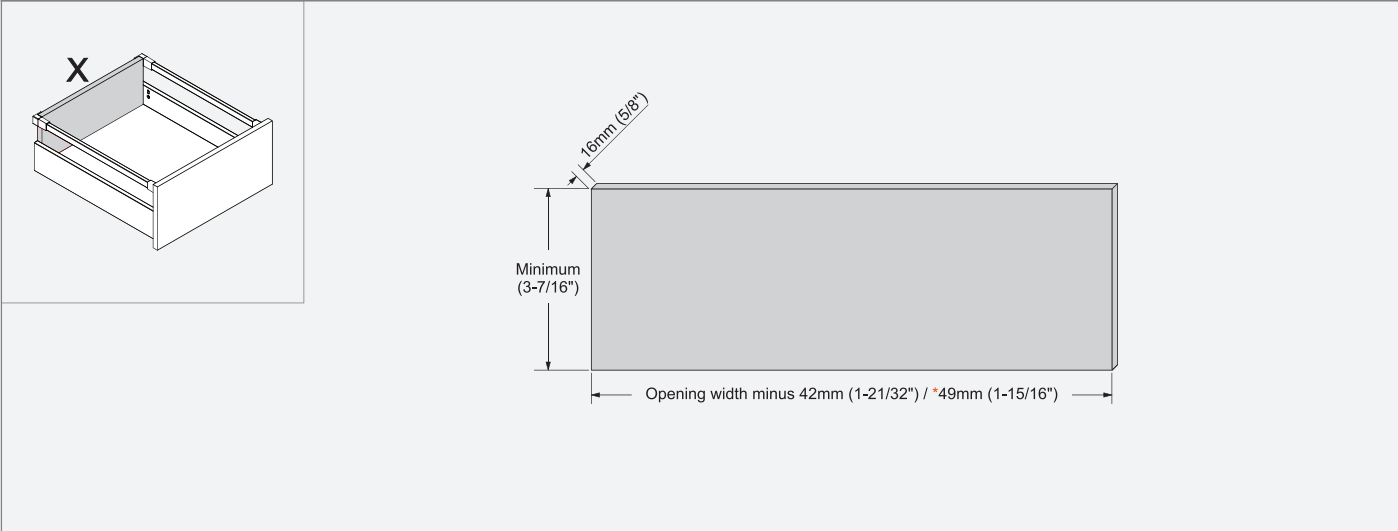


Drawer front

i The * asterisk number for 19mm runner thickness

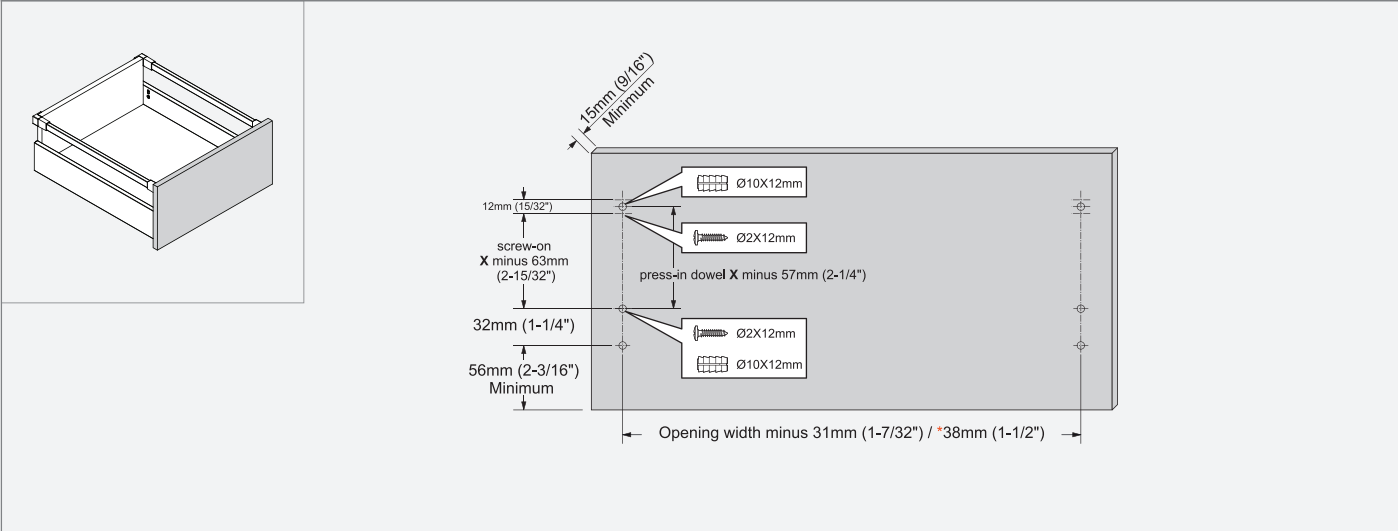


Drawer bottom board

i The * asterisk number for 19mm runner thickness

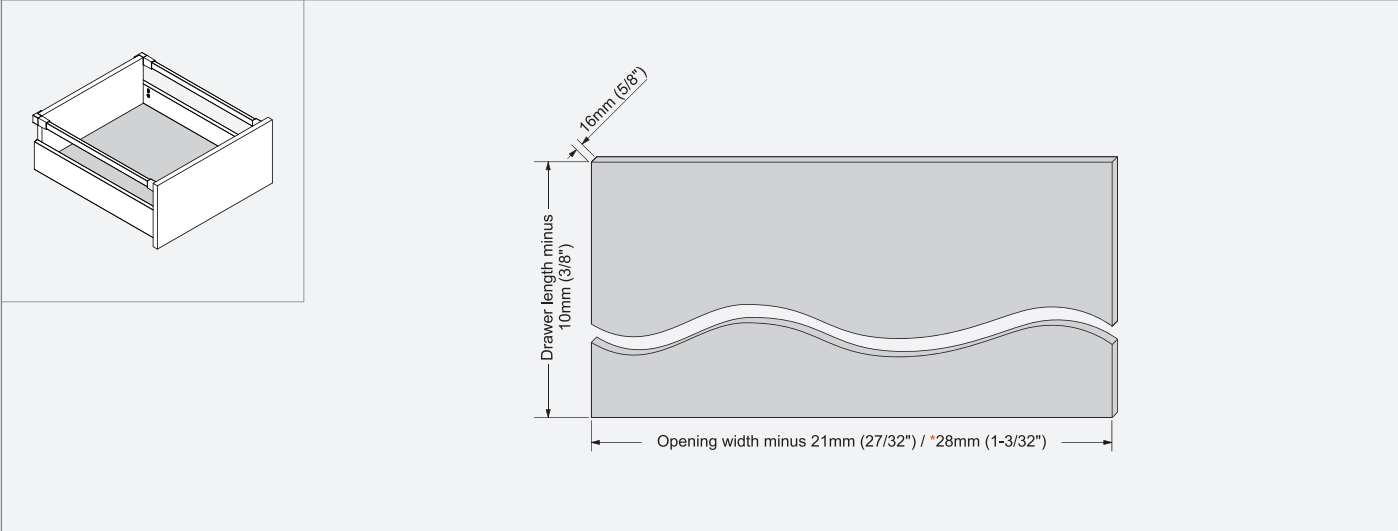


Installation instructions

Drawer backboard

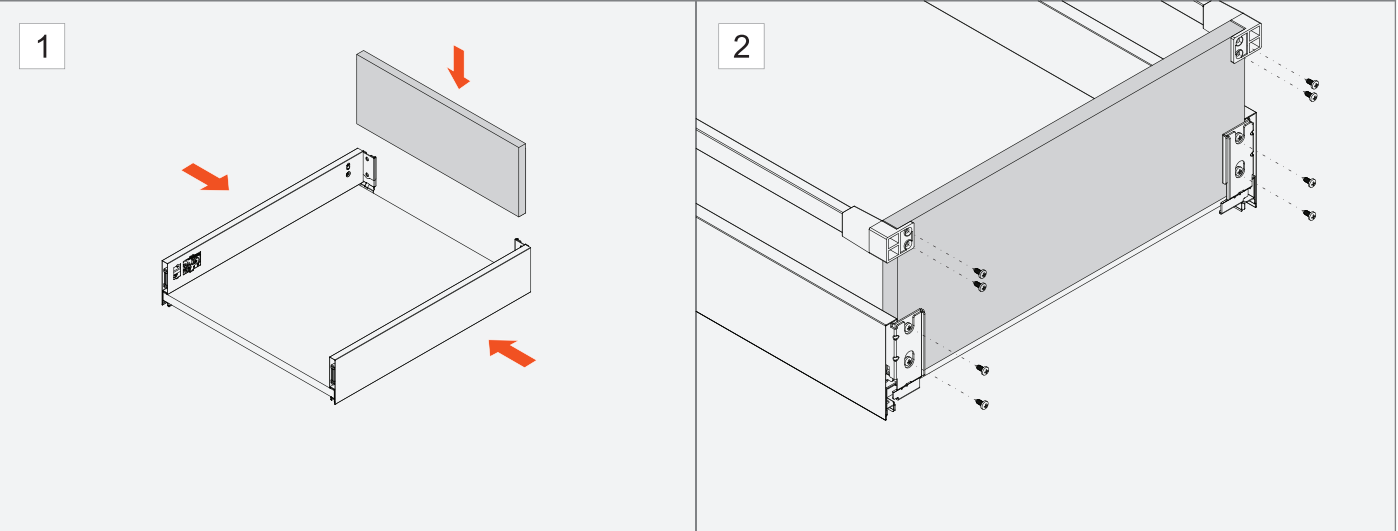




Drawer front

i Detaching drawer front

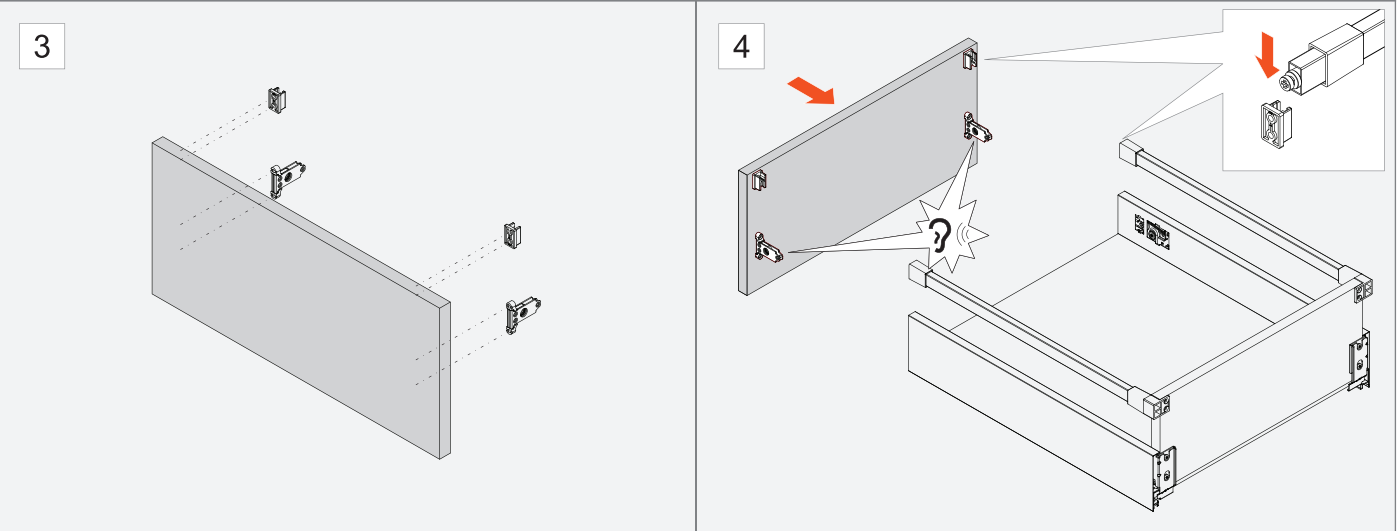

Drawer bottom board

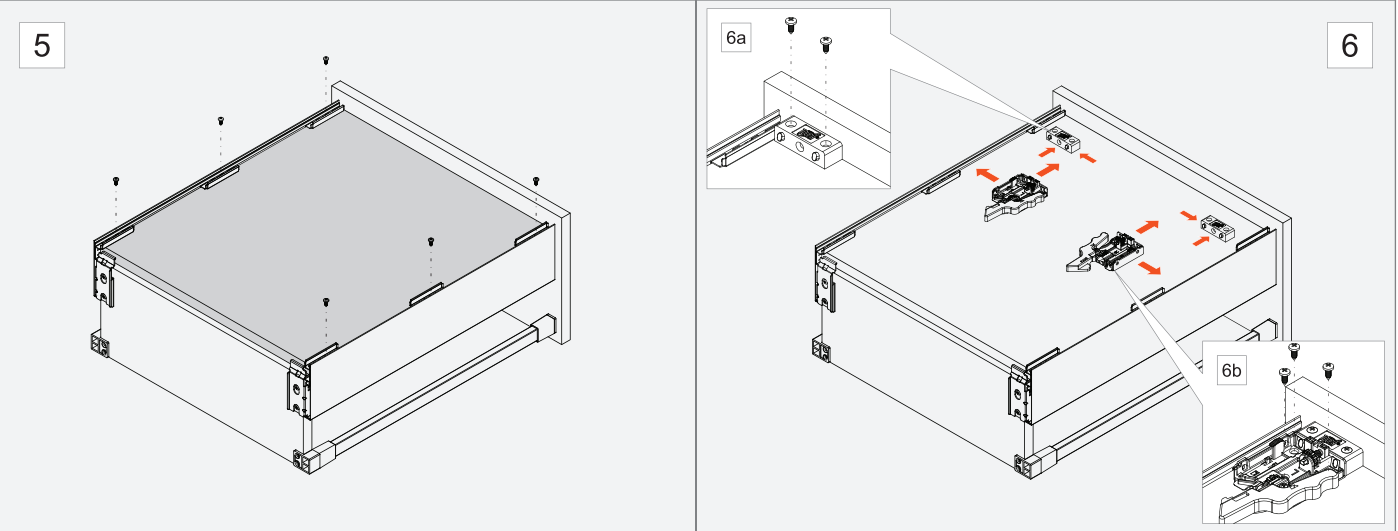

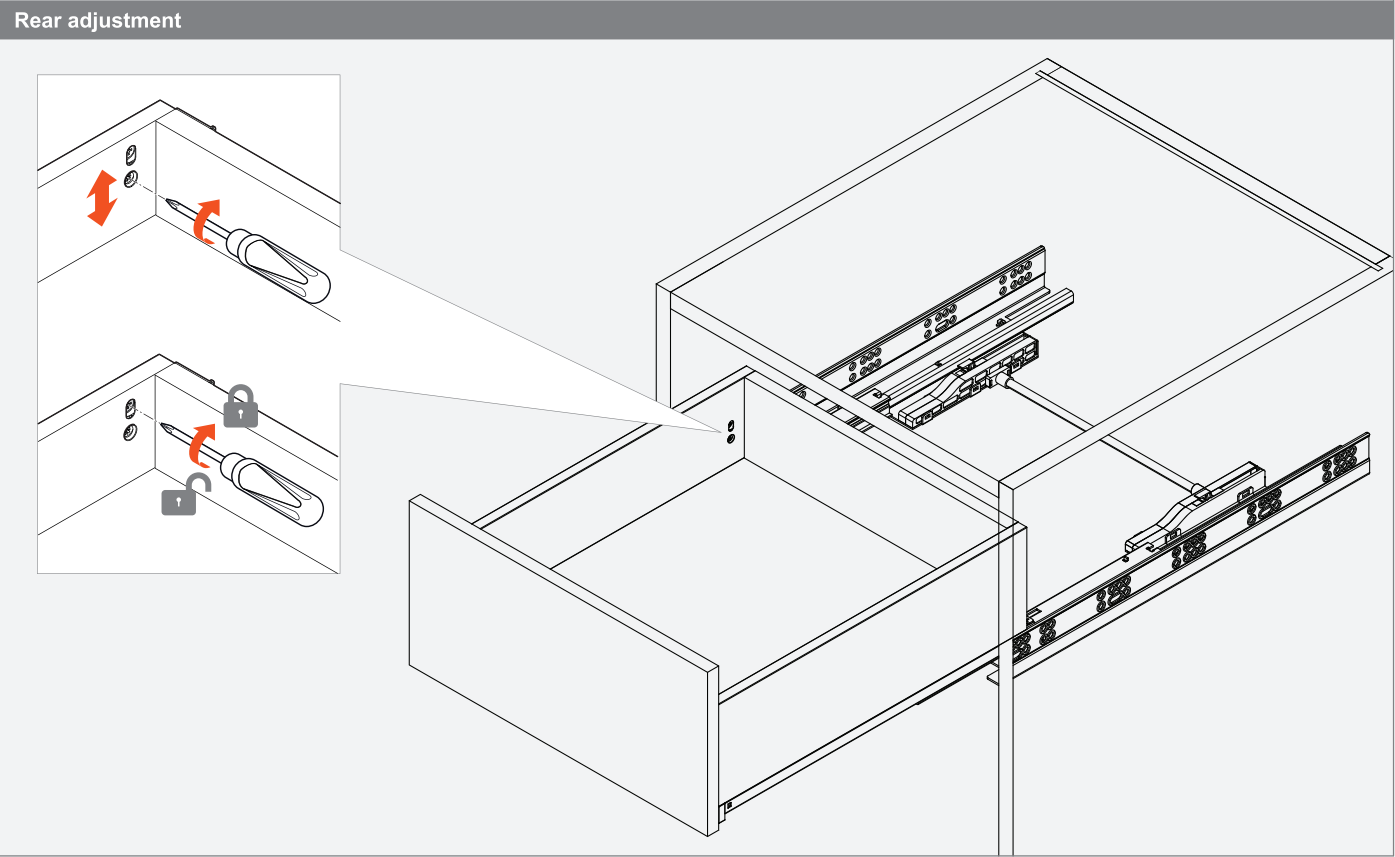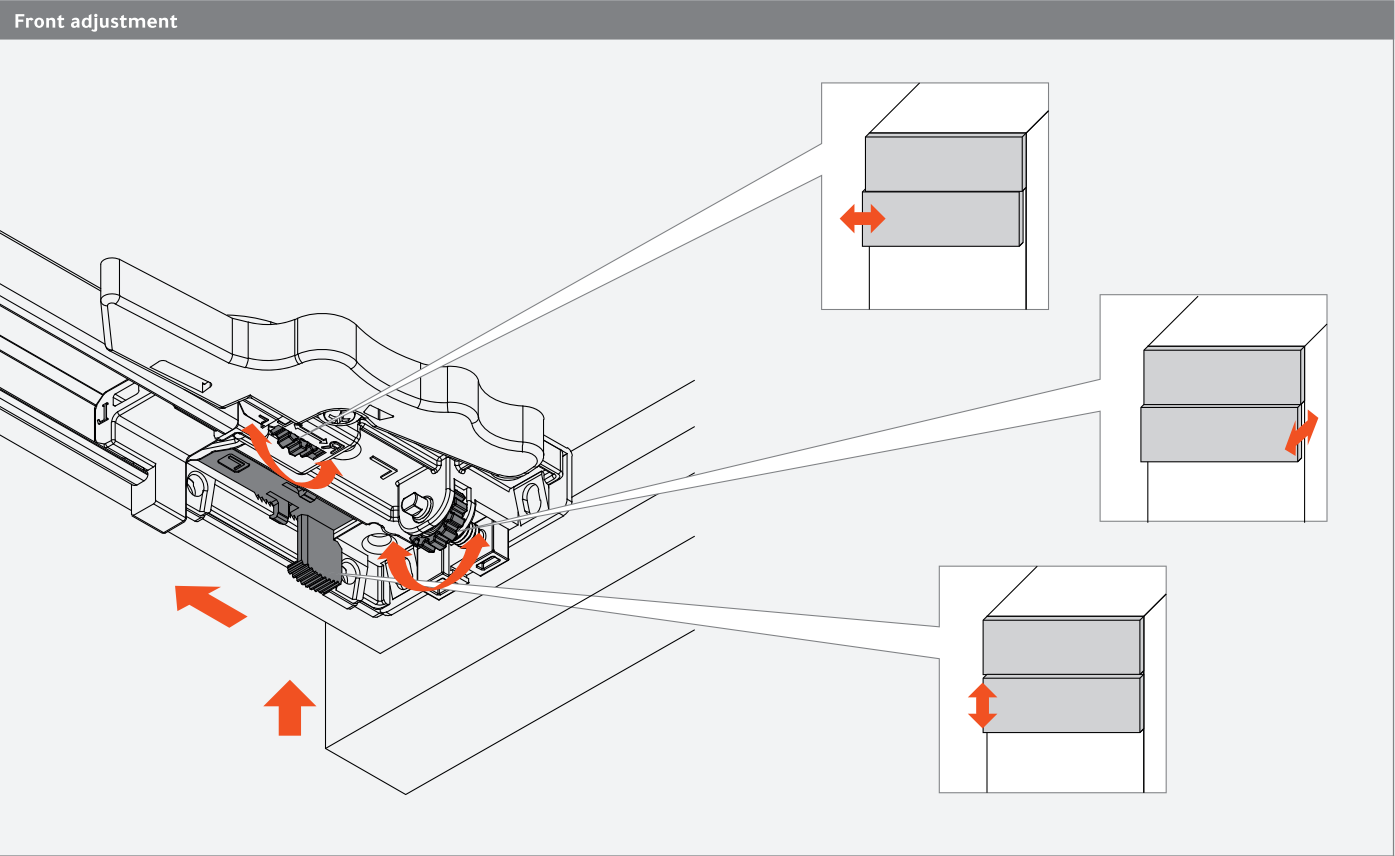

Notes



Touch Cabinets Hardware

www.TouchCabinetsHardware.com