

T-X SOFT-CLOSE 165 DEGREE HINGES

TCH-11400 SERIES




Features

- Open angle 165°
- Controlled adjustment with gap stability
- Opening angle restrictor for 130° integrated into the hinge link
- Soft-close built-in hydraulic damper
- Diameter of hinge cup 35mm
- Boring distance range 3mm to 7mm
- Height of hinge cup 11.5mm
- For door thickness up to 21mm
- Compatible with existing mounting plates
- Finish: Nickel-plated



TCH-11400 T-X 165 F




Straight-arm

D	H	K	3	4	5	6	7
0	16	17	18	19	20		
3	13	14	15	16	17		
4	12	13	14	15	16		
5	14	15	16	17	18		

Abbreviations

H	mounting plate height
K	cup boring distance
D	door overlay

TCH-11400 T-X 165 H




Half-cranked

D	H	K	3	4	5	6	7
0	7	8	9	10	11		
3	4	5	6	7	8		
4	3	4	5	6	7		
5	2	3	4	5	6		

Abbreviations

H	mounting plate height
K	cup boring distance
D	door overlay

TCH-11400 T-X 165 I




Full-cranked

A	H	K	3	4	5	6	7
0	2.5	1.5	0.5				
3	5.5	4.5	3.5	2.5	1.5		
4	6.5	5.5	4.5	3.5	2.5		
5	7.5	6.5	5.5	4.5	3.5		

Abbreviations

H	mounting plate height
K	cup boring distance
A	reveal


Hinges per door

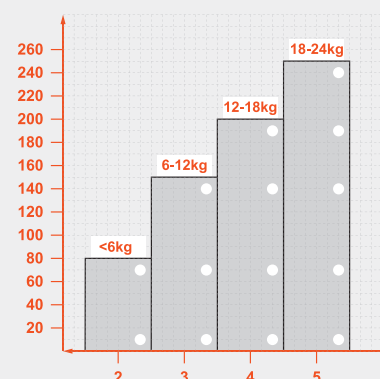


(Door width must not exceed 600 mm)

Application

Face frame cabinet Frameless cabinet



Cup centerpoint dimensions



Available mounting type

