

T-X SOFT-CLOSE ALUMINUM FRAME HINGE

TCH-11400 SERIES




Features

- Opening angle 105°
- Controlled adjustment with gap stability
- Opening angle restrictor integrated into the hinge link
- Soft-close built-in hydraulic damper
- Drilling dimension of hinge head 28mm
- Range of frame width 19mm to 22mm
- Compatible with existing mounting plates
- Nickel plated



TCH-11400 T-X F.28




Straight-arm

D	V	19	20	21	22
0	H	17	18	19	20
3		14	15	16	17
4		13	14	15	16
5		12	13	14	15

Abbreviations

H	mounting plate height
V	cup boring distance
D	door overlay

TCH-11400 T-X H.28




Half-cranked

D	V	19	20	21	22
0	H	7.9	8.9	9.9	10.9
3		4.9	5.9	6.9	7.9
4		3.9	4.9	5.9	6.9
5		2.9	3.9	4.9	5.9

Abbreviations

H	mounting plate height
V	cup boring distance
D	door overlay

TCH-11400 T-X I.28




Full-cranked

A	V	19	20	21	22
0	H	1.6	0.6		
3		4.6	3.6	2.6	1.6
4		5.6	4.6	3.6	2.6
5		6.6	5.6	4.6	3.6


Abbreviations

H	mounting plate height
V	cup boring distance
A	reveal

Hinges per door

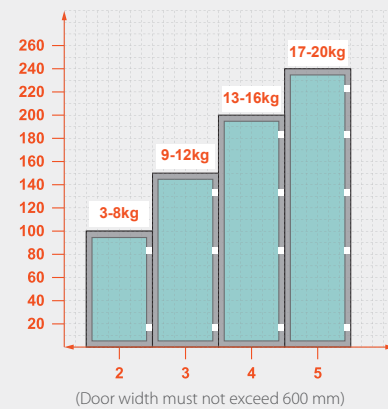

Application

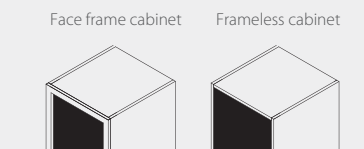

Cup centerpoint dimensions

