

T-X-T PUSH-OPEN ALUMINUM FRAME HINGE

TCH-11400 SERIES




Features

- Open angle 105°
- Controlled adjustment with gap stability
- Opening angle restrictor for integrated into the hinge link
- Built-in hydraulic cylinder for smooth soft opening
- Drilling dimension of hinge head 28mm
- Range of frame width 19mm to 22mm
- Compatible with existing mounting plates
- Nickel plated



TCH-11400 T-XT F.28




Straight-arm

D	H	V	19	20	21	22
0			17	18	19	20
3			14	15	16	17
4			13	14	15	16
5			12	13	14	15

Abbreviations

H	mounting plate height
V	cup boring distance
D	door overlay

TCH-11400 T-XT H.28




Half-cranked

D	H	V	19	20	21	22
0			7.9	8.9	9.9	10.9
3			4.9	5.9	6.9	7.9
4			3.9	4.9	5.9	6.9
5			2.9	3.9	4.9	5.9

Abbreviations

H	mounting plate height
V	cup boring distance
D	door overlay

TCH-11400 T-XT I.28




Full-cranked

A	H	V	19	20	21	22
0			1.6	0.6		
3			4.6	3.6	2.6	1.6
4			5.6	4.6	3.6	2.6
5			6.6	5.6	4.6	3.6


Abbreviations

H	mounting plate height
V	cup boring distance
A	reveal

• Hinges per door

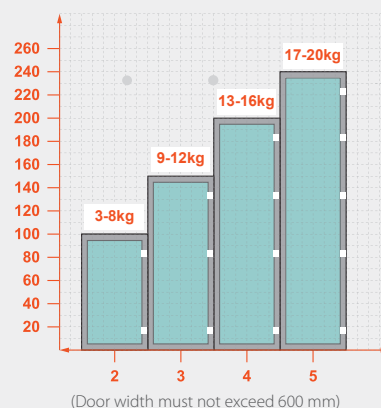

• Application

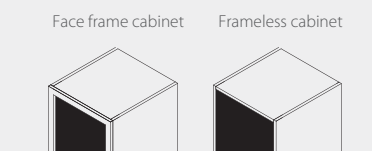

• Cup centerpoint dimensions

