

T-XT PUSH-OPEN STANDARD EUROPEAN HINGES

TCH-11400 SERIES




Features

- Open angle 105°
- Controlled adjustment with gap stability
- Opening angle restrictor for integrated into the hinge link
- Built-in push-open rebound buffer system
- Diameter of hinge cup 35mm
- Boring distance range 3mm to 7mm
- Height of hinge cup 11.5mm
- For door thickness up to 21mm
- Compatible with existing mounting plates
- Finish: Nickel-plated



TCH-11400 T-XT F




Straight-arm

D	H	K	3	4	5	6	7
0			16	17	18	19	20
3			13	14	15	16	17
4			12	13	14	15	16
5			11	12	13	14	15

Abbreviations

H	mounting plate height
K	cup boring distance
D	door overlay

TCH-11400 T-XT H




Half-cranked

D	H	K	3	4	5	6	7
0			7	8	9	10	11
3			4	5	6	7	8
4			3	4	5	6	7
5			2	3	4	5	6

Abbreviations

H	mounting plate height
K	cup boring distance
D	door overlay

TCH-11400 T-XT I




Full-cranked

A	H	K	3	4	5	6	7
0			2.5	1.5	0.5		
3			5.5	4.5	3.5	2.5	1.5
4			6.5	5.5	4.5	3.5	2.5
5			7.5	6.5	5.5	4.5	3.5

Abbreviations

H	mounting plate height
K	cup boring distance
A	reveal

• Hinges per door

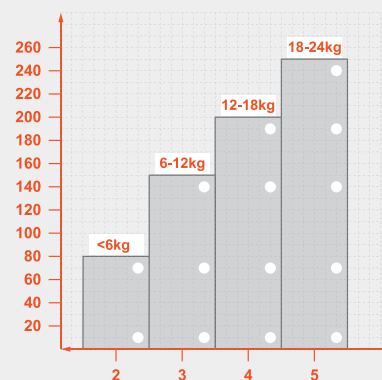


(Door width must not exceed 600 mm)

• Application

Face frame cabinet Frameless cabinet



• Cup centerpoint dimensions



• Available mounting type

